

A

B



C

D

E

### Specifications

Current Rating	: 3 Amps
Insulator Resistance	: 5000 Megohms Min.
Contact Resistance	: 20 m ohms max.
Dielectric Withstanding	: AC 1000 V
Operating Temperature	: -40°C ~ +105°C
Contact Material	: Phosphor Bronze
Insulator Material	: Polyester, UL 94V-0
Finish	: Tin, Gold or Duplex Plated
Standard	: Gold Flash all over

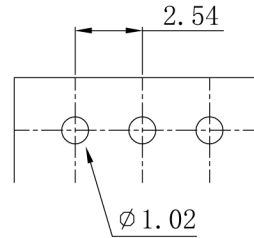


P. C. B. Hole Layout

1

1

2

2



Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F103	X	X	X	DXXX	-XX
(Female Header Single Row) F103 (2.54 H:5.7)	S: Straight Type	G: Gold Flash T: Tin Plated A: 10U" Gold B: 15U" Gold C: 20U" Gold ©Duplex Plating D: Gold Flash/Tin (Standard:G)	P: PBT N: Nylon-6T (Standard:P)	S-D D030 (Standard:S-D030)	(02 TO 40 Contacts)

所有材料為  
"環保材料"  
2006.9.13  
RoHS

△ 此符號表示重點管控尺寸

3

3

DESCRIPTION(內容): <b>2.54mm Female Header 180° H:5.7 W:2.4</b>	DRAWN(製圖): 彭維明	GENERAL TOLERANCE: (公差)	REV: <b>R1</b>	REV	DESCRIPTION	DATE
	CHECKED(確認):	.X .XX .XXX	.XXXX .X° .XX°	UNIT: <b>mm</b>	<del>舊料號: GFBP500L-XX</del> <del>舊料號: F103-XXSP-D30</del> 更新料號	<b>2005.08.13</b> <b>2005.12.04</b> <b>2006.09.13</b>
	PART NO: (料號) <b>F103-SG_-D030-XX</b>	APPROVAL(核准):	SCALE(比例): 1:XX	<b>A4</b>	<b>R2</b>	
	DWG NO(圖號):			<b>SHEET:</b> 1/1	<b>R3</b>	

A

B

C

D

E