


Specifications

Current Rating	: 3 Amps
Insulator Resistance	: 5000 Megohms Min.
Contact Resistance	: 20 m ohms max.
Dielectric Withstanding	: AC 1000 V
Operating Temperature	: -40°C ~ +105°C
Soldering Temperature	: 260°C for 3~5sec Max.
Contact Material	: Brass
Insulator Material	: Polyester, UL 94V-0
Standard	: Nylon-6T
Finish	: Tin, Gold or Duplex Plated
Standard	: Gold Flash all over

剖視圖:A-A

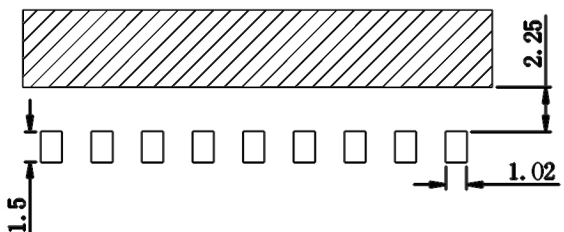

P. C. B Layout

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F101	X	X	X	DXXX	-XX
(Female Header Dual Row F101 (2.54 H:8.5))	K:"K" Type	G:Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold ◎Duplex Plating D: Gold Flash/Tin (Standard:G)	N: Nylon-6T (Standard:N)	K-D D036	(02 TO 40 Contacts)

△ 此符號表示重點管控尺寸

DESCRIPTION(內容): 2.54mm Female Header H:8.5 W:2.40 臥貼式 Nylon-6T	DRAWN(製圖):	GENERAL TOLERANCE: (公差)	REV: A11	REV	DESCRIPTION	DATE
	CHECKED(確認):	X. ±0.30 X. ° 15.0° .X ±0.20 .X ° 13.0° .XX ±0.15 .XX ° 11.0°	UNIT: mm	1		
	PART NO: F101-KGN-D036-XX	APPROVAL(核准):	SCALE(比例): 1:XX	A4	3	
	DWG NO(圖號):			SHEET: 1/1	4	