
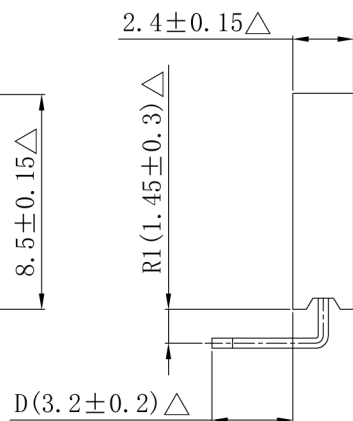


P.C.B. Hole Layout

Specifications

Current Rating	:3 Amps
Insulator Resistance	:5000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 1000 V
Operating Temperature	:-40°C ~ +105°C
Contact Material	:Phosphor Bronze
Finish	:Tin, Gold or Duplex Plated
Standard	:Gold Flash all over

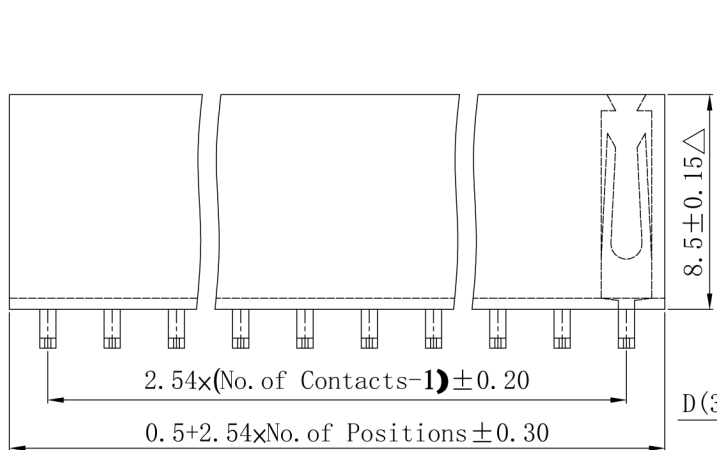

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
<u>F101</u>	- <u>X</u>	<u>X</u>	<u>X</u>	- <u>DXXX</u>	- <u>XX</u>
(Female Header Single Row) F101 (2.54 H:8.5)	R:Right Angle R1:1.45mm	G:Gold Flash T:Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ©Duplex Plating D:Gold Flash/Tin (Standard:G)	P:PBT A:PA46 N:Nylon-6T (Standard:P)	R-D D032 (Standard:R-D032)	(02 TO 40 Contacts)

所有材料為
"環保材料"
2006.10.20
RoHS

△ 此符號表示重點管控尺寸

DESCRIPTION(內容): 2.54mm Female Header H:8.5 W:2.4 90°	DRAWN(製圖): 劉建平	GENERAL TOLERANCE:(公差)	REV: R1	REV	DESCRIPTION	DATE	
	CHECKED(確認):	.X .XX .XXX	.XXXX .X° .XX°	UNIT: mm	R0	舊料號: CPEBRC06XK	
	PART NO:(料號): F101-R1G_-D032-XX	APPROVAL(核准):	SCALE(比例): 1:XX	SIZE: A4	R1	更新料號	2005.10.20
	DWG NO(圖號):			SHEET: 1/1	R2		
				R3			