
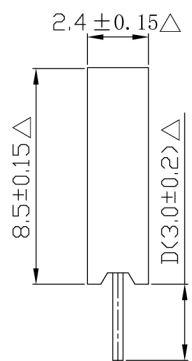


P.C.B. Hole Layout

Specifications

Current Rating : 3 Amps
 Insulator Resistance : 5000 Megohms Min.
 Contact Resistance : 20 m ohms max.
 Dielectric Withstanding : AC 1000 V
 Operating Temperature : -40°C ~ +105°C
 Contact Material : Phosphor Bronze
 Insulator Material : Polyester, UL 94V-0
 Finish: Tin, Gold or Duplex Plated
 Standard: Gold Flash all over
 Note:
 Duplex plating: Gold Plated on contact area,
 Tin on solder area

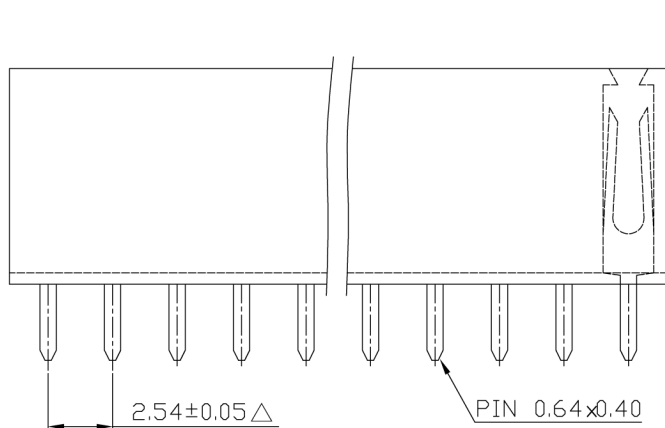

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F101	X	X	X	DXXX	X X
(Female Header Single Row) F101 (2.54 H: 8.5)	S: Straight Type	G: Gold Flash T: Tin Plated A: 10U" Gold B: 15U" Gold C: 20U" Gold ©Duplex Plating D: Gold Flash/Tin (Standard: G)	P: PBT N: Nylon-6T (Standard: P)	S-D D030 (Standard: S-D030)	(02 TO 40 Contacts)

所有材料為
"環保材料"
2006.4.18
RoHS

△ 此符號表示重點管控尺寸

DESCRIPTION(內容):	DRAWN(製圖): Kevin	GENERAL TOLERANCE: (公差)	REV:	REV	DESCRIPTION	DATE
			R2			
2.54mm Female Header H:8.5 W:2.4 180°	CHECKED(確認):	.X .XX .XXX	UNIT:	R0	舊料號: 06PES0101X	2006.04.18
			mm	R1	更新料號	2006.07.12
PART NO: (料號) F101-SG_-D030-XX	APPROVAL(核准):	SCALE(比例): 1:XX	A4	R2	變更環保章字樣	2006.08.15
DWG NO(圖號):			SHEET: 1/1	R3		