



A

B

C



D

E

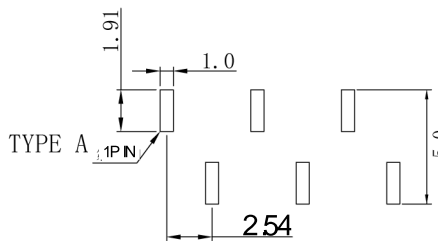


**Specifications**

TYPE A	Current Rating	:3 Amps
	Insulator Resistance	:5000 Megohms min.
	Dielectric Withstanding	:AC 1000 V
	Operating Temperature	:-40°C ~ +105°C
	Max Processing Temp	:260°C for 3 ~ 5 sec Max.
	Contact Material	:Copper Alloy
	Insulator Material	:Polyester, UL 94V-0
	Standard	:Nylon-6T
TYPE B	Finish: Tin, Gold or Duplex Plated	
	Standard: Gold Flash all over	

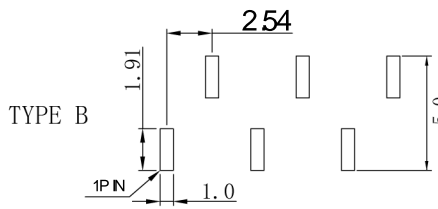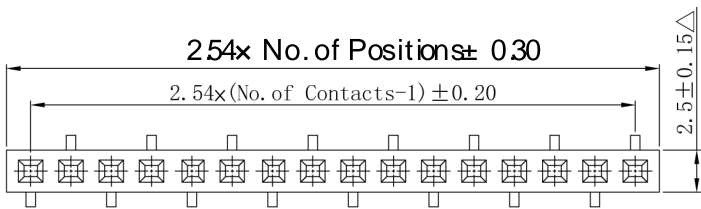

**P . C . B . Hole Layout**

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Other Contacts	Other
<u>F102</u>	- <u>X</u>	<u>X</u>	<u>X</u> - <u>DXXX</u>	<u>-XX</u>	<u>-XT</u>	
(Female Header Single Row) F102 (2.54 H:7.1)	M:SMT Type	G:Gold Flash T: Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ©Duplex Plating D:Gold Flash/Tin (Standard:G)	N:Nylon-6T (Standard:N) M-D D040	(02 TO 40 Contacts)	AT:TYPE A BT:TYPE B	

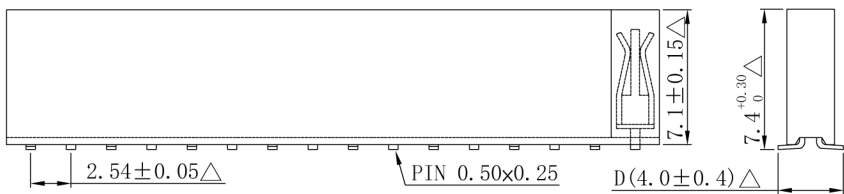

所有材料為  
"環保材料"  
2006.8.28  
RoHS

△ 此符號表示重點管控尺寸

DESCRIPTION(內容): <b>2.54mm Female Header H:7.1 W:2.5 SMT Nylon-6T</b>	DRAWN(製圖): 劉兵	GENERAL TOLERANCE:(公差)	REV: <b>R2</b>	REV	DESCRIPTION	DATE	
	CHECKED(確認):	.X .XXXX .XX .X° .XXX .XX°	UNIT: mm	<b>R0</b>	舊料號: <del>C06P100P XSNL-B</del>	<b>2006.02.16</b>	
	PART NO:(料號): <b>F102-MGN-D040-XX-XT</b>	APPROVAL(核准):	SCALE(比例): 1:XX	A4 SHEET: 1/1	<b>R1</b>	更新料號	<b>2006.07.11</b>
	DWG NO(圖號):			<b>R2</b>	修正 Hole Layout	<b>2006.12.11</b>	
			<b>R3</b>				

A

B

C

D

E