

A

B



C

D

E

Specifications

- Current Rating : 3 Amps
- Insulator Resistance : 5000 Megohms Min.
- Contact Resistance : 20 m ohms max.
- Dielectric Withstanding : AC 1000 V
- Operating Temperature : -40°C ~ +105°C
- Contact Material : Phosphor Bronze
- Insulator Material : Polyester, UL 94V-0
- Finish: Tin, Gold or Duplex Plated
- Standard: Gold Flash all over

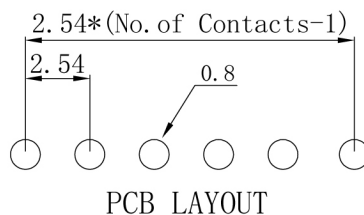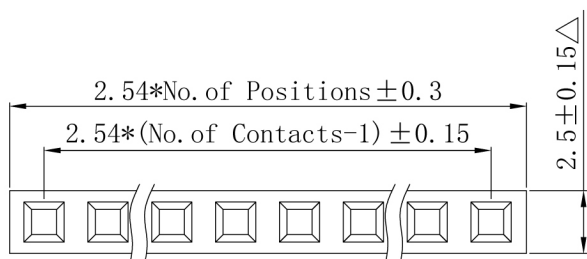


1

1

2

2

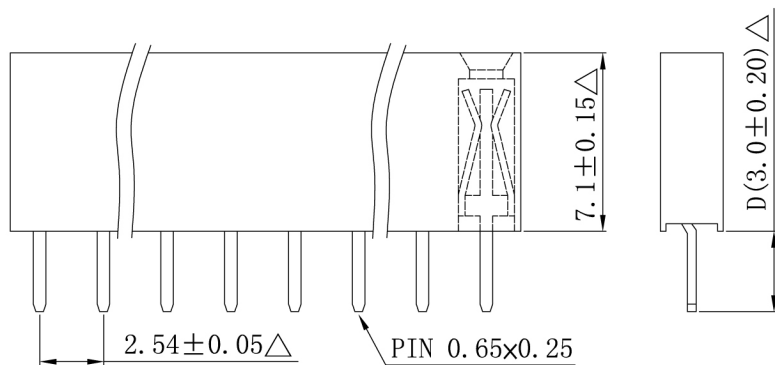

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F102	X	X	X	DXXX	-XX
(Female Header Single Row) F102 (2.54 H: 7.1)	S: Straight Type	G: Gold Flash T: Tin Plated A: 10U" Gold B: 15U" Gold C: 20U" Gold ©Duplex Plating D: Gold Flash/Tin (Standard: G)	P: PBT N: Nylon-6T (Standard: P)	S-D D030 (Standard: S-D030)	(02 TO 40 Contacts)

所有材料為
"環保材料"
2006.10.17
RoHS

△ 此符號表示重點管控尺寸

3

3

DESCRIPTION(內容): 2.54mm Female Header H:7.1 W:2.5 180°	DRAWN(製圖): 劉建平	GENERAL TOLERANCE: (公差)		REV: R1	REV	DESCRIPTION	DATE
	CHECKED(確認):	.X .XX .XXX	.XXXX .X° .XX°	UNIT: mm	R0	舊料號: C08P/F102/XX 舊料號: F102/XXSG/D030	2005.08.13 2005.12.04
	PART NO: (料號) F102-SG_-D030-XX	APPROVAL(核准):	SCALE(比例): 1:XX	SIZE: A4	R1	更新料號	2006.06.02
	DWG NO(圖號):			SHEET: 1/1	R2		
				R3			

A

B

C

D

E