


Specifications

Current Rating	:3 Amps
Insulator Resistance	:5000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 1000 V
Operating Temperature	:-40°C ~ +105°C
Contact Material	:Brass
Insulator Material	:Polyester, UL 94V-0
Standard	:Nylon-6T
Finish:	Tin, Gold or Duplex Plated
Standard:	Gold Flash all over

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F105	X	X	X	DXXX	-XX
(Female Header Single Row) F105(2.54 H:3.5)	S: Straight Type	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold ©Duplex Plating D: Gold Flash/Tin (Standard:G)	N: Nylon-6T (Standard:N)	S-D D025 (Standard:S-D025)	(02 TO 40 Contacts)

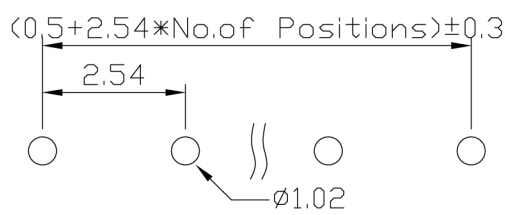

RECOMMENDED P.C.BOARD HOLE LAYOUT

所有材料為
"環保材料"
2006.11.06
RoHS

△ 此符號表示重點管控尺寸

DESCRIPTION(內容): 2.54mm Female Header H:3.5 W:2.54 180° Nylon-6T	DRAWN(製圖): 劉兵	GENERAL TOLERANCE:(公差)	REV: R1	REV	DESCRIPTION	DATE	
	CHECKED(確認):	.X .XXXX .XX .X° .XXX .XX°	UNIT: mm	R0	舊料號: C09A83C01.XX 舊料號: F105-XSOND025	2005.08.13 2005.12.04	
	PART NO:(料號): F105-SGN-D025-XX	APPROVAL(核准):	SCALE(比例): 1:XX	SIZE: A4	R1	更新料號	2005.06.03
	DWG NO(圖號):			SHEET: 1/1	R2		
				R3			