


P. C. B Layout

### Specifications

Current Rating	:3 Amps
Insulator Resistance	:5000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 1000 V
Operating Temperature	:-40°C ~ +105°C
Contact Material	:Phosphor Bronze
Insulator Material	:Polyester, UL 94V-0
Finish:	Tin, Gold or Duplex Plated
Standard:	Gold Flash all over

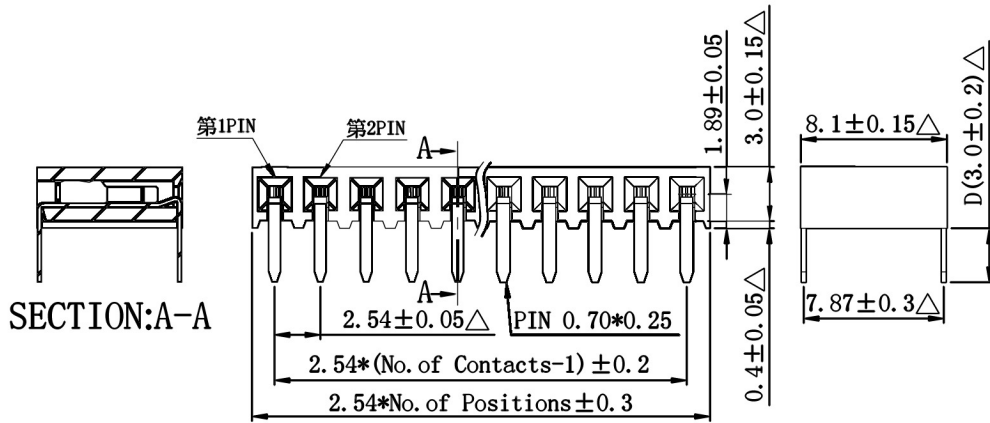

SECTION:A-A

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
<b>F108</b>	- <b>X</b>	<b>X</b>	<b>X</b> -	<b>DXXX</b> -	<b>XX</b>
(Female Header Single Row) F108(2.54 H:8.1 W:3.4)	R:Right Angle	G:Gold Flash T:Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold E:1.5U"Gold ©Duplex Plating D:Gold Flash/Tin (Standard:G)	P:PBT A:PA46 N:Nylon-6T (Standard:P)	R-D D030 (Standard:R-D030)	(02 TO 40 Contacts)



△ 此符号表示重点管控尺寸

	DESCRIPTION(内容): <b>2.54mm Female Header H:8.1 W:3.4 90°</b>	DRAWN(製圖): 劉建平	GENERAL TOLERANCE: (公差)	REV: <b>R0</b>	REV	DESCRIPTION	DATE	
	PART NO: 料號) <b>F108-RG _-D030-XX</b>	CHECKED(確認): 師會營	.X .XX .XXX	.XXXX .X° .XX°	UNIT: <b>mm</b>	<b>R0</b>		<b>2007.01.06</b>
	DWG NO(圖號):	APPROVAL(核准):	SCALE(比例): 1:XX	◎	SIZE: <b>A4</b>	<b>R1</b>		
					SHEET: 1/1	<b>R2</b>		
					<b>R3</b>			