

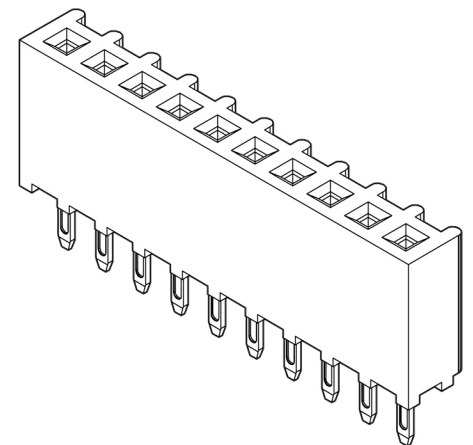


A B C D E




Specifications

Current Rating	: 3 Amps
Insulator Resistance	: 5000 Megohms Min.
Contact Resistance	: 20 m ohms max.
Dielectric Withstanding	: AC 1000 V
Operating Temperature	: -40°C ~ +105°C
Contact Material	: Phosphor Bronze
Insulator Material	: Polyester, UL 94V-0

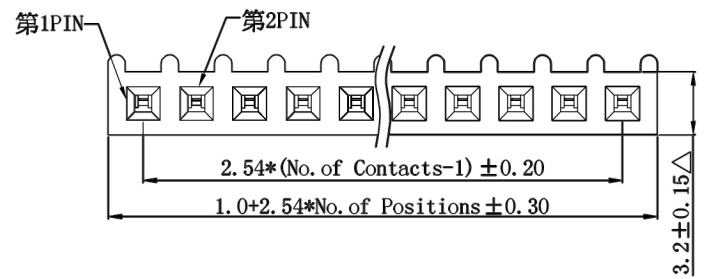

Finish: Tin, Gold or Duplex Plated
Standard: Gold Flash all over

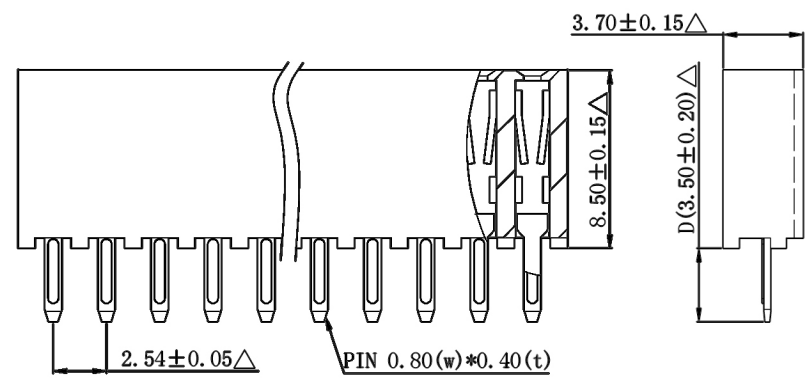

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F192	X	X	X	DXXX	XX
(Female Header Single Row)	S: Straight Type	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold ©Duplex Plating D: Gold Flash/Tin (Standard:G)	P: PBT N: Nylon-6T (Standard:P)	S-D D035 (Standard:S-D035)	(02 TO 40 Contacts)
F192(2.54 H:8.5 W:3.7)					

所有材料為
"環保材料"
2006.10.04
RoHS

△ 此符號表示重點管控尺寸

DESCRIPTION(內容): 2.54mm Female Header 180° H:8.5 W:3.70 波浪型	DRAWN(製圖): 劉建平	GENERAL TOLERANCE: (公差)	REV: R1	REV	DESCR		
	CHECKED(確認):	.X .XX .XXX	.XXXX .X° .XX°	UNIT: mm	R0	舊料號: CCPBA830S01x3 舊料號: F101-XXSGP-D035-W1	2005.12.04 2006.06.10
	PART NO: (料號) F192-SG_-D035-XX	APPROVAL(核准):	SCALE(比例): XX:XX	SIZE: A4	R1	變更端子規格	
	DWG NO(圖號):			SHEET: 1/1	R2 R3		

A B C D E Q/Y FILE NO: