


P. C. B. Layout

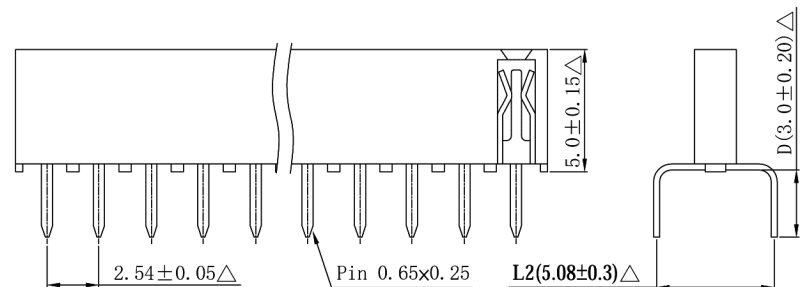

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts	Other
F194	X	X	X	DXXX	X X	X T
(Female Header Single Row) F194(2.54 H:5.0 With stand off)	L: 蜈蚣腳 L2: 5.08MM	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold ©Duplex Plating D: Gold Flash/Tin (Standard:G)	P: PBT N: Nylon-6T (Standard:P)	R-D D030 (Standard:R-D028)	(02 TO 40 Contacts)	AT:A TYPE BT:B TYPE

所有材料為  
"環保材料"  
2006.4.12  
RoHS

### Specifications

- Current Rating : 3 Amps
- Insulator Resistance : 5000 Megohms Min.
- Contact Resistance : 20 m ohms max.
- Dielectric Withstanding : AC 1000 V
- Operating Temperature : -40°C ~ +105°C
- Contact Material : Phosphor Bronze
- Insulator Material : Polyester, UL 94V-0
- Finish: Tin, Gold or Duplex Plated
- Standard: Gold Flash all over
- Note:  
Duplex plating: Gold Plated on contact area,  
Tin on solder area

DESCRIPTION(內容): <b>2.54mm Female Header H:5.0 W:2.54</b> 蜈蚣腳排母	DRAWN(製圖): 彭維明	GENERAL TOLERANCE: (公差)	REV: <b>R2</b>	REV	DESCRIPTION	DATE	
	CHECKED(確認):	.X .XX .XXX	.XXXX .X° .XX°	UNIT: <b>mm</b>	<b>R0</b>	舊料號: <del>C6F8E00C04MS</del> 舊料號: <del>F194-XL2P-D030-AT</del>	<b>2006.04.12</b>
	PART NO: (料號) <b>F194-L2G_-D030-XX-XT</b>	APPROVAL(核准):	SCALE(比例): 1:XX	<b>A4</b>	<b>R1</b>	更新料號	<b>2006.07.31</b>
	DWG NO(圖號):			SHEET: <b>1/1</b>	<b>R2</b>	變更環保章字樣	<b>2006.08.15</b>
				<b>R3</b>			