



A Type

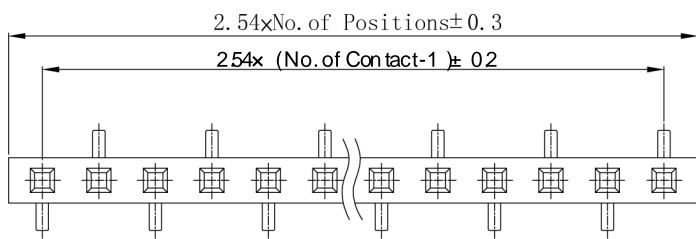


B Type

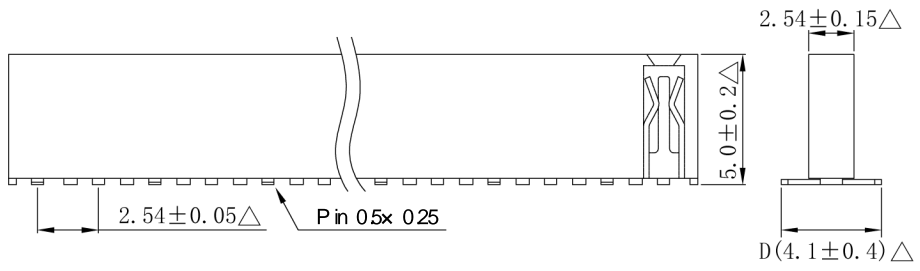

SPECIFICATIONS

Current Rating : 3 Amps
 Insulator Resistance : 5000 Megohms Min.
 Contact Resistance : 20 Milliohms Max.
 Dielectric Withstanding : AC 500 V
 Operating Temperature : -40°C TO +105°C
 Contact Material : Phosphor Bronze
 Insulator Material : Polyester, UL94V-0
 Standard : Nylon-6T
 Contact Plated : Full Gold, Full Tin, Selective Plated

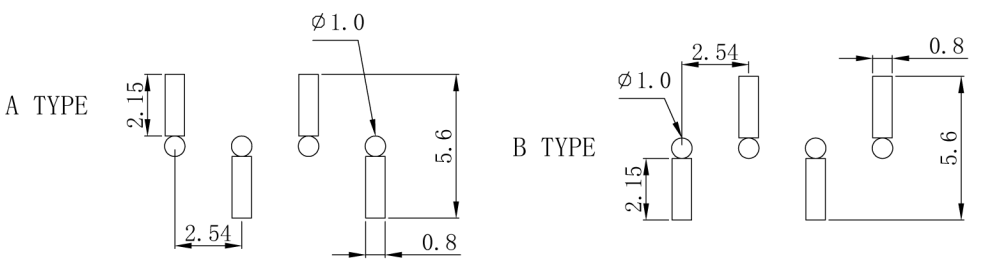

P. C. B. Hole Layout

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts	Other
F194	X	X	X	DXXX	X X	X T
(Female Header Single Row)	M: SMT Type	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold ©Duplex Plating D: Gold Flash/Tin (Standard: G)	N: Nylon-6T (Standard: N)	M-D D041	(02 TO 40 Contacts)	AT: TYPE A BT: TYPE B

所有材料為
"環保材料"
2006.3.6
RoHS

△ 此符號表示重點管控尺寸

DESCRIPTION(內容):	DRAWN(製圖):	GENERAL TOLERANCE:	REV:	REV	DESCRIPTION	DATE
	2.54mm Female Header H:5.0 W:2.54 SMT Nylon-6T	彭維明	(公差)			
PART NO: (料號) F194-MGN-D041-XX-XT	CHECKED(確認):	.X .XXXX .XX .X° .XXX .XX°	UNIT: mm	R1	更新料號	2006.07.28
DWG NO(圖號):	APPROVAL(核准):	SCALE(比例): 1:XX	A4 SHEET: 1/1	R2	變更環保章字樣	2006.08.15
				R3		