


Specifications

Current Rating	:3 Amps
Insulator Resistance	:5000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 1000 V
Operating Temperature	:-40°C ~ +105°C
Contact Material	:Phosphor Bronze
Insulator Material	:Polyester, UL 94V-0
Finish:	Tin, Gold or Duplex Plated
Standard:	Gold Flash all over

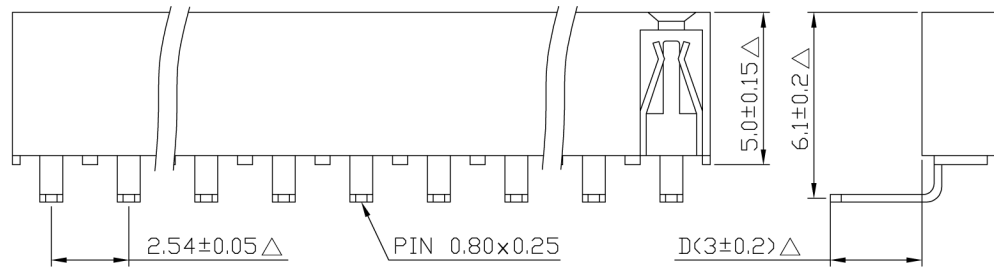

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F194	- X	X	X	- DXXX	- XX
(Female Header Single Row) F194(2.54 H:5.0 With stand off)	R:Right Angle	G:Gold Flash T:Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ©Duplex Plating D:Gold Flash/Tin (Standard:G)	P:PBT N:Nylon-6T (Standard:P)	R-D D030 (Standard:R-D30)	(02 TO 40 Contacts)

所有材料為
"環保材料"
2006.7.11
RoHS

△ 此符號表示重點管控尺寸

DESCRIPTION(內容): 2.54mm Female Header H:5.0 90°	DRAWN(製圖): Kevin	GENERAL TOLERANCE:(公差)	REV: R2	REV	DESCRIPTION	DATE	
	CHECKED(確認): Mandy	.X .XXXX .XX .X° .XXX .XX°	UNIT: mm	R0		2006.07.11	
	PART NO:(料號): F194-RG_-D030-XX	APPROVAL(核准): Jonny	SCALE(比例): 1:XX	SIZE: A4	R1	變更環保章字樣	2006.08.15
	DWG NO(圖號):			SHEET: 1/1	R2	原塑膠總長加膠 07 改為不加膠	2007.03.13
				R3			