


P. C. B. Hole Layout

Specifications

Current Rating	:3 Amps
Insulator Resistance	:5000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 1000 V
Operating Temperature	:-40°C ~ +105°C
Contact Material	:Brass
Insulator Material	:Polyester, UL 94V-0
Finish:	Tin, Gold or Duplex Plated
Standard:	Gold Flash all over

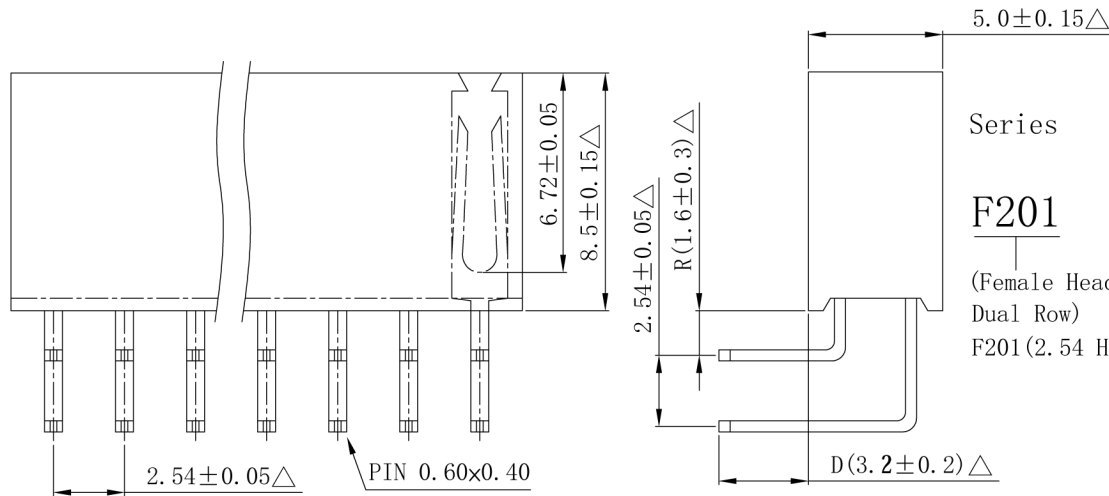

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F201	X	X	X	DXXX	-XX
(Female Header Dual Row) F201(2.54 H:8.5)	R:Right Angle R:1.6mm	G:Gold Flash T:Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ©Duplex Plating D:Gold Flash/Tin (Standard:G)	P:PBT N:Nylon-6T (Standard:P)	R-D D032 (Standard:R-D032)	(04 TO 80 Contacts)

所有材料為
"環保材料"
2006.11.09
RoHS

△ 此符號表示重點管控尺寸

PART NO: (料號) F201-RG_-D032-XX DWG NO(圖號):	DESCRIPTION(內容): 2.54mm Female Header H:8.5 W:5.0 90°	DRAWN(製圖): Kevin	GENERAL TOLERANCE: (公差)	REV: R0	REV	DESCRIPTION	DATE
		CHECKED(確認):	.X .XXXX .XX .X° .XXX .XX°	UNIT: mm	R0		2006.11.09
		APPROVAL(核准):	SCALE(比例): 1:XX	SIZE: A4	R1		
				SHEET: 1/1	R2		
					R3		