
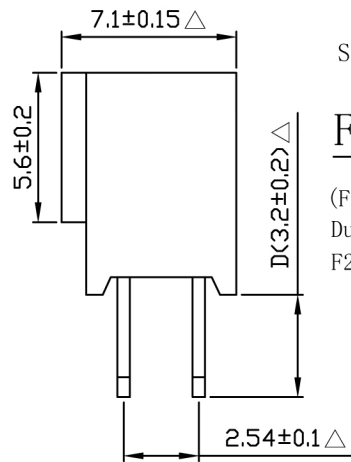


P. C. B. Hole Layout

Specifications

Current Rating	: 3 Amps
Insulator Resistance	: 5000 Megohms Min.
Contact Resistance	: 20 m ohms max.
Dielectric Withstanding	: AC 1000 V
Operating Temperature	: -40°C ~ +105°C
Contact Material	: Brass
Insulator Material	: Polyester, UL 94V-0
Finish	: Tin, Gold or Duplex Plated
Standard	: Gold Flash all over

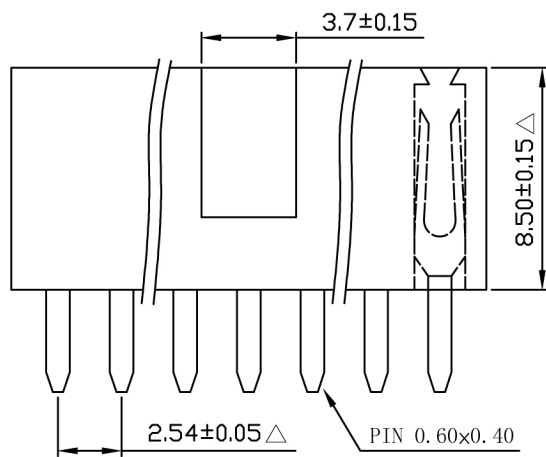

△ 此符號表示重點管控尺寸

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts	Other
F201	X	X	X	DXXX	-XX	-H
(Female Header Dual Row) F201 (2.54 H:8.5)	S: Straight Type	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold ● Duplex Plating D: Gold Flash/Tin (Standard: G)	P: PBT N: Nylon-6T (Standard: P)	S-D D032 (Standard: S-D030)	(04 TO 80 Contacts)	H: 防呆無倒角

DESCRIPTION(內容): 2.54mm Female Header H:8.5 W:7.1 180° Y型端 防呆無倒角 PART NO: (料號) F201-SG_-D032-XX-H DWG NO(圖號):	DRAWN(製圖): CHECKED(確認):	GENERAL TOLERANCE: (公差) X. ±0.30 X.° 1/8.0 ¹ .X 0.20 .X° 1/32.0 ¹ .XX 0.15 .XX° 1/64.0 ¹	REV: A/1 UNIT: mm SIZE: A4 SHEET: 1/1	REV 1 2 3 4	DESCRIPTION 	DATE
	APPROVAL(核准):	SCALE(比例): 1:XX				