

A

B



C

D


E

Specifications

- Current Rating : 3 Amps
- Insulator Resistance : 5000 Megohms Min.
- Contact Resistance : 20 m ohms max.
- Dielectric Withstanding : AC 1000 V
- Operating Temperature : -40°C ~ +105°C
- Contact Material : Phosphor Bronze
- Insulator Material : Polyester, UL 94V-0
- Finish: Tin, Gold or Duplex Plated
- Standard: Gold Flash all over

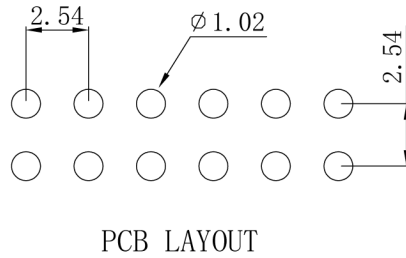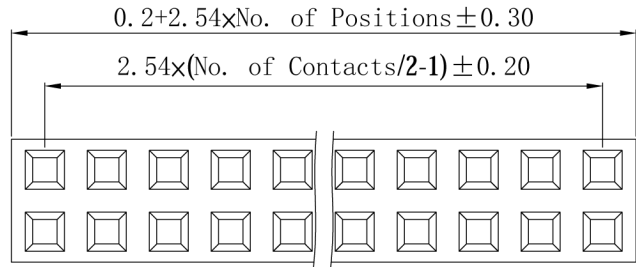

PCB LAYOUT

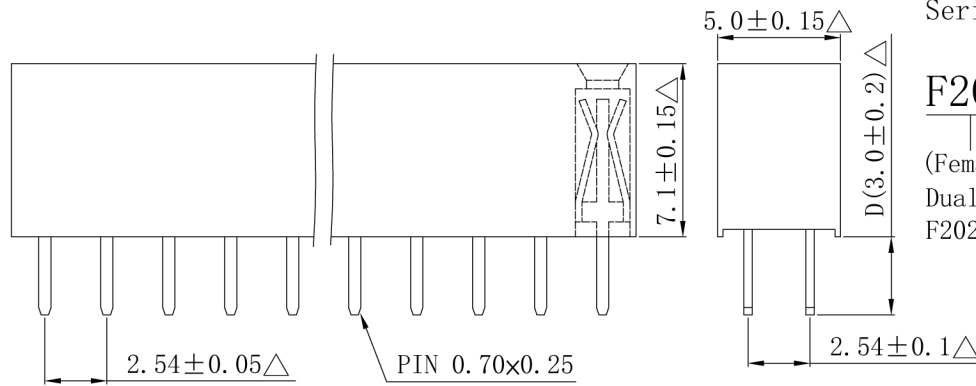

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F202	X	X	X	DXXX	-XX
(Female Header Dual Row) F202 (2.54 H: 7.1)	S: Straight Type	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold ©Duplex Plating D: Gold Flash/Tin (Standard: G)	P: PBT N: Nylon-6T (Standard: P)	S-D D030 (Standard: S-D030)	(04 TO 80 Contacts)

所有材料為
"環保材料"
2006.9.25
RoHS

△ 此符號表示重點管控尺寸

DESCRIPTION(內容): 2.54mm Female Header 180° H:7.1 W:5.0	DRAWN(製圖): 劉兵	GENERAL TOLERANCE: (公差)	REV: R1	REV	DESCRIPTION	DATE	
	CHECKED(確認):	.X .XX .XXX	.XXXX .X° .XX°	UNIT: mm	R0	舊料號: GPB913CB-XX 舊料號: F202-NSG-D030 更新料號	2005.08.13 2005.12.04 2005.06.03
	PART NO: (料號) F202-SG_-D030-XX	APPROVAL(核准):	SCALE(比例): 1:XX	SIZE: A4	R1		
	DWG NO(圖號):			SHEET: 1/1	R2		
				R3			

A

B

C

D

E