
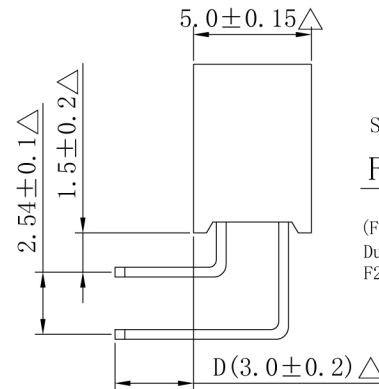


Specifications

Current Rating	: 3 Amps
Insulator Resistance	: 5000 Megohms Min.
Contact Resistance	: 20 m ohms max.
Dielectric Withstanding	: AC 1000 V
Operating Temperature	: -40°C ~ +105°C
Contact Material	: Brass
Insulator Material	: Polyester, UL 94V-0

Finish: Tin, Gold or Duplex Plated
Standard: Gold Flash all over

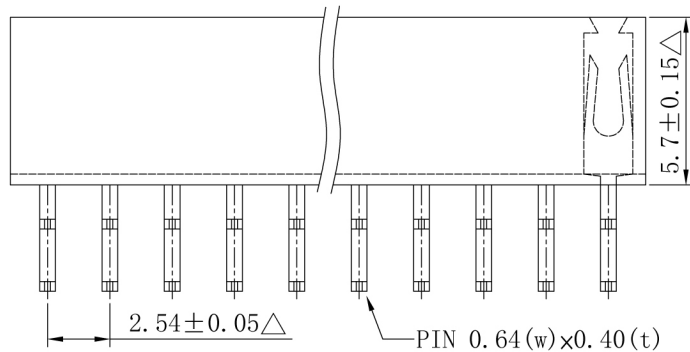

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F203	X	X	X	DXXX	-XX
(Female Header Dual Row) F203 (2.54 H:5.7)	R: Right Angle	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold ⊙ Duplex Plating D: Gold Flash/Tin (Standard: G)	P: PBT N: Nylon-6T (Standard: P)	R-D D030 (Standard: R-D030)	(04 TO 80 Contacts)

所有材料為
"環保材料"
2008.5.08
RoHS

△ 此符號表示重點管控尺寸

DESCRIPTION(內容): 2.54mm Female Header H:5.7 W:5.00 90°	DRAWN(製圖): 劉建平	GENERAL TOLERANCE:(公差): .X .XXX .XX .X° .XXX .XX°	REV: R0	REV	DESCRIPTION	DATE	
	CHECKED(確認):		UNIT: mm	R0	舊料號: C085002XX	2005.12.04	
	PART NO:(料號): F203-RG_-D030-XX	APPROVAL(核准):	SCALE(比例): 1:XX	SIZE: A4	R1		
	DWG NO(圖號):			SHEET: 1/1	R2		
				R3			