


Recommended P. C. Board Hole Layout

Specifications

Current Rating	:3 Amps
Insulator Resistance	:5000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 1000 V
Operating Temperature	:-40°C ~ +105°C
Contact Material	:Phosphor Bronze
Insulator Material	:Polyester, UL 94V-0

Finish: Tin, Gold or Duplex Plated
Standard: Gold Flash all over

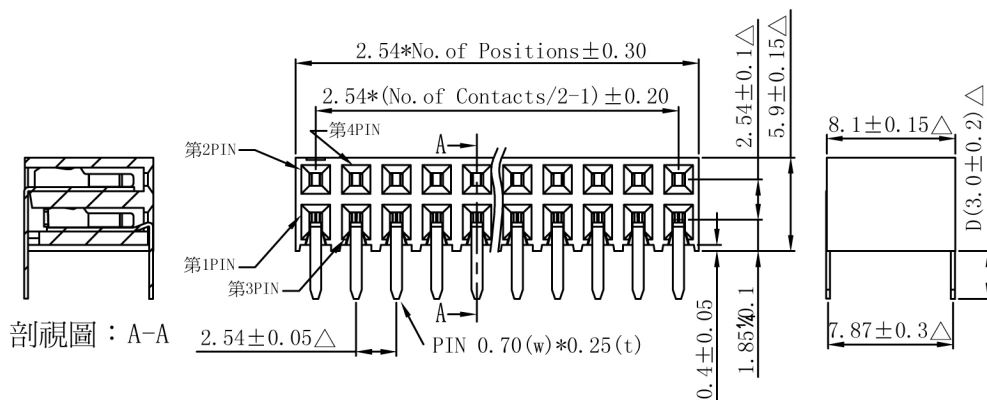

剖視圖：A-A

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F208	X	X	X	DXXX	-XX
(Female Header Dual Row) F208 (2.54 H:8.1 W:5.9)	R:Right Angle	G:Gold Flash T: Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold E:1.5U"Gold ◎Duplex Plating D:Gold Flash/Tin (Standard:G)	N:Nylon-6T	R-D D030 (Standard:R-D030)	(04 TO 80 Contacts)

△ 此符號表示重點管控尺寸

	DESCRIPTION(內容): 2.54mm Female Header 90° H:8.1 W:5.9 雙排側插	DRAWN(製圖):	GENERAL TOLERANCE: (公差)	REV: A/1	REV	DESCRIPTION	DATE	
		CHECKED(確認):	.X .XX .XXX	UNIT: mm	1			
	PART NO: (料號) F208-RGN-D030-XX	APPROVAL(核准):	SCALE(比例): XX:XX	SIZE: A4	3			
	DWG NO(圖號):			SHEET: 1/1	4			