


P. C. B Layout

Specifications

Current Rating	:3 Amps
Insulator Resistance	:5000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 1000 V
Operating Temperature	:-40°C ~ +105°C
Soldering Temperature	:260°C for 3~5 sec Max.
Contact Material	:Phosphor Bronze
Insulator Material	:Polyester, UL 94V-0
Standard	:Nylon-6T
Finish	:Tin, Gold or Duplex Plated
Standard	:Gold Flash all over

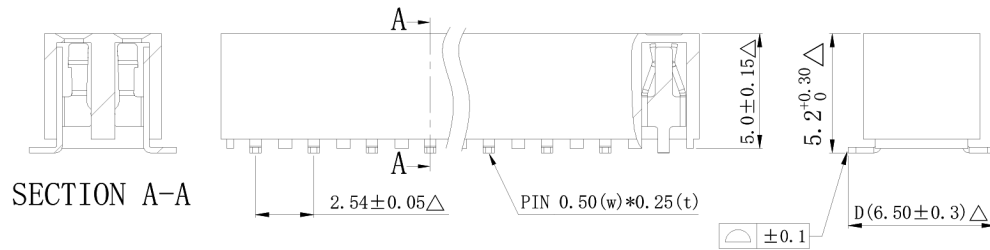

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F294	X	X	X	DXXX	XX
(Female Header Dual Row) F294 (2.54 H:5.0 With stand off)	M:SMT Type	G:Gold Flash T:Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ©Duplex Plating D:Gold Flash/Tin (Standard:G)	N:Nylon-6T (Standard:N)	M-D D065 (Standard:M-D065)	(04 TO 80 Contacts)



DESCRIPTION(內容): 2.54mm Female Header H:5.0 W:5.08 Nylon-6T SMT PART NO: (料 號) F294-MGN-D065-XX DWG NO(圖號):	DRAWN(製圖): 黃玉美	GENERAL TOLERANCE (公差) .X .XXX .XX .X° .XXX .XX°	REV: R1	REV	DESCRIPTION	DATE
	CHECKED(確認):	SCALE 比例: 1:XX	UNIT: mm	R0	舊料號: CPB-8002-85 更新料號 舊料號: F294-MGN-D065 更新料號	2005.08.13 2006.06.10
	APPROVAL(核准):		A4	R1	圖面版本更新	2008.07.15
			SHEET: 1/1	R2 R3		