
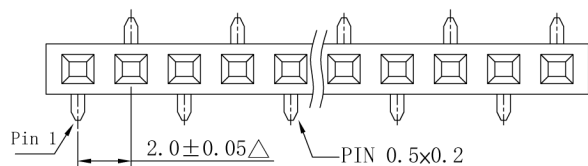



A TYPE

A TYPE

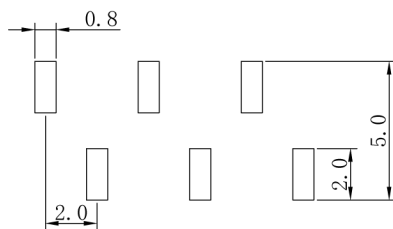

B TYPE


B TYPE

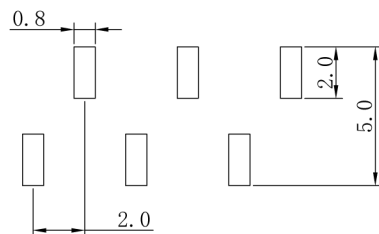

P.C.B. Hole Layout

Specifications

Current Rating	:2 Amp
Insulator Resistance	:3000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 500 V
Operating Temperature	:-40°C ~ +105°C
Contact Material	:Phosphor Bronze.
Insulator Material	:Polyester, UL 94V-0
Standard	:Nylon-6T
Finish:	Tin, Gold or Duplex Plated
Standard:	Gold Flash all over
Note:	Duplex plating: Gold Plated on contact area, Tin on solder area

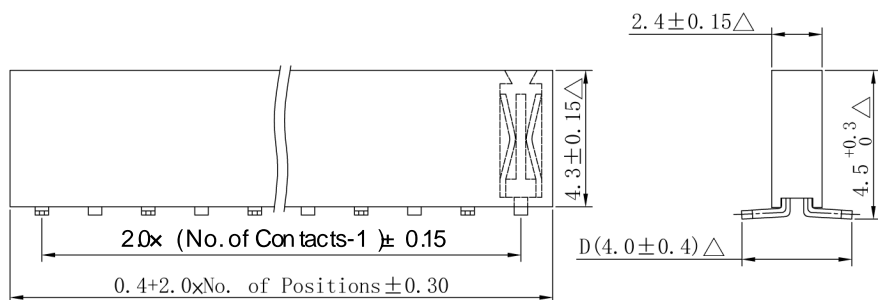

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts	Other
<u>F301</u>	- <u>X</u>	<u>X</u>	<u>X</u>	- <u>DXXX</u>	- <u>XX</u>	- <u>XT</u>
(Female Header Single Row) F301 (2.00 H:4.3)	M:SMT Type	G:Gold Flash T:Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ©Duplex Plating D:Gold Flash/Tin (Standard:G)	N:Nylon-6T (Standard:N)	M-D D040 (Standard:M-D040)	(02 TO 40 Contacts)	AT:TYPE A BT:TYPE B

所有材料為
"環保材料"

2006.2.17

RoHS

△ 此符號表示重點管控尺寸

DESCRIPTION(內容)	DRAWN(製圖):	GENERAL TOLERANCE:	REV:	REV	DESCRIPTION	DATE
	mimi	(公差)	R2			
2.0mm Female Header H:4.3 W:2.4 SMT	CHECKED(確認):	.X .XX .XXX	.XXXX .X° .XX°	UNIT:	R0	2005.08.13
	MANDY			mm	R1	2006.05.20
PART NO:	APPROVAL(核准):	SCALE(比例):	SIZE:	A4	R2	2006.07.27
(料號) F301-MGN-D040-XX-XT	JOHNNY	1:XX	SHEET:	1/1	R3	2006.08.15
DWG NO(圖號):						2006.12.11
						2007.12.12