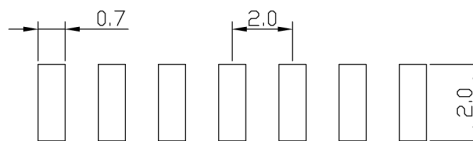
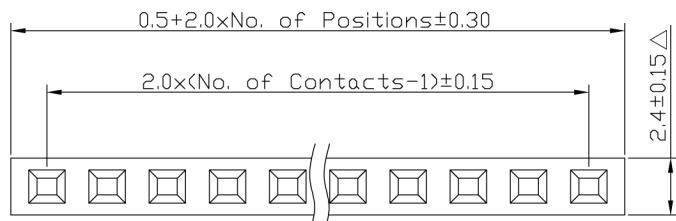


A**B****C****D****E**

P.C.B. Hole Layout

Specifications



Current Rating	:2 Amp
Insulator Resistance	:3000 Megohms Min.
Contact Resistance	:20 m ohms Max.
Dielectric Withstanding	:AC 500 V
Operating Temperature	:-40°C ~ +105°C
Soldering Temperature	:260°C for 3 ~ 5sec Max.
Contact Material	:Phosphor Bronze.
Insulator Material	:Polyester, UL 94V-0
Standard	:Nylon-6T
Finish:	Tin, Gold or Duplex Plated
Standard:	Gold Flash all over
Note:	Duplex plating: Gold Plated on contact area, Tin on solder area

1

1

2

2

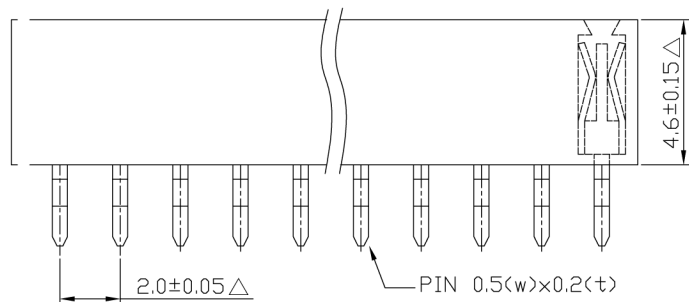

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F303	- X	X	X	- DXXX	- XX
(Female Header Single Row) F303(2.00 H:4.6 W:2.4)	K:"K" Type	G:Gold Flash T:Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ©Duplex Plating D:Gold Flash/Tin (Standard:G)	N:Nylon-6T (Standard:N)	K-D D027	(02 TO 40 Contacts)

所有材料為
"環保材料"
2008.6.11
RoHS

△ 此符號表示重點管控尺寸

3

3

	DESCRIPTION(內容): 2.0mm Female Header H:4.6 W:2.4 臥貼式 Nylon-6T	DRAWN(製圖): 劉建平	GENERAL TOLERANCE: (公差)	REV: R0	REV	DESCRIPTION	DATE
	PART NO: (料號) F303-KGN-D027-XX	CHECKED(確認):	.X .XX .XXX	UNIT: mm	R0		2007.03.06
	DWG NO(圖號):	APPROVAL(核准):	SCALE(比例): XX:XX	SIZE: A4	R1		
				SHEET: 1/1	R2		
					R3		

A**B****C****D****E**