
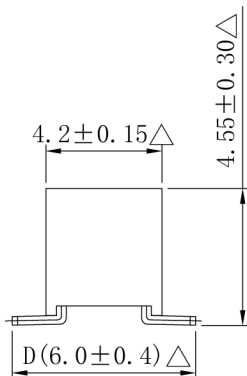


P. C. B. Hole Layout

Specifications

- Current Rating : 2 Amp
- Insulator Resistance : 3000 Megohms Min.
- Contact Resistance : 20 m ohms max.
- Dielectric Withstanding : AC 500 V
- Operating Temperature : -40°C ~ +105°C
- Contact Material : Phosphor Bronze.
- Insulator Material : Polyester, UL 94V-0 Standard
- Standard : Nylon-6T
- Finish: Tin, Gold or Duplex Plated
- Standard: Gold Flash all over
- Note:
Duplex plating: Gold Plated on contact area,
Tin on solder area

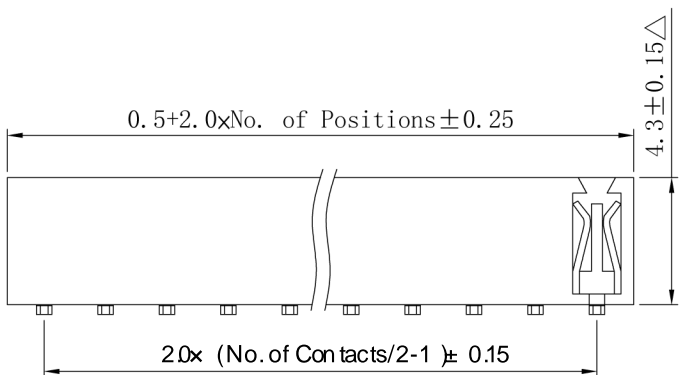

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F401	X	X	X	DXXX	-XX
(Female Header Dual Row) F401 (2.00 H:4.3)	M: SMT Type	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold ©Duplex Plating D: Gold Flash/Tin (Standard: G)	N: Nylon-6T (Standard: N)	M-D D060 (Standard: M-D060)	(04 TO 80 Contacts)

所有材料為
 "環保材料"
 2006.11.10
 RoHS

△ 此符號表示重點管控尺寸

	DESCRIPTION(內容): 2.0mm Female Header H:4.3 W:4.2 SMT Nylon-6T	DRAWN(製圖): 劉建平	GENERAL TOLERANCE: (公差)	REV: R1	REV	DESCRIPTION	DATE
		CHECKED(確認):	.X .XX .XXX	UNIT: mm	R0	舊料號: GPFB302 X05 舊料號: F401-MGN-D060	2005.08.13 2006.01.18
	PART NO: (料號) F401-MGN-D060-XX	APPROVAL(核准):	SCALE(比例): 1:XX	SIZE: A4	R1	更新料號	2006.06.07
	DWG NO(圖號):			SHEET: 1/1	R2		
				R3			