
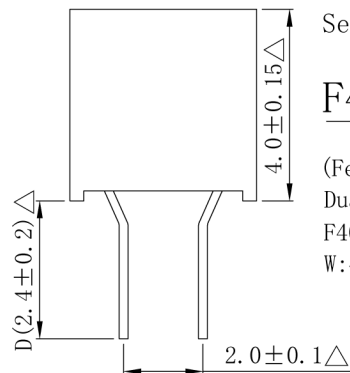


P. C. B. Hole Layout

Specifications

Current Rating : 2 Amp
 Insulator Resistance : 3000 Megohms Min.
 Contact Resistance : 20 m ohms max.
 Dielectric Withstanding : AC 500 V
 Operating Temperature : -40°C ~ +105°C
 Contact Material : Phosphor Bronze.
 Insulator Material : Polyester, UL 94V-0
 Finish: Tin, Gold or Duplex Plated
 Standard: Gold Flash all over
 Note:
 Duplex plating: Gold Plated on contact area,
 Tin on solder area

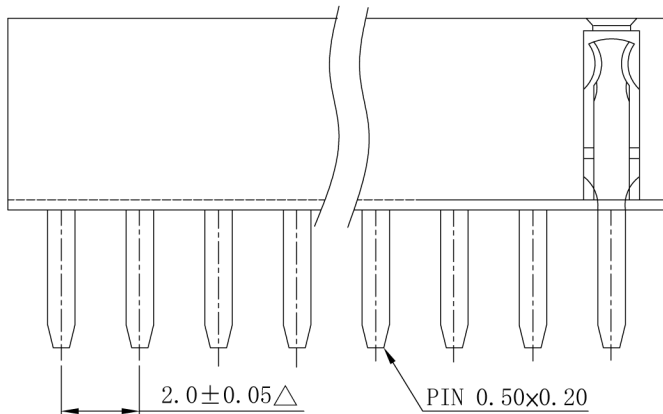

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F402	X	X	X	DXXX	XX
(Female Header Dual Row) F402 (2.00 H:4.0 W:4.0)	S: Straight Type	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold E: 1.5U"Gold ©Duplex Plating D: Gold Flash/Tin (Standard:G)	P: PBT N: Nylon-6T (Standard:N)	S-D D024 (Standard:S-D024)	(04 TO 80 Contacts)

所有材料為
"環保材料"
2007.5.23
RoHS

△ 此符號表示重點管控尺寸

DESCRIPTION(內容): 2.0mmFemale Header 180° H:4.0 W:4.0	DRAWN(製圖): Kevin	GENERAL TOLERANCE:(公差)	REV: R0	REV	DESCRIPTION	DATE	
	CHECKED(確認): Mandy	.X .XXX .XX .X° .XXX .XX°	UNIT: mm	R0		2007.05.23	
	PART NO: (料號) F402-SG_-D024-XX	APPROVAL(核准): Johnny	SCALE(比例): 1:XX	SIZE: A4	R1		
	DWG NO(圖號):			SHEET: 1/1	R2 R3		