

A

B



C

D

E

1

1

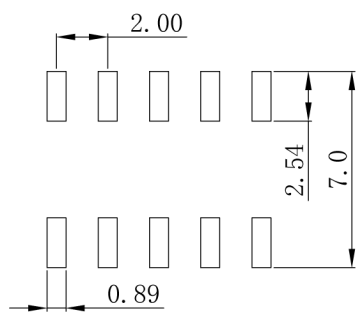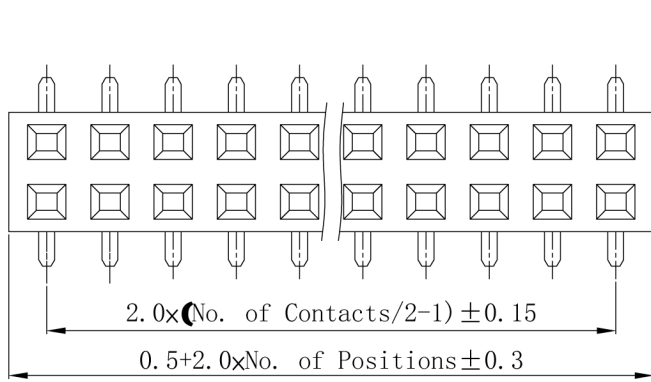



P.C.B. Hole Layout

Specifications

- Current Rating : 2 Amp
- Insulator Resistance : 3000 Megohms Min.
- Contact Resistance : 20 m ohms max.
- Dielectric Withstanding : AC 500 V
- Operating Temperature : -40°C ~ +105°C
- Max Processing Temp : 260°C for 3 ~ 5 sec Max.
- Contact Material : Phosphor Bronze.
- Insulator Material : Polyester, UL 94V-0
- Standard : Nylon-6T
- Finish: Tin, Gold or Duplex Plated
- Standard: Gold Flash all over
- Note:
Duplex plating: Gold Plated on contact area,
Tin on solder area

2

2

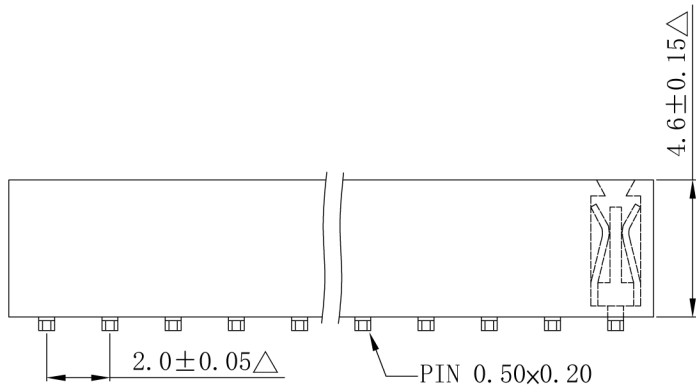

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F403 (Female Header Dual Row) F403 (2.00 H: 4.6)	X M: SMT Type	X	X N: Nylon-6T (Standard: N)	DXXX M-D D060 (Standard: M-D060)	-XX (04 TO 80 Contacts)

G: Gold Flash
 T: Tin Plated
 A: 10U"Gold
 B: 15U"Gold
 C: 20U"Gold
 ©Duplex Plating
 D: Gold Flash/Tin (Standard: G)

所有材料為
環保材料
2006.11.24
RoHS

△ 此符號表示重點管控尺寸

3

3

DESCRIPTION(內容): 2.00mm Female Header H:4.6 W:4.0 SMT Nylon-6T	DRAWN(製圖): 劉建平	GENERAL TOLERANCE: (公差)	REV: R1	REV	DESCRIPTION	DATE
	CHECKED(確認):	.X .XX .XXX	.XXXX .X° .XX°	UNIT: mm	R0	舊料號: C08B402XS 舊料號: F403-MGN-D060
PART NO: (料號) F403-MGN-D060-XX	APPROVAL(核准):	SCALE(比例): 1:XX	SIZE: A4	R1	更新料號	2006.06.07
DWG NO(圖號):			SHEET: 1/1	R2		
				R3		

A

B

C

D

E