



A

B

C

D

E

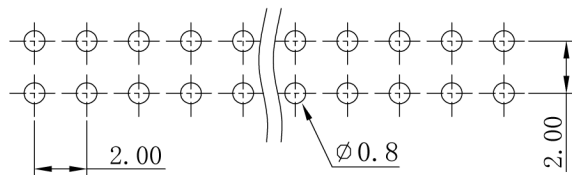
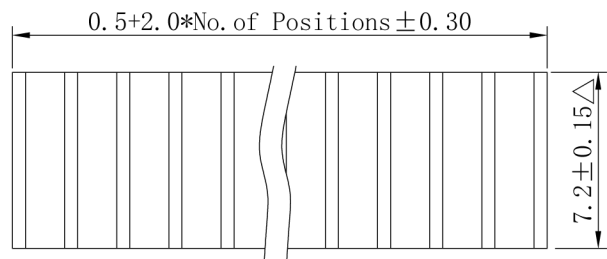


P.C.B. Hole Layout

Specifications

Current Rating	:2 Amp
Insulator Resistance	:3000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 500 V
Operating Temperature	:-40°C ~ +105°C
Contact Material	:Phosphor Bronze.
Insulator Material	:Polyester, UL 94V-0

Standard :Nylon-6T
 Finish: Tin, Gold or Duplex Plated
 Standard: Gold Flash all over
 Note:
 Duplex plating: Gold Plated on contact area,
 Tin on solder area

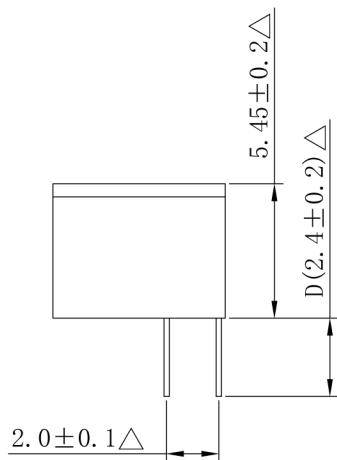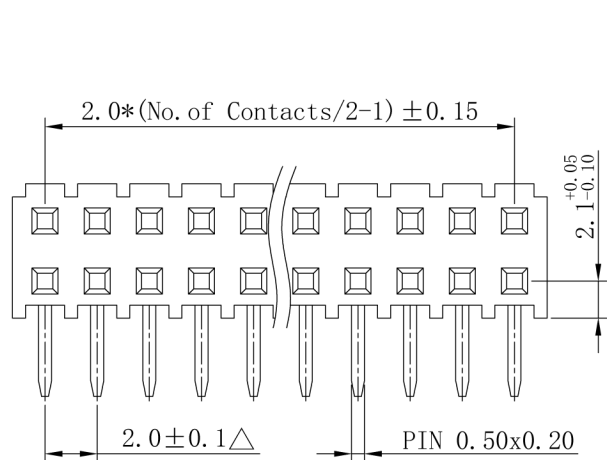

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
<u>F407</u>	- <u>X</u>	<u>X</u>	<u>X</u>	- <u>DXXX</u>	- <u>XX</u>
(Female Header Dual row F407 (2.00 H:7.2 W:5.45)	R:Right Angle	G:Gold Flash T:Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ©Duplex Plating D:Gold Flash/Tin (Standard:G)	N:Nylon-6T (Standard:N)	R-D D024 (Standard:S-D024)	(04 TO 80 Contacts)

所有材料為
"環保材料"
2007.7.17
RoHS

△ 此符號表示重點管控尺寸

	DESCRIPTION(內容): 2.0mm Female Header H:7.2 W:5.45 90° Nylon-6T 波浪型	DRAWN(製圖): 劉建平	GENERAL TOLERANCE: (公差)	REV: R0	REV	DESCRIPTION	DATE	
	PART NO: (料號) F407-RGN-D024-XX	CHECKED(確認): 師會營	.X .XX .XXX	.XXXX .X° .XX°	UNIT: mm	R0	2007.02.26	
	DWG NO(圖號):	APPROVAL(核准):	SCALE(比例): 1:XX	⊕	SIZE: A4	R1		
					SHEET: 1/1	R2		
					R3			

A

B

C

D

E