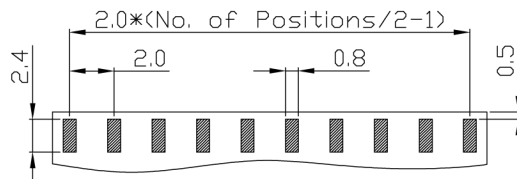
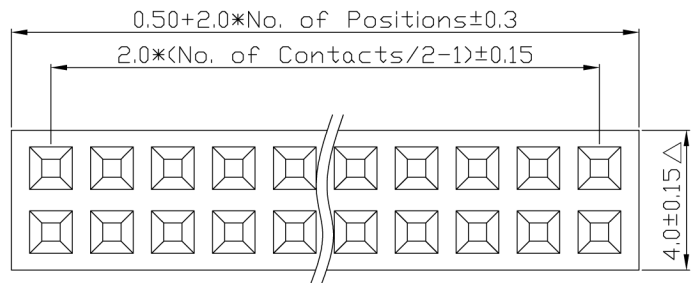


A**B****C****D****E**

P.C.B. Layout
(BOTH SIDES)

Specifications



Current Rating	: 2 Amp
Insulator Resistance	: 3000 Megohms Min.
Contact Resistance	: 20 m ohms max.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: -40°C ~ +105°C
Contact Material	: Phosphor Bronze.
Insulator Material	: Polyester, UL 94V-0
Finish	: Tin, Gold or Duplex Plated
Standard	: Gold Flash all over
Note:	
Duplex plating	: Gold Plated on contact area, Tin on solder area

1

1

2

2

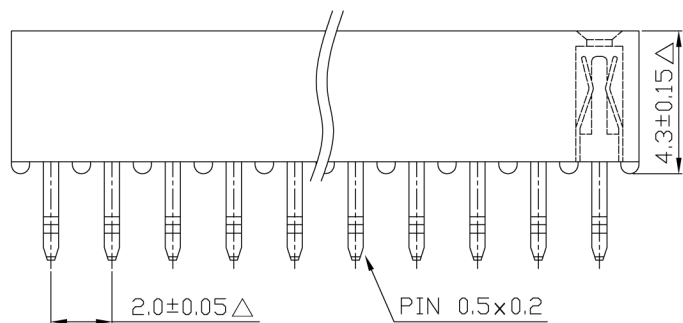

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
<u>F491</u>	- <u>X</u>	<u>X</u>	<u>X</u>	- <u>DXXX</u>	- <u>XX</u>
(Female Header Dual Row) F491 (2.00 H:4.3 W:4.0 With stand off)	K: "K" Type K: 0.9 mm	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold ©Duplex Plating D: Gold Flash/Tin (Standard:G)	A: PA46 N: Nylon-6T (Standard:N)	K-D D024 (Standard:K-D024)	(04 TO 80 Contacts)

所有材料為
「環保材料」
2006.2.15
RoHS

△ 符號表示重點管控尺寸

3

3

DESCRIPTION(內容):	DRAWN(製圖):	GENERAL TOLERANCE:	REV:	REV	DESCRIPTION	DATE
	劉兵	(公差)	R3			
2.0mm Female Header 夾板式 H:4.3 W:4.0	CHECKED(確認):	.X .XX .XXX	.XXXX .X° .XX°	UNIT:	舊料號: CFB4302 2MM-K	2005.08.13
	PART NO: (料號):	APPROVAL(核准):	SCALE(比例):	mm	舊料號: CFB4302 2MM-K	2006.07.18
DWG NO(圖號):		1:XX	①	R1	更新料號	2006.07.31
				A4 SHEET:	變更環保章字樣	2006.08.16
				1/1	修改 Layout	2007.03.13

A**B****C****D****E**