
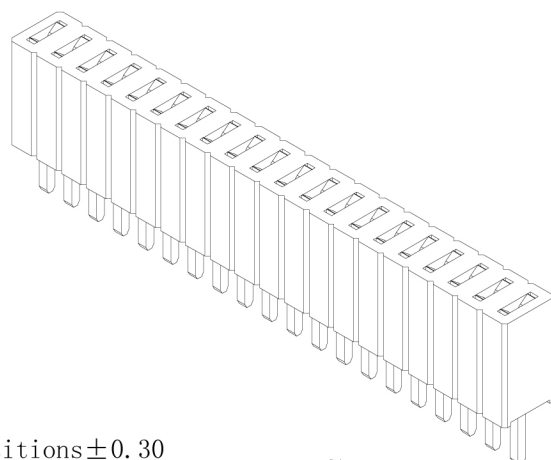
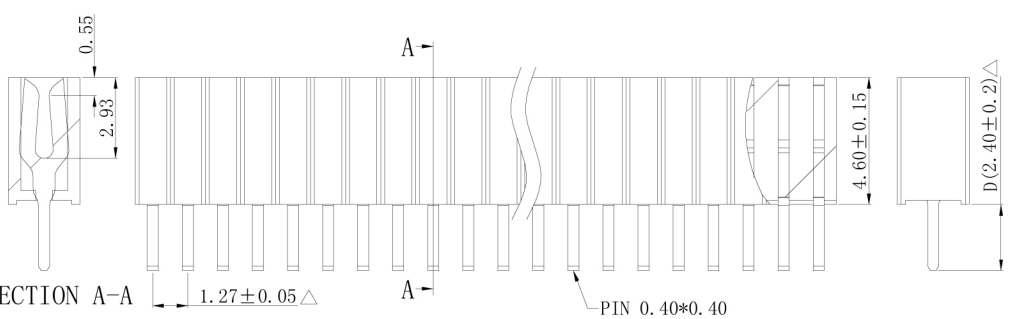



A**B****C****D****E**

Specifications

Current Rating	: 1 Amp
Insulator Resistance	: 1000 Megohms Min.
Contact Resistance	: 20 m ohms max.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: -40 °C ~ +105°C
Contact Material	: Brass
Insulator Material	: Polyester, UL 94V-0
Standard	: Nylon-6T
Finish	: Gold Plated
Standard	: Gold Flash all over

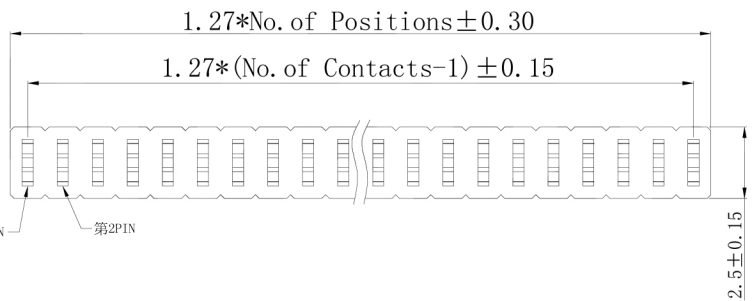

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F501	X	X	X	DXXX	-XX
(Female Header Single Row) F501 (1.27 H:4.6)	S: Straight Type	G: Gold Flash T: Tin Plated A: 10U ² Gold B: 15U ² Gold C: 20U ² Gold © Duplex Plating D: Gold Flash/Tin (Standard: G)	N: Nylon-6T A: PA-46 (Standard: N)	S-D D024 (Standard: S-D024)	(02 TO 40 Contacts)

所有材料為
"環保材料"
2014.4.21
RoHS

DESCRIPTION(內容): 1.27mm Female Header 180° H:4.6 W:2.5 Nylon-6T 波浪型 PART NO: (料號) F501-SGN-D024-XX DWG NO(圖號):	DRAWN(製圖): 鄧文广	GENERAL TOLERANCE (公差): .X .XXX .XX .X° .XXX .XX°	REV: A/6 UNIT: mm SIZE: A4 SHEET: 1/1	REV: 1 2 3 4 6	DESCRIPTION △ 此符號表示重點管控尺寸 舊料號: CCPBC460S01xXX 舊料號: F501-XXSGN-D024 錫腳規格更改為: 0.40*0.40 塑膠長度公差改為"±0.30"	DATE 2005.08.13 2005.12.04 2006.06.05 2006.08.07 2014.09.01
	APPROVAL(核准):	SCALE(比例): 1:XX				

A**B****C****D****E**