

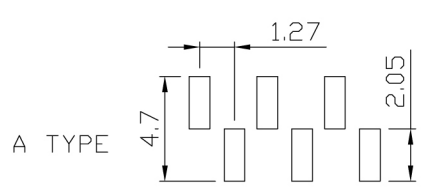
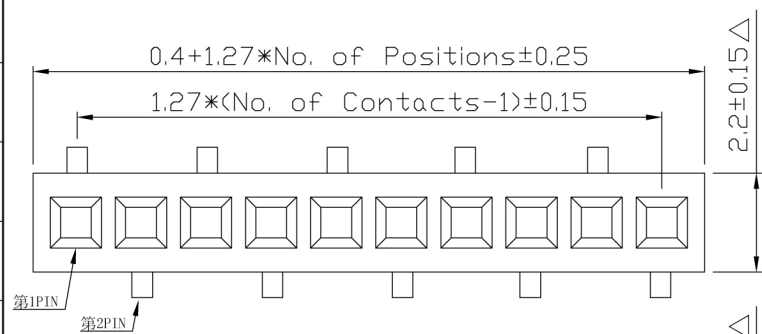




1

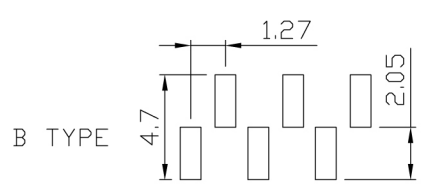

2

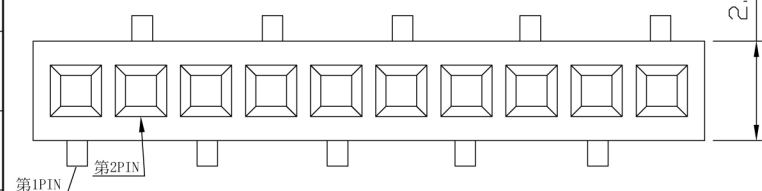

3

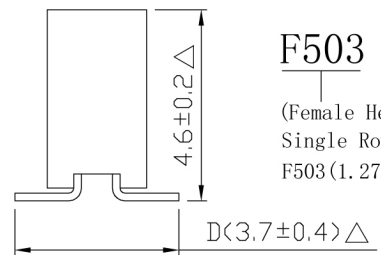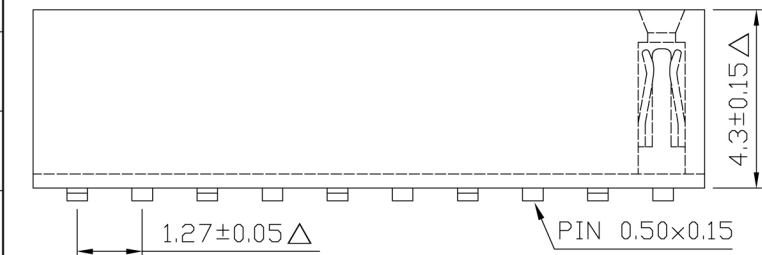

Specifications

Current Rating	:1 Amp
Insulator Resistance	:1000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 500 V
Operating Temperature	:-40°C ~ +105°C
Max Processing Temp	:260°C for 3 ~ 5 sec Max.
Contact Material	:Phosphor Bronze
Insulator Material	:Polyester, UL 94V-0
Standard	:Nylon-6T
Finish	:Gold Plated
Standard	:Gold Flash all over

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts	Other
F503	- X	X	X	- DXXX	- XX	- XT
(Female Header Single Row) F503(1.27 H:4.3)	M:SMT Type	G:Gold Flash T: Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ©Duplex Plating D:Gold Flash/Tin (Standard:G)	N:Nylon-6T (Standard:N)	M-D D037 (Standard:M-D032)	(02 TO 40 Contacts)	AT:TYPE A BT:TYPE B

所有材料為
•環保材料•
.....
RoHS

△●此符號表示重點管控尺寸

DESCRIPTION(內容) 1.27mm Female Header H:4.3 W:2.2 SMT Nylon-6T	DRAWN(製圖) 黃玉美	GENERAL TOLERANCE: (公差)	REV: R1	REV	DESCRIPTION	DATE	
	CHECKED(確認)	.X .XX .XXX	.XXXX .X° .XX°	UNIT: mm	R0 舊料號.....更新料號	2005.08.13 2006.06.20	
	PART NO: (料號) F503-MGN-D037-XX-XT	APPROVAL(核准)	SCALE(比例): 1:XX	SIZE: A4	R1 端子尺寸.....x.....變更為.....x.....	2008.11.17	
	DWG NO(圖號):			SHEET: 1/1	R2		
				R3			