
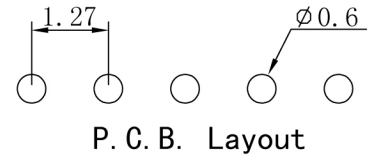



1

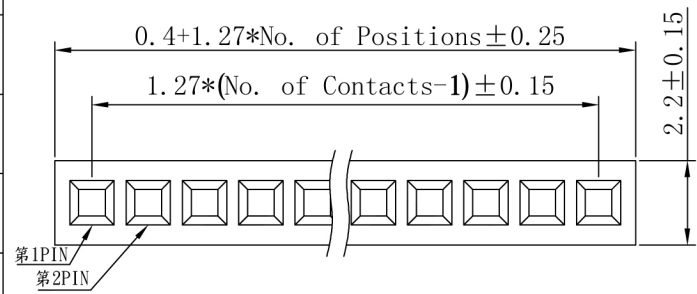

Specifications

Current Rating	:1 Amp
Insulator Resistance	:1000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 500 V
Operating Temperature	:-40°C ~ +105°C
Contact Material	:Phosphor Bronze
Insulator Material	:Polyester, UL 94V-0
Standard	:Nylon-6T
Finish	:Gold Plated
Standard	:Gold Flash all over

2

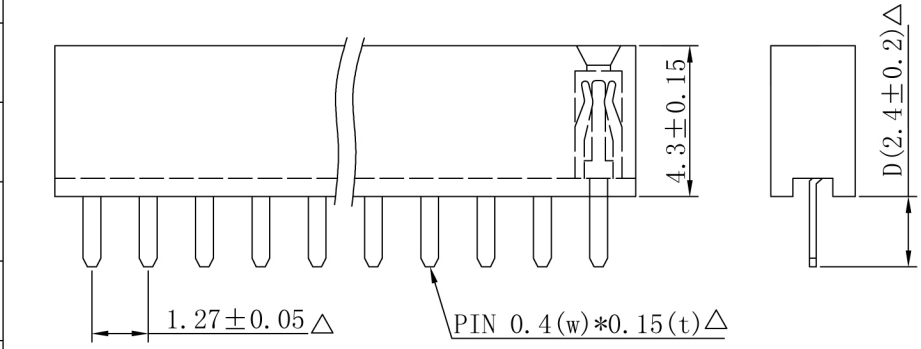

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F503	X	X	X	DXXX	-XX
(Female Header Single Row) F503(1.27 H:4.3 W:2.2)	S: Straight Type	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold ◎Duplex Plating D: Gold Flash/Tin (Standard:G)	N: Nylon-6T C: LCP (Standard:N)	S-D D024 (Standard:S-D024)	(02 TO 40 Contacts)

所有材料為
 "環保材料"
 2007.4.02
 RoHS

3

DESCRIPTION(內容): 1.27mm Female Header 180° H:4.3 W:2.2 NL-6T PART NO: (料號) F503-SGN-D024-XX DWG NO(圖號):	DRAWN(製圖): 黃炳秋	GENERAL TOLERANCE: (公差) .X .XX .XXX	REV: A/4 UNIT: mm SIZE: A4 SHEET: 1/1	REV 1 2 3 4	DESCRIPTION △此符號表示重點管控尺寸 旧料号: CCPBC430S01xXX-2.4 旧料号: F503-XXSGN-D024 端子脚宽度变更为0.40	DATE 2005.08.13 2005.12.04 2006.06.08 2014.09.18
	CHECKED(確認):	SCALE(比例): 1:XX				
	APPROVAL(核准):					