
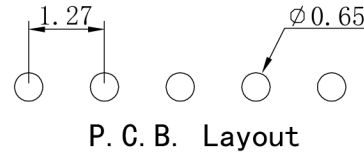
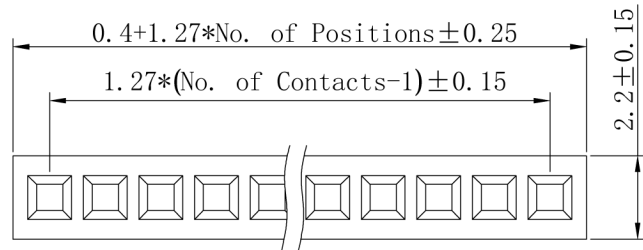



**A****B****C****D****E**

## Specifications

Current Rating	: 1 Amp
Insulator Resistance	: 1000 Megohms Min.
Contact Resistance	: 20 m ohms max.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: -40 °C ~ +105 °C
Contact Material	: Phosphor Bronze
Insulator Material	: Polyester, UL 94V-0
Standard	: Nylon-6T
Finish	: Gold Plated
Standard	: Gold Flash all over

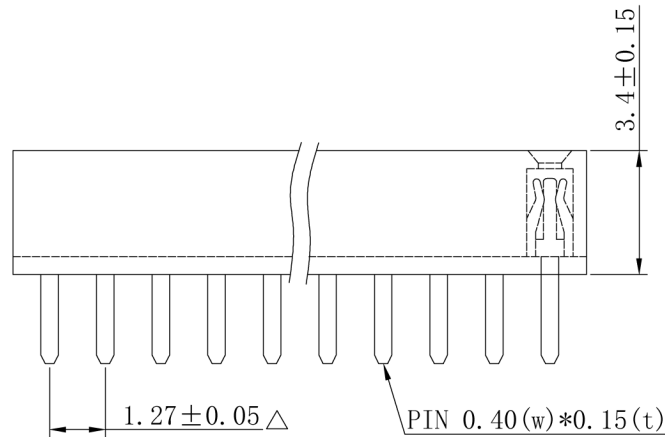

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F504	X	X	X	DXXX	-XX
(Female Header Single series) F504 (1.27 H:3.4)	S: Straight Type	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold ©Duplex Plating D: Gold Flash/Tin (Standard:G)	N: Nylon-6T (Standard:N)	S-D D024 (Standard:S-D024)	(02 TO 40 Contacts)

所有材料為  
環保材料  
2007.1.03  
RoHS

PART NO: (料號) <b>F504-SGN-D024-XX</b> DWG NO(圖號):	DESCRIPTION(內容): <b>1.27mm Female Header 180° H:3.4 W:2.2 Nylon-6T</b>	DRAWN(製圖): 黃炳秋	GENERAL TOLERANCE: (公差)	REV: <b>A/4</b>	REV	DESCRIPTION	DATE
		CHECKED(確認):	.X .XXXX .XX .X ° .XXX .XX °	UNIT: <b>mm</b>	<b>1</b>	△此符號表示重點管控尺寸	<b>2005.08.13</b>
		APPROVAL(核准):	SCALE(比例): 1:XX	SIZE: <b>A4</b>	<b>2</b>	舊料號: CCPBC340S01×XX	<b>2005.12.04</b>
				SHEET: <b>1/1</b>	<b>3</b>	舊料號: <b>F504-XXSGN-D024</b>	<b>2006.06.08</b>
					<b>4</b>	修改端子腳寬度 <b>040</b>	<b>2014.10.27</b>

**A****B****C****D****E**

FILE NO: CWJ-4E-09