



P.C.B Hole Layout

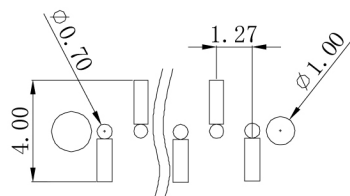



B TYPE

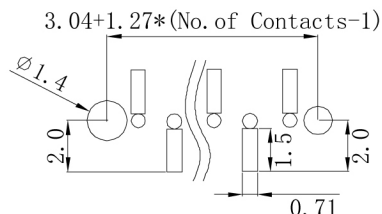



A TYPE

Specifications

Current Rating	: 1 Amp
Insulator Resistance	: 1000 Megohms Min.
Contact Resistance	: 20 m ohms max.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: -40 °C ~ +105 °C
Soldering Temperature	: 260 °C for 3~5sec Max.
Contact Material	: Phosphor Bronze
Insulator Material	: Polyester, UL 94V-0
Standard	: Nylon-6T
Finish	: Gold Plated
Standard	: Gold Flash all over

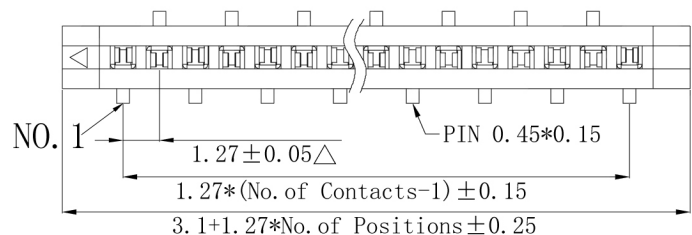

剖面圖 A-A

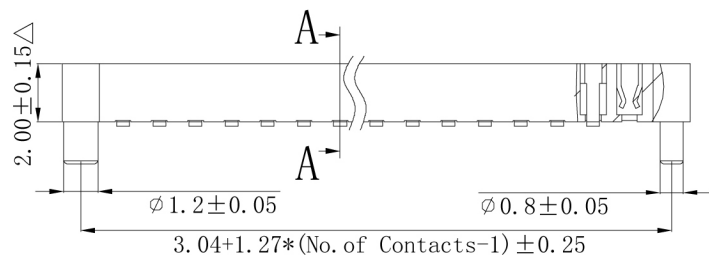

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts	Other
F507	X	X	X - DXXX	XX	XT	
(Female Header Single Row) F507 (1.27 H:2.0 塑膠兩側帶外柱)	M: SMT Type	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold ©Duplex Plating D: Gold Flash/Tin (Standard: G)	N: Nylon-6T (Standard: N)	M-D D030	(04 TO 40 Contacts)	AT: A TYPE BT: B TYPE

所有材料為
"環保材料"
2008.10.21
RoHS

△ 此符號表示重點管控尺寸

DESCRIPTION (內容): 1.27mm Female Header H:2.0 SMT Nylon-6T, 帶外柱 PART NO: (料號) F507-MGN-D030-XX-XT DWG NO(圖號):	DRAWN(製圖): KAY	GENERAL TOLERANCE: (公差)	REV: A/2	REV	DESCRIPTION	DATE	
	CHECKED(確認): MANDY	.X .XX .XXX	.XXXX .X ° .XX °	UNIT: mm	1	補充 LAOT 尺寸	2006.09.27 2012.04.24
	APPROVAL(核准): JOHNNY	SCALE(比例): XX:XX		SIZE: A4	3		
				SHEET: 1/1	4		