



A

B

C

D



E

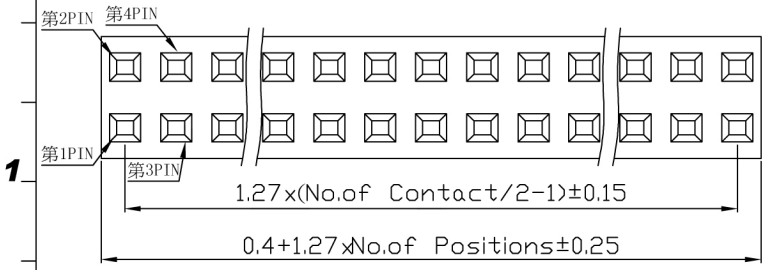

P.C.B Layout

### Specifications

Current Rating	: 1 Amp
Insulator Resistance	: 1000 Megohms Min.
Contact Resistance	: 20 m ohms max.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: -40°C ~ +105°C
Contact Material	: Phosphor Bronze
Insulator Material	: Polyester, UL 94V-0
Standard	: Nylon-6T
Finish	: Gold Plated
Standard	: Gold Flash all over

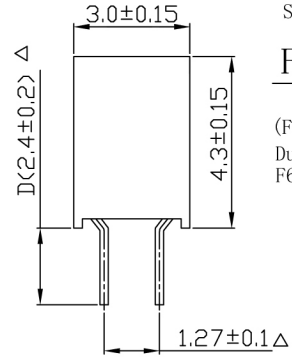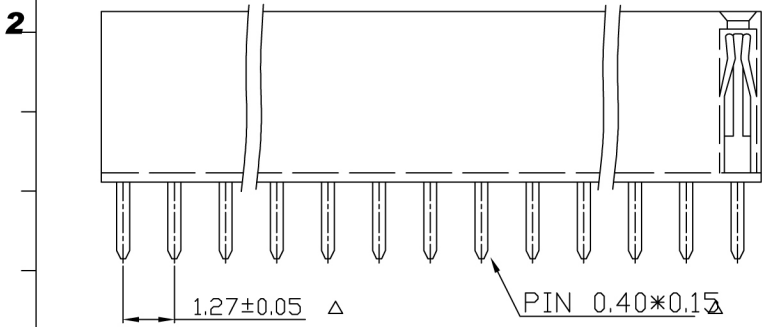

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F603	X	X	X	DXXX	-XX
(Female Header Dual Row) F603 (1.27 H:4.3)	S: Straight Type	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold ©Duplex Plating D: Gold Flash/Tin (Standard:G)	N: Nylon-6T (Standard:N)	S-D D024 (Standard:S-D024)	(04 TO 80 Contacts)

所有材料為  
"環保材料"  
2006.10.19  
RoHS

DESCRIPTION(內容): <b>1.27mm Female Header H:4.3 W:3.0 180° Nylon-6T</b>  PART NO: (料號) <b>F603-SGN-D024-XX</b>  DWG NO(圖號):	DRAWN(製圖): 黃炳秋	GENERAL TOLERANCE: (公差)	REV: <b>A/4</b>	REV	DESCRIPTION	DATE	
	CHECKED(確認):	.X .XX .XXX	.XXXX .X° .XX°	UNIT: <b>mm</b>	<b>1</b>	△此符號表示重點管控尺寸	<b>2005.08.13</b>
	APPROVAL(核准):	SCALE(比例): 1:XX		SIZE: <b>A4</b>	<b>2</b>	舊料號: CCPBC430S02×XX-2.4	<b>2005.12.04</b>
				SHEET: <b>1/1</b>	<b>3</b>	舊料號: F603-XXSGN-D24	<b>2006.06.08</b>
				<b>4</b>	端子脚宽度变更为0.40	<b>2014.09.18</b>	

A

B

C

D

E