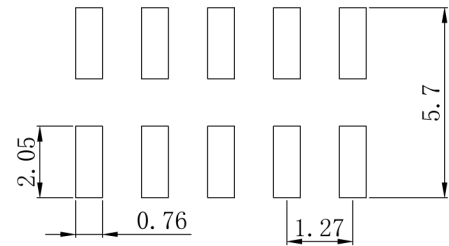
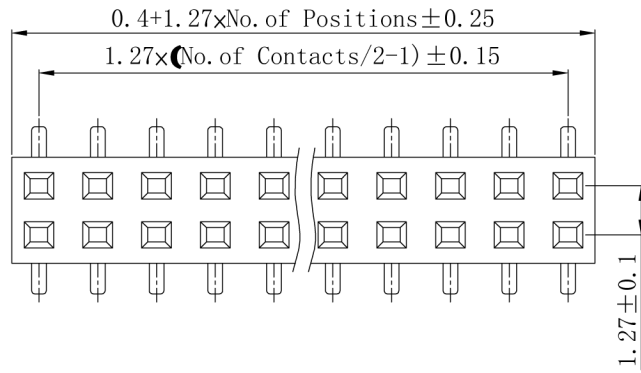

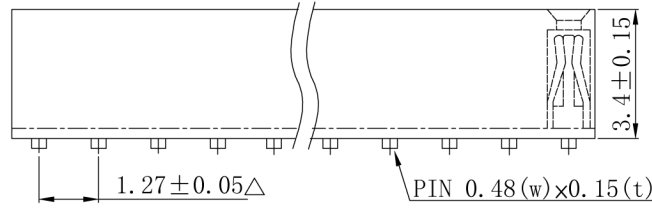


A**B****C****D****E**

Specifications

Current Rating	: 1 Amp
Insulator Resistance	: 1000 Megohms Min.
Contact Resistance	: 20 m ohms max.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: -40°C ~ +105°C
Soldering Temperature	: 260°C for 3~5sec Max.
Contact Material	: Phosphor Bronze
Insulator Material	: Polyester, UL 94V-0
Standard	: Nylon-6T
Finish	: Gold Plated
Standard	: Gold Flash all over

**P.C. Board Hole Layout**

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F604	X	X	X	DXXX	-XX
(Female Header Dual Row) F604 (1.27 H:3.4)	M: SMT Type	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold ©Duplex Plating D: Gold Flash/Tin (Standard:G)	N: Nylon-6T (Standard:N)	M-D D047	(04 TO 80 Contacts)

所有材料為
"環保材料"
2014.11.27
RoHS

PART NO: (料號) F604-MGN-D047-XX DWG NO(圖號):	DESCRIPTION(內容): 1.27mm Female Header H:3.4 W:3.0 SMT Nylon-6T(環保材料)	DRAWN(製圖): 劉建平	GENERAL TOLERANCE: (公差)	REV: A/2	REV	DESCRIPTION	DATE
		CHECKED(確認):	.X .XXX .XX .X° .XXX .XX°	UNIT: mm	1	△此符號表示重點管控尺寸	2007.03.11
		APPROVAL(核准):	SCALE(比例): XX:XX	SIZE: A4	2	PIN0.50(w)*0.15(t) 改為0.48(w)*0.15(t)	2007.10.29
				SHEET: 1/1	3		
					4		

A**B****C****D****E**