

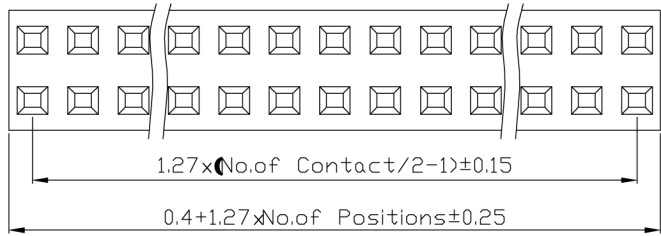



A**B****C****D****E**

P. C. B Layout

Specifications

Current Rating	:1 Amp
Insulator Resistance	:1000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 500 V
Operating Temperature	:-40 °C ~ +105°C
Contact Material	:Phosphor Bronze
Insulator Material	:Polyester, UL 94V-0
Standard	:Nylon-6T
Finish	:Gold Plated
Standard	:Gold Flash all over

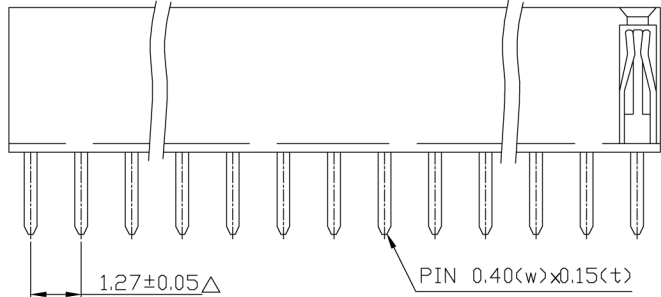

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F604	-	X	X	- DXXX	- XX
(Female Header Dual Row) F604(1.27 H:3.4)	S: Straight Type	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold ©Duplex Plating D: Gold Flash/Tin (Standard:G)	N: Nylon-6T (Standard:N)	S-D D024 (Standard:S-D024)	(04 TO 80 Contacts)

所有材料為
環保材料

2006. 5. 4

RoHS

DESCRIPTION(內容): 1.27mm Female Header H:3.4 W:3.0 180° Nylon-6T	DRAWN(製圖): 黃炳秋	GENERAL TOLERANCE:(公差)	REV: A/4	REV	DESCRIPTION	DATE	
	CHECKED(確認):	.X .XXXX .XX .X° .XXX .XX°	UNIT: mm	1	△此符號表示重點管控尺寸	2006.05.04	
	PART NO:(料號) F604-SGN-D024-XX	APPROVAL(核准):	SCALE(比例): 1:XX	SIZE: A4	2	舊料號: F604 XSGN D024	2007.02.02
	DWG NO(圖號):			SHEET: 1/1	3	修改端子脚寬度 04D	2014.10.27

A**B****C****D****E**