

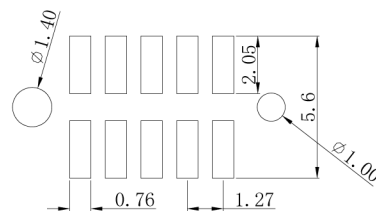
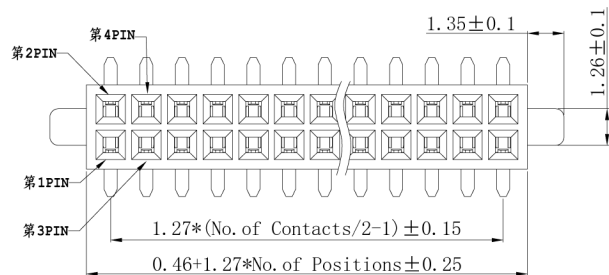



## Specifications

Current Rating	:1 Amp
Insulator Resistance	:1000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 500 V
Operating Temperature	:-40°C ~ +105°C
Soldering Temperature	:260°C for 3~5sec Max.
Contact Material	:Phosphor Bronze
Insulator Material	:Polyester, UL 94V-0
Standard	:Nylon-6T
Finish	:Gold Plated
Standard	:Gold Flash all over

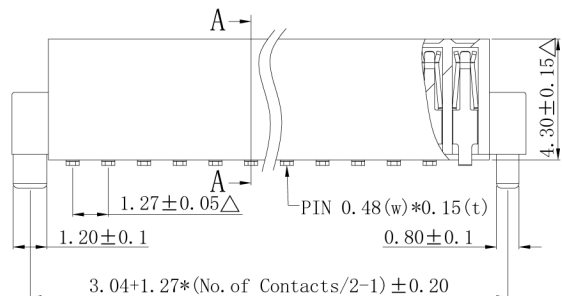

P. C. B Layout



Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F607	X	X	X	DXXX	XX
(Female Header Dual Row)	M:SMT Type	G:Gold Flash T:Tin Plated	N:Nylon-6T (Standard:N)	M-D D048	(06 TO 80 Contacts)
F607 (1.27 H:4.3 W:3.0 側面帶大小柱)		A:10U"Gold B:15U"Gold C:20U"Gold ©Duplex Plating D:Gold Flash/Tin (Standard:G)		(Standard:M-D045)	

所有材料為  
"環保材料"  
2006.7.11  
RoHS

DESCRIPTION(內容): <b>1.27mm Female Header H:4.3 W:3.0 SMT Nylon-6T, 側面帶大小柱</b>	DRAWN(製圖): 黃玉美	GENERAL TOLERANCE: (公差)	REV: <b>R2</b>	REV	DESCRIPTION	DATE	
	CHECKED(確認):	.X .XX .XXX	.XXXX .X° .XX°	UNIT: <b>mm</b>	<b>R0</b>	舊料號:CCPB4.25C4.8M-2×XXXS,更新料號	
	PART NO: (料號) <b>F607-MGN-D048-XX</b>	APPROVAL(核准):	SCALE(比例): 1:XX	SIZE: <b>A4</b>	<b>R1</b>	變更環保章字樣	<b>2006.08.16</b>
	DWG NO(圖號):			SHEET: <b>1/1</b>	<b>R2</b>	變更視圖視角&柱子與塑膠到針底尺寸	<b>2006.11.23</b>
				<b>R3</b>			