
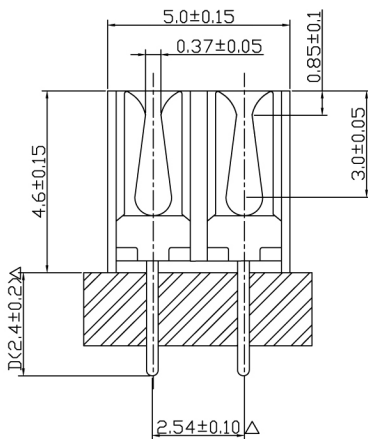


P.C.B Hole Layout

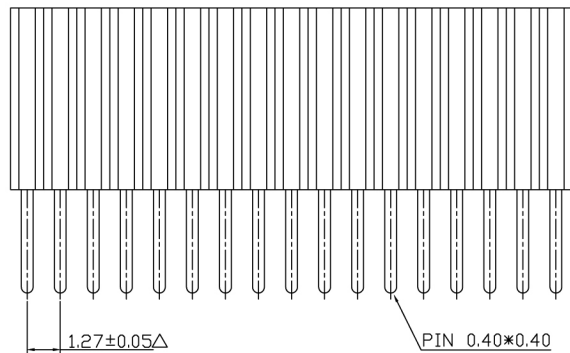

### Specifications

Current Rating	: 1 Amp
Insulator Resistance	: 1000 Megohms Min.
Contact Resistance	: 20 m ohms max.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: -40°C ~ +105°C
Contact Material	: Phosphor Bronze
Insulator Material	: Polyester, UL 94V-0
Standard	: Nylon-6T
Finish	: Gold Plated
Standard	: Gold Flash all over

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
<b>F609</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>DXXX</b>	<b>-XX</b>
(Female Header Dual Row) F609 (1.27*2.54 H:4.6 W:5.0)	S: Straight Type	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold ©Duplex Plating D: Gold Flash/Tin (Standard:G)	N: Nylon-6T (Standard:N)	S-D D024 (Standard:S-D024)	(04 TO 80 Contacts)

所有材料為  
"環保材料"  
2014.12.30  
RoHS

DESCRIPTION(內容): <b>1.27mm Female Header 180° H:4.6 W:5.0 波浪型 Nylon-6T</b> PART NO: (料號) <b>F609-SGN-D024-XX</b> DWG NO(圖號):	DRAWN(製圖): 劉兵	GENERAL TOLERANCE: (公差) X. ±0.30 X.° ±5.0° .X ±0.20 .X.° ±3.0° .XX ±0.15 .XX° ±1.0°	REV: <b>A/3</b> UNIT: <b>mm</b> SIZE: <b>A4</b> SHEET: <b>1/1</b>	REV <b>1</b> <b>2</b> <b>3</b> <b>4</b>	DESCRIPTION △此符號表示重點管控尺寸 舊料號: <b>CCPB460C127S02xXX</b> 舊料號: <b>F609-XXSGN-D24</b>	DATE <b>2005.08.13</b> <b>2006.02.16</b> <b>2006.06.07</b>
	CHECKED(確認): 黃炳秋	SCALE(比例): <b>1:XX</b>				
	APPROVAL(核准): 鄧文广					