




Recommended P.C.Board Hole Layout

Specifications

Current Rating	: 1 Amp
Insulator Resistance	: 1000 Megohms Min.
Contact Resistance	: 20 m ohms max.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: -40 °C ~ +105 °C
Soldering Temperature	: 260 °C for 3~5s Max.
Contact Material	: Phosphor Bronze
Insulator Material	: Polyester, UL 94V-0
Standard Finish	: Nylon-6T
Standard	: Gold Plated
	: Gold Flash all over



剖視圖 A-A

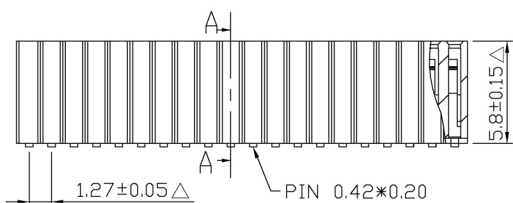

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F611	X	X	X	DXXX	XX
(Female Header Dual Row) F611 (1.27*2.54 H:5.8)	M: SMT Type	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold ©Duplex Plating	N: Nylon-6T (Standard: N)	M-D D067	(04 TO 80 Contacts)

所有材料為
"環保材料"
2012.8.16
RoHS

△ 此符號表示重點管控尺寸

DESCRIPTION(內容): 1.27mm Female Header H:5.8 SMT TYPE Nylon-6T	DRAWN(製圖): 王建平	GENERAL TOLERANCE: (公差)	REV: A/2	REV	DESCRIPTION	DATE	
	CHECKED(確認):	.X .XXXX .XX .X° .XXX .XX°	UNIT: mm	1		2009.10.16	
	PART NO: (料號) F611-MGN-D067-XX	APPROVAL(核准):	SCALE(比例): 1:XX	SIZE: A4	2	變更料号 长度 展开度	2012.08.15
	DWG NO(圖號):			SHEET: 1/1	3		
				4			