


Specifications

Current Rating	:1 Amp
Insulator Resistance	:1000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 500 V
Operating Temperature	:-40°C ~ +105°C
Max Processing Temp	:260°C for 3 ~ 5 sec Max.
Contact Material	:Phosphor Bronze
Insulator Material	:Polyester, UL 94V-0
Standard	:Nylon-6T
Finish	:Gold Plated
Standard	:Gold Flash all over

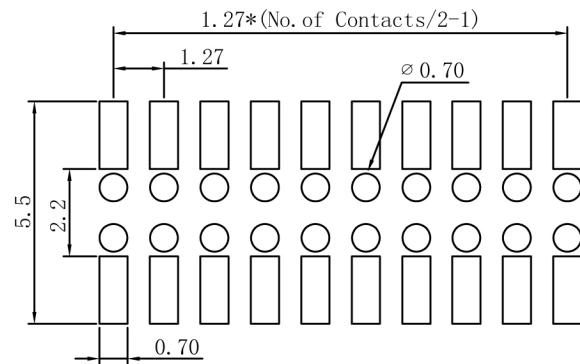

P. C. B Layout

△ 此符號表示重點管控尺寸

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F623	- X	X	X - DXXX	- XX	
(Female Header Dual Row) F623 (1.27 H:2.00 W:3.4)	M:SMT Type	G:Gold Flash T:Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ◎Duplex Plating D:Gold Flash/Tin (Standard:G)	N:Nylon-6T (Standard:N)	M-D D045	(04 TO 80 Contacts)

所有材料為
"環保材料"
2007.4.10
RoHS

DESCRIPTION(內容): 1.27mm Female Header H:2.00 W:3.4 SMT Nylon-6T	DRAWN(製圖): 劉建平	GENERAL TOLERANCE: (公差)	REV: R1	REV	DESCRIPTION	DATE
	CHECKED(確認): 師會營	.X .XX .XXX	.XXXX .X° .XX°	UNIT: mm	R0	舊料號: F623-MGN-D045-XX 更新料號 2007.01.09
	PART NO: (料號) F623-MGN-D045-XX	APPROVAL(核准):	SCALE(比例): 1:XX	SIZE: A4	R1	修正 Specifications 2008.02.12
	DWG NO(圖號):			SHEET: 1/1	R2 R3	