
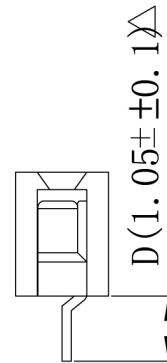


Specifications

Current Rating	: 0.8 Amp
Insulator Resistance	: 900 Megohms Min.
Contact Resistance	: 20 m ohms max.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: -40 °C ~ +105°C
Contact Material	: Phosphor Bronze
Insulator Material	: High Temperature Thermoplastic. UL 94V-0
Standard	: LCP
Finish	: Gold Plated
Standard	: Gold Flash all over

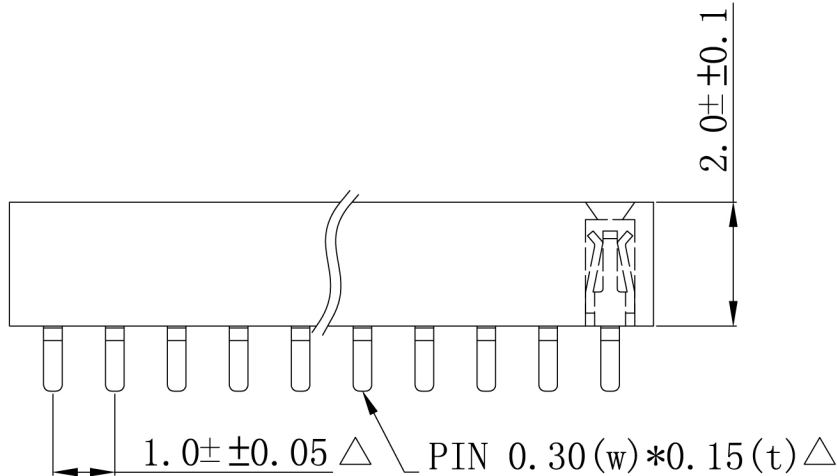

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F703	X	X	X	DXXX	-XX
(Female Header Dual Row) F703(1.00 H:2.0 W:1.5)	S: Straight Type	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold ©Duplex Plating D: Gold Flash/Tin (Standard:G)	C:LCP (Standard:C)	S-D D011	(02 TO 20 Contacts)

所有材料為
"環保材料"
2014.12.22
RoHS

DESCRIPTION(內容): 1.0mm Female Header 180° H:2.0 W:1.5 LCP PART NO: (料 號) F703-SGC-D011-XX DWG NO(圖號):	DRAWN(製圖): 黃炳秋	GENERAL TOLERANCE: (公差)	REV: A/1	REV	DESCRIPTION	DATE
	CHECKED(確認): 黃炳秋	X. ±0.30 X.° ±5.0° .X ±0.20 .X° ±3.0° .XX ±0.15 .XX° ±1.0°	UNIT: mm	1	△此符號表示重點管控尺寸	2014.12.11
	APPROVAL(核准): 鄧文廣	SCALE(比例): 1:1	SIZE: A4	2		
			SHEET: X/X	3		
			4			