

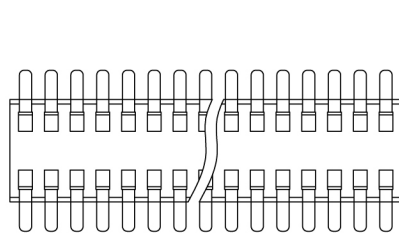
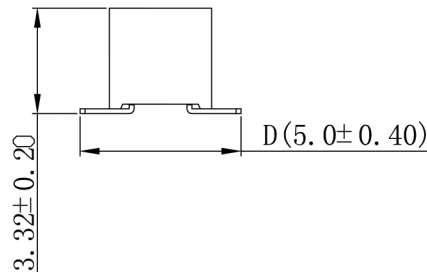
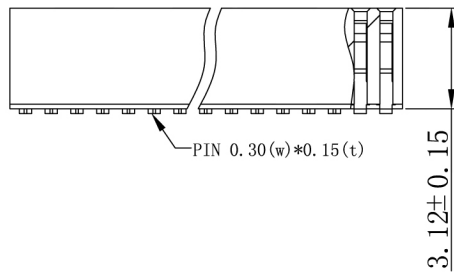


### Specifications

Current Rating	:0.8 Amp
Insulator Resistance	:800 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 500 V
Operating Temperature	:-40° C ~ +105°C
Soldering Temperature	:260° C for 3-5sec Max.
Contact Material	:Phosphor Bronze
Insulator Material	:High Temperature Thermoplastic.UL 94V-0
Standard	:LCP
Finish	:Gold Plated
Standard	:Gold Flash all over



Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
F901	X	X	X	DXXX	-XX
(Female Header Dual Row) F901(0.8 H:3.12 W:3.18)	M:SMT Type	G:Gold Flash T:Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ©Duplex Plating	C:LCP	M-D D050	(04 TO 80 Contacts)

所有材料為  
"環保材料"

2014.12.24

RoHS

△ 此符號表示重點管控尺寸

DESCRIPTION(內容): 0.8mm Female Header H:3.12 SMT LCP  PART NO: (料號) F901-MGC-D050-XX  DWG NO(圖號):	DRAWN(製圖): 黃炳秋	GENERAL TOLERANCE: (公差) X. ±0.30 X.° ±5.0° .X ±0.20 .X° ±3.0° .XX ±0.15 .XX° ±1.0°	REV: A/1	REV 1 2 3 4	DESCRIPTION	DATE 2014.12.10
	CHECKED(確認): 黃炳秋		SCALE(比例): XX:XX			
	APPROVAL(核准): 鄧文广		SIZE: A4			
			SHEET: X/X			