



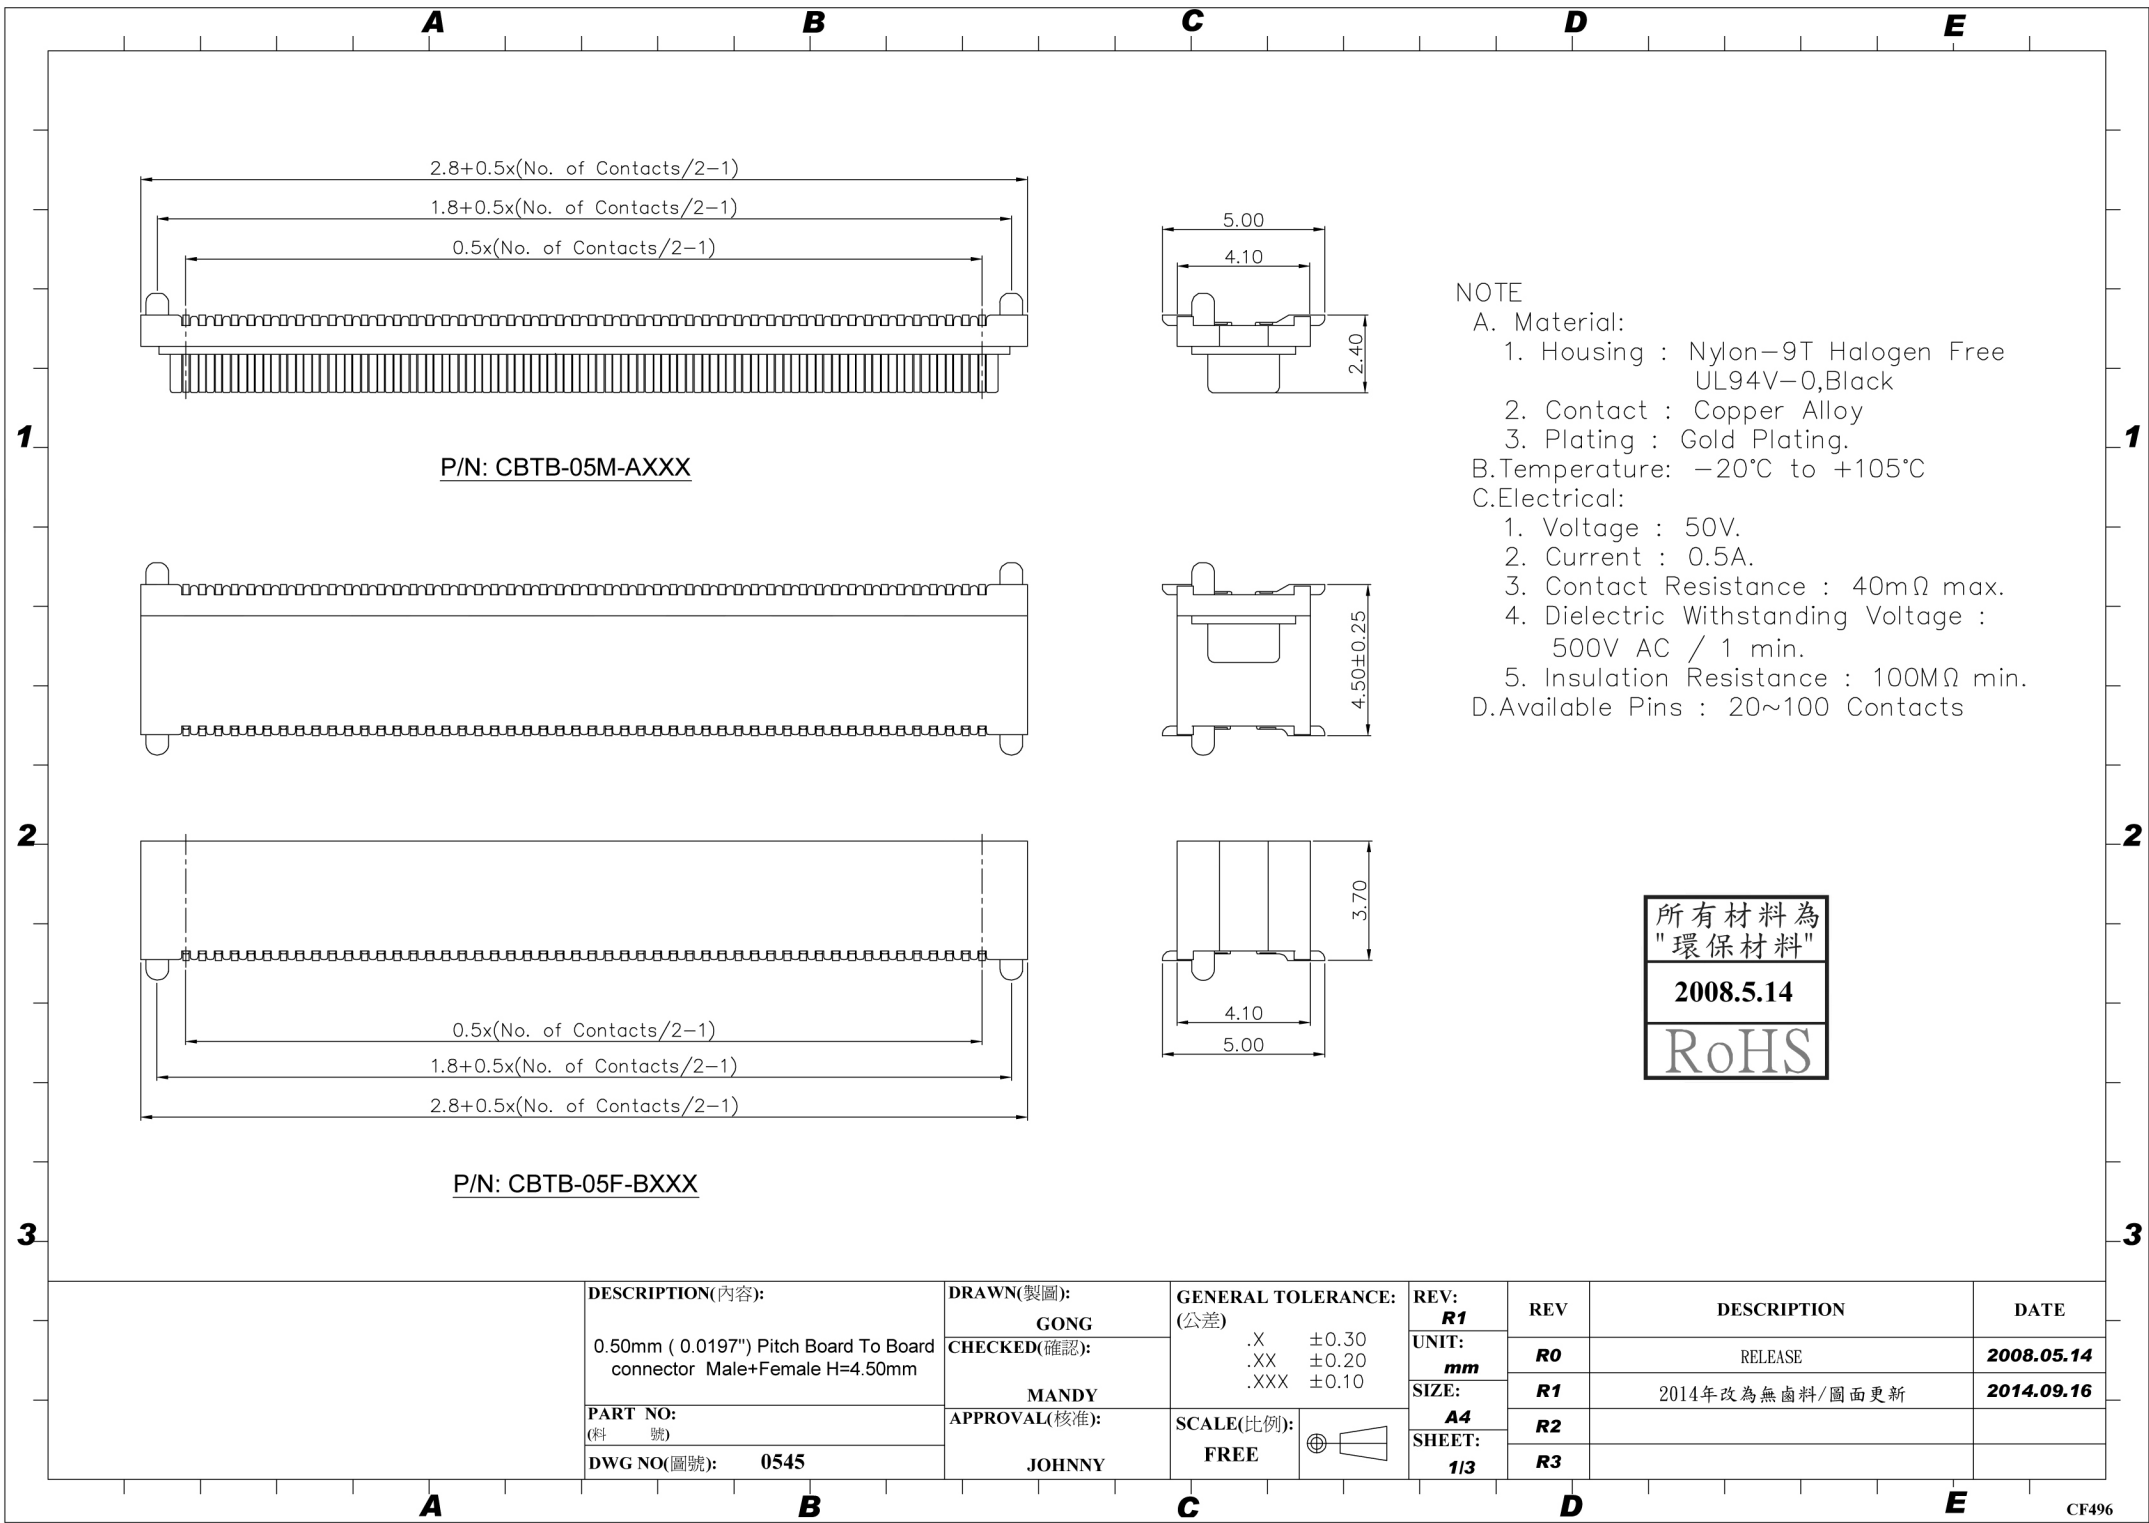

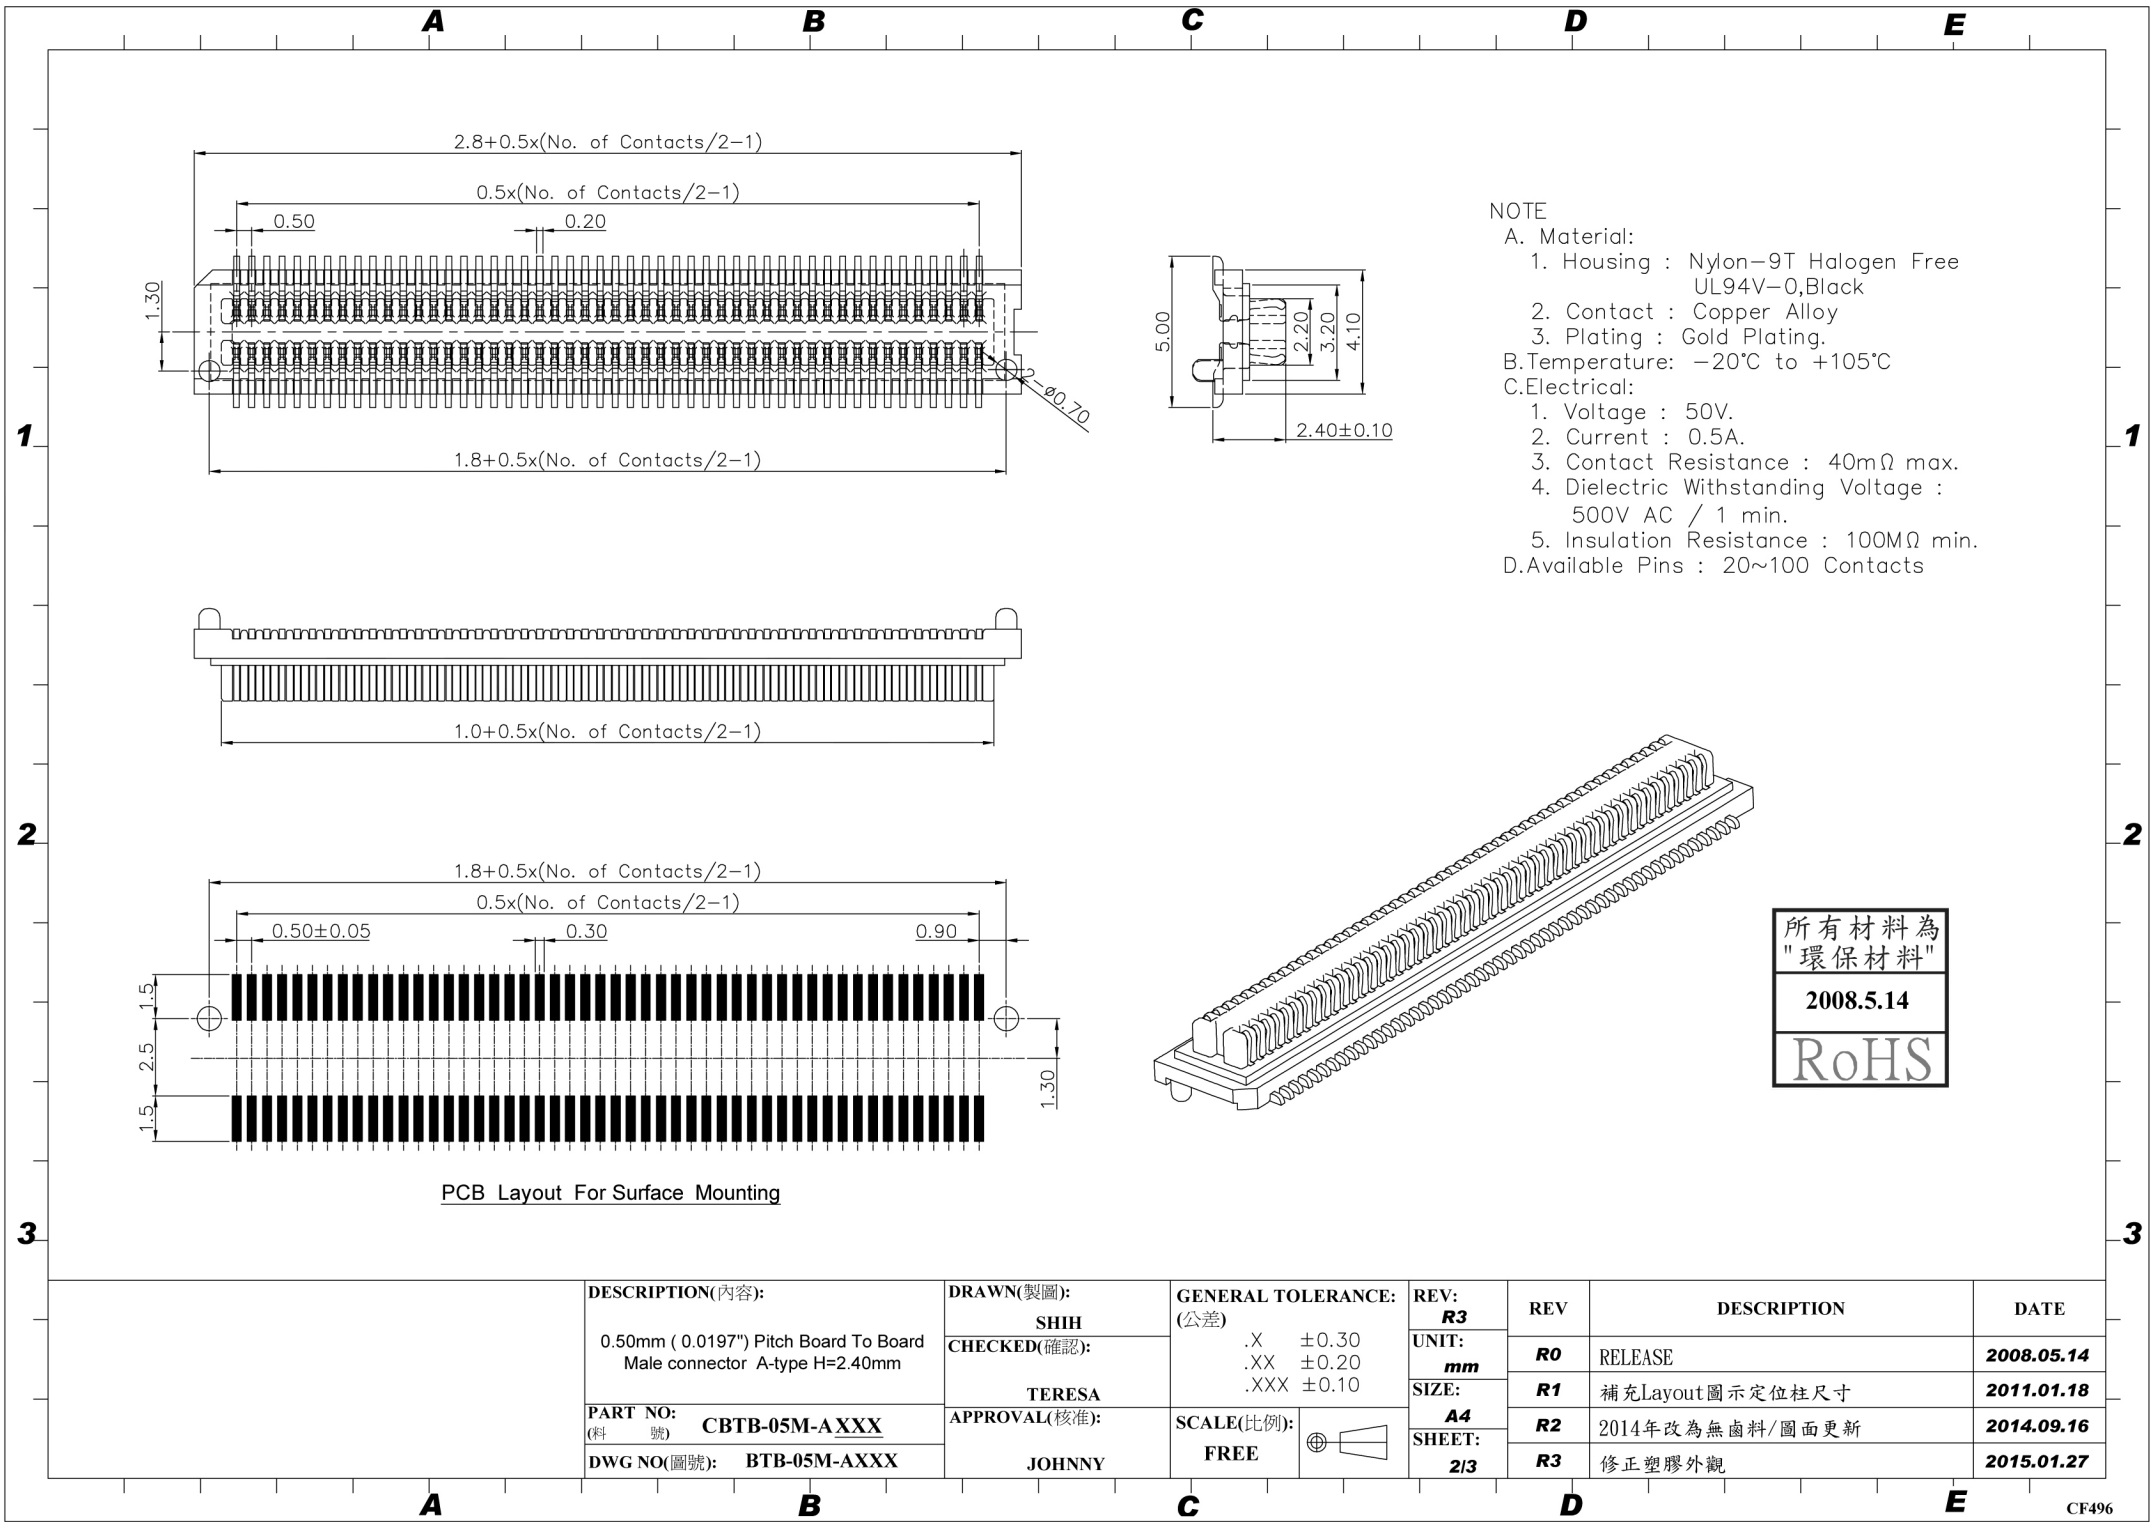

NOTE

A. Material:

1. Housing : Nylon-9T Halogen Free
UL94V-0,Black
2. Contact : Copper Alloy
3. Plating : Gold Plating.

B. Temperature: -20°C to +105°C

C. Electrical:


1. Voltage : 50V.
2. Current : 0.5A.
3. Contact Resistance : 40mΩ max.
4. Dielectric Withstanding Voltage :
500V AC / 1 min.
5. Insulation Resistance : 100MΩ min.

D. Available Pins : 20~100 Contacts

所有材料為
"環保材料"
2008.5.14
RoHS

PCB Layout For Surface Mounting

DESCRIPTION(內容):		DRAWN(製圖):		GENERAL TOLERANCE:		REV:	REV	DESCRIPTION	DATE
0.50mm (0.0197") Pitch Board To Board Male connector A-type H=2.40mm		SHIH		(公差)		R3			
PART NO:		CHECKED(確認):		.X ±0.30		UNIT:	R0	RELEASE	2008.05.14
(料 號)		TERESA		.XX ±0.20		mm	R1		
DWG NO(圖號):		APPROVAL(核准):		.XXX ±0.10		SIZE:	R2	補充Layout圖示定位柱尺寸	2011.01.18
BTB-05M-AXXX		JOHNNY		SCALE(比例):		A4	R3	2014年改為無鹵料/圖面更新	2014.09.16
				FREE		SHEET:		修正塑膠外觀	2015.01.27
						2/3			

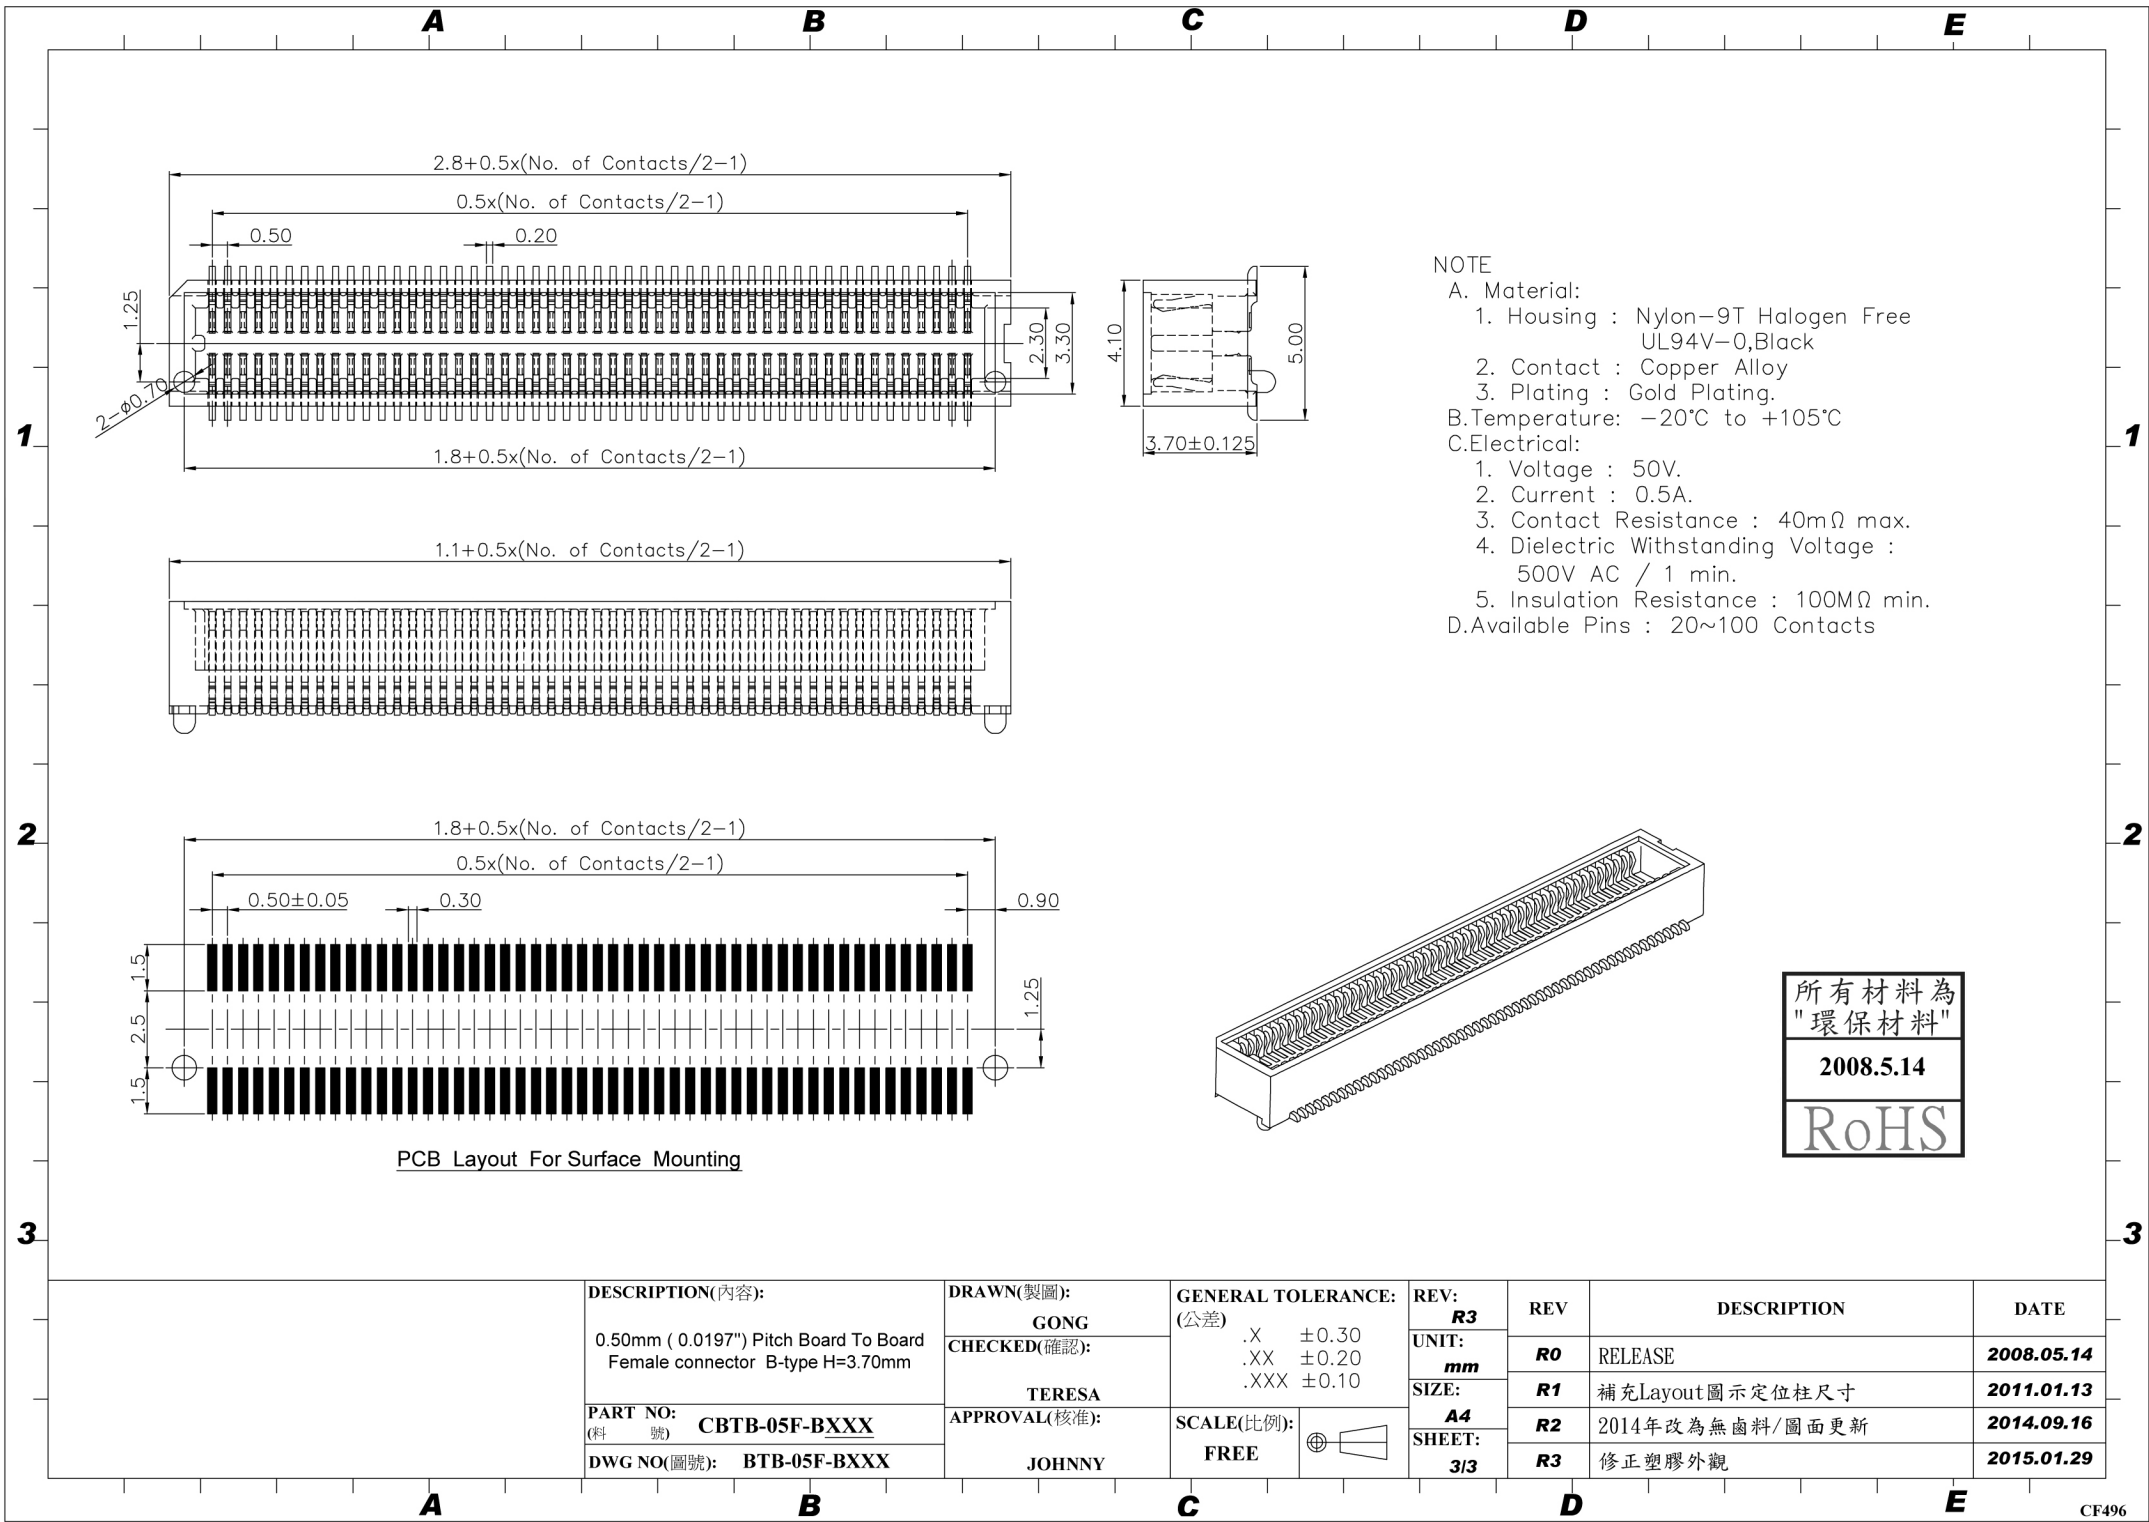

DESCRIPTION(內容):	DRAWN(製圖):	GENERAL TOLERANCE: (公差)	REV: R3	REV	DESCRIPTION	DATE
0.50mm (0.0197") Pitch Board To Board Female connector B-type H=3.70mm	GONG	.X ±0.30	UNIT: mm	R0	RELEASE	2008.05.14
	CHECKED(確認):	.XX ±0.20	SIZE: A4	R1	補充Layout圖示定位柱尺寸	2011.01.13
	TERESA	.XXX ±0.10	SHEET: 3/3	R2	2014年改為無齒料/圖面更新	2014.09.16
	APPROVAL(核准):	SCALE(比例): 		R3	修正塑膠外觀	2015.01.29
PART NO: (料 號) CBTB-05F-BXXX	JOHNNY	FREE				
DWG NO(圖號): BTB-05F-BXXX						