



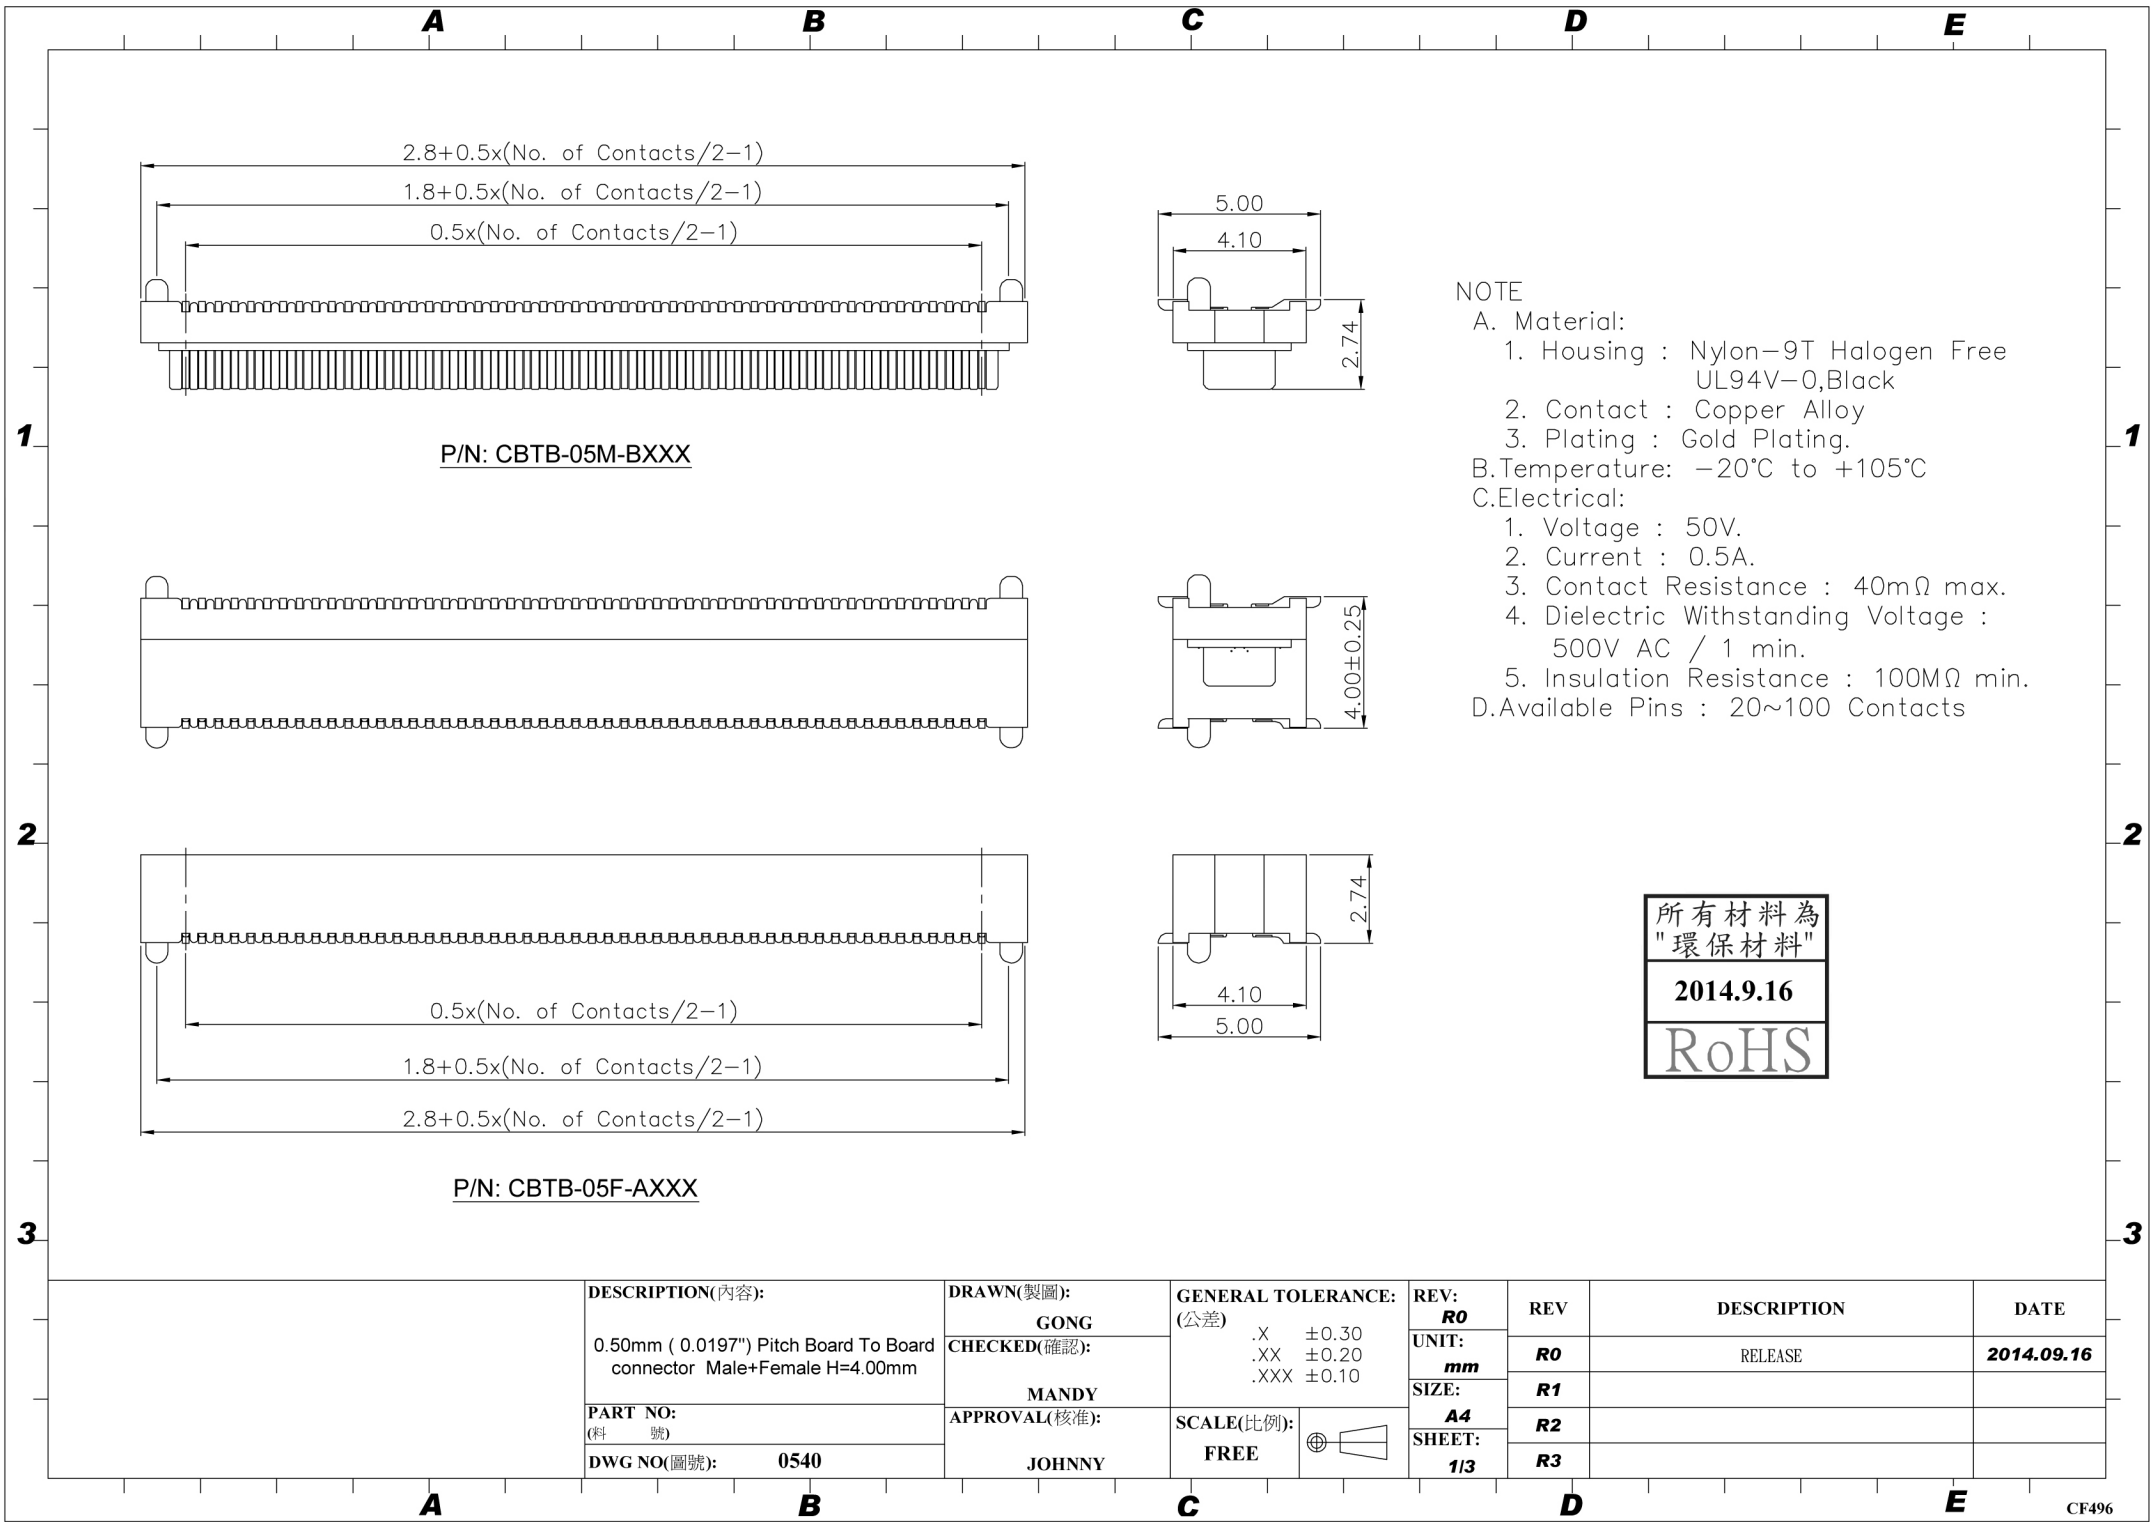

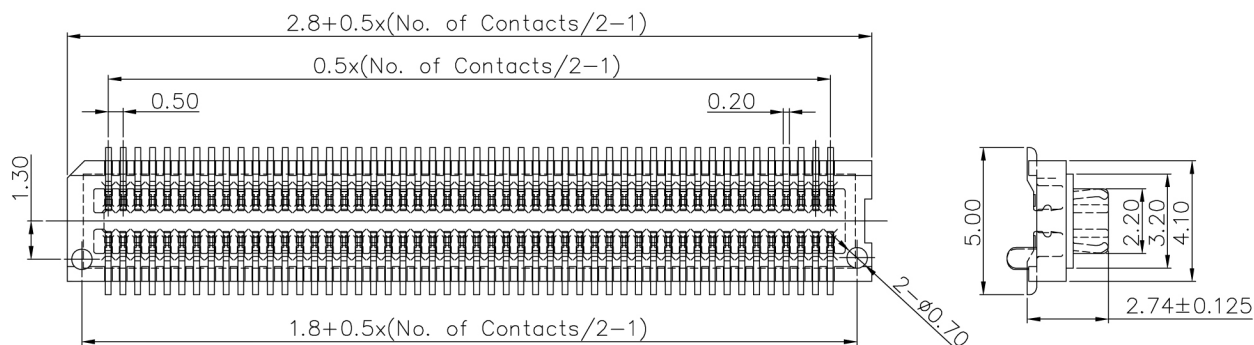

NOTE

A. Material:


1. Housing : Nylon-9T Halogen Free
UL94V-0,Black
2. Contact : Copper Alloy
3. Plating : Gold Plating.

B.Temperature: -20°C to +105°C


C.Electrical:

1. Voltage : 50V.
2. Current : 0.5A.
3. Contact Resistance : 40mΩ max.
4. Dielectric Withstanding Voltage :
500V AC / 1 min.
5. Insulation Resistance : 100MΩ min.

D.Available Pins : 20~100 Contacts

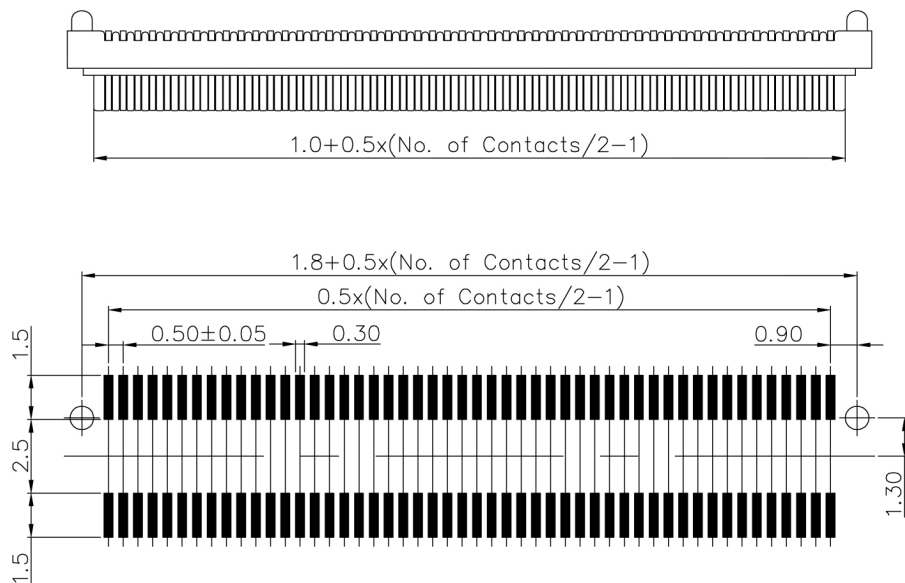

PCB Layout For Surface Mounting

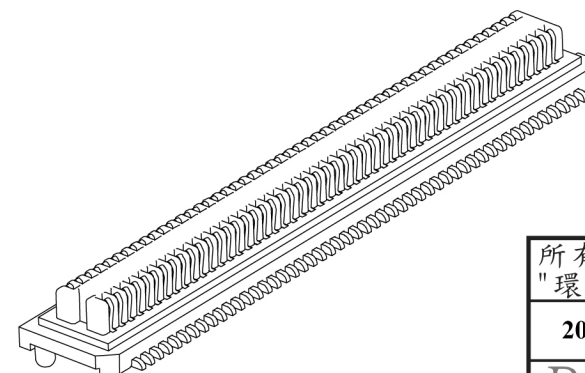

所有材料為
"環保材料"
2007.7.05
RoHS

DESCRIPTION(內容):
0.50mm (0.0197") Pitch Board To Board
Male connector B-type H=2.74mm



PART NO:
(料 號) **CBTB-05M-BXXX**
DWG NO(圖號): **BTB-05M-BXXX**

DRAWN(製圖):
GONG
CHECKED(確認):
MANDY
APPROVAL(核准):
JOHNNY

GENERAL TOLERANCE:
(公差)
.X ±0.30
.XX ±0.20
.XXX ±0.10
SCALE(比例):
FREE

REV:
R2
UNIT:
mm
SIZE:
A4
SHEET:
2/3

REV	DESCRIPTION	DATE
R0	RELEASE	2007.07.05
R1	補充Layout圖示定位柱尺寸	2011.01.07
R2	2014年改為無鹵料/圖面更新	2014.09.16
R3	修正塑膠外觀	2015.01.23

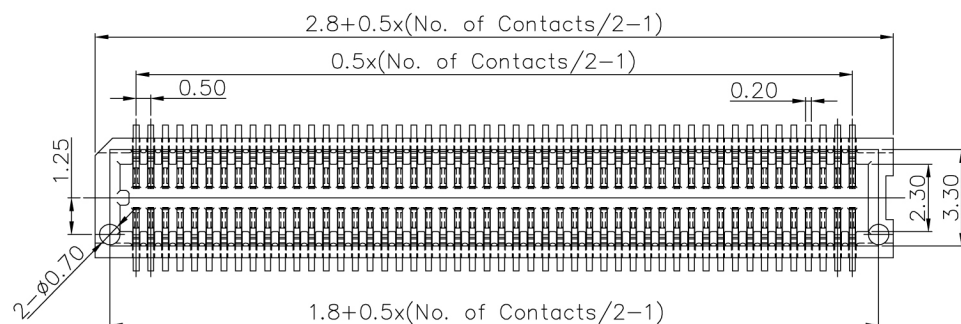

NOTE

A. Material:



1. Housing : Nylon-9T Halogen Free
UL94V-0,Black
2. Contact : Copper Alloy
3. Plating : Gold Plating.

B.Temperature: -20°C to +105°C


C.Electrical:

1. Voltage : 50V.
2. Current : 0.5A.
3. Contact Resistance : 40mΩ max.
4. Dielectric Withstanding Voltage :
500V AC / 1 min.
5. Insulation Resistance : 100MΩ min.

D.Available Pins : 20~100 Contacts

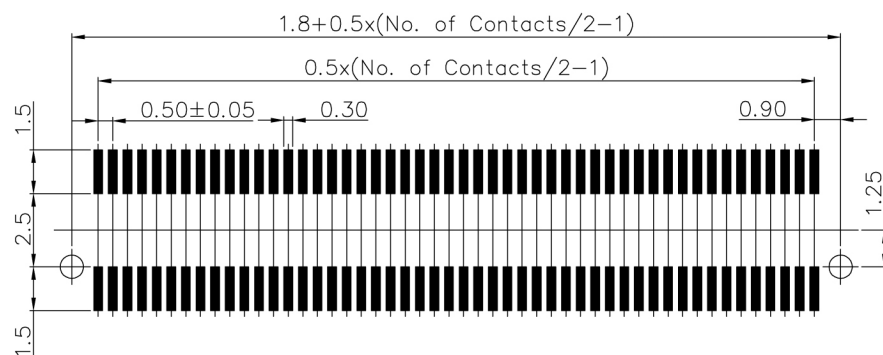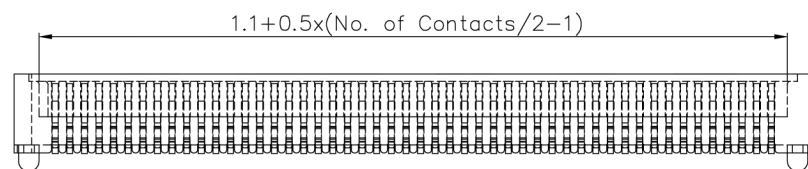

PCB Layout For Surface Mounting

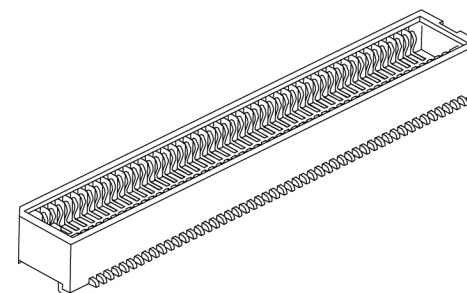

所有材料為
"環保材料"

2007.7.05

RoHS

DESCRIPTION(內容):
0.50mm (0.0197") Pitch Board To Board
Female connector A-type H=2.74mm

PART NO:
(料 號) **CBTB-05F-AXXX**
DWG NO(圖號): **BTB-05F-AXXX**

DRAWN(製圖):
GONG

CHECKED(確認):

MANDY

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:
(公差)

.X ±0.30
.XX ±0.20
.XXX ±0.10

SCALE(比例):
FREE



REV:
R3

UNIT:
mm

SIZE:

A4

SHEET:

3/3

REV

R0

R1

R2

R3

DESCRIPTION

RELEASE

補充Layout圖示定位柱尺寸

2014年改為無鹵料/圖面更新

修正塑膠外觀

DATE

2007.07.05

2011.01.07

2014.09.16

2015.01.23