



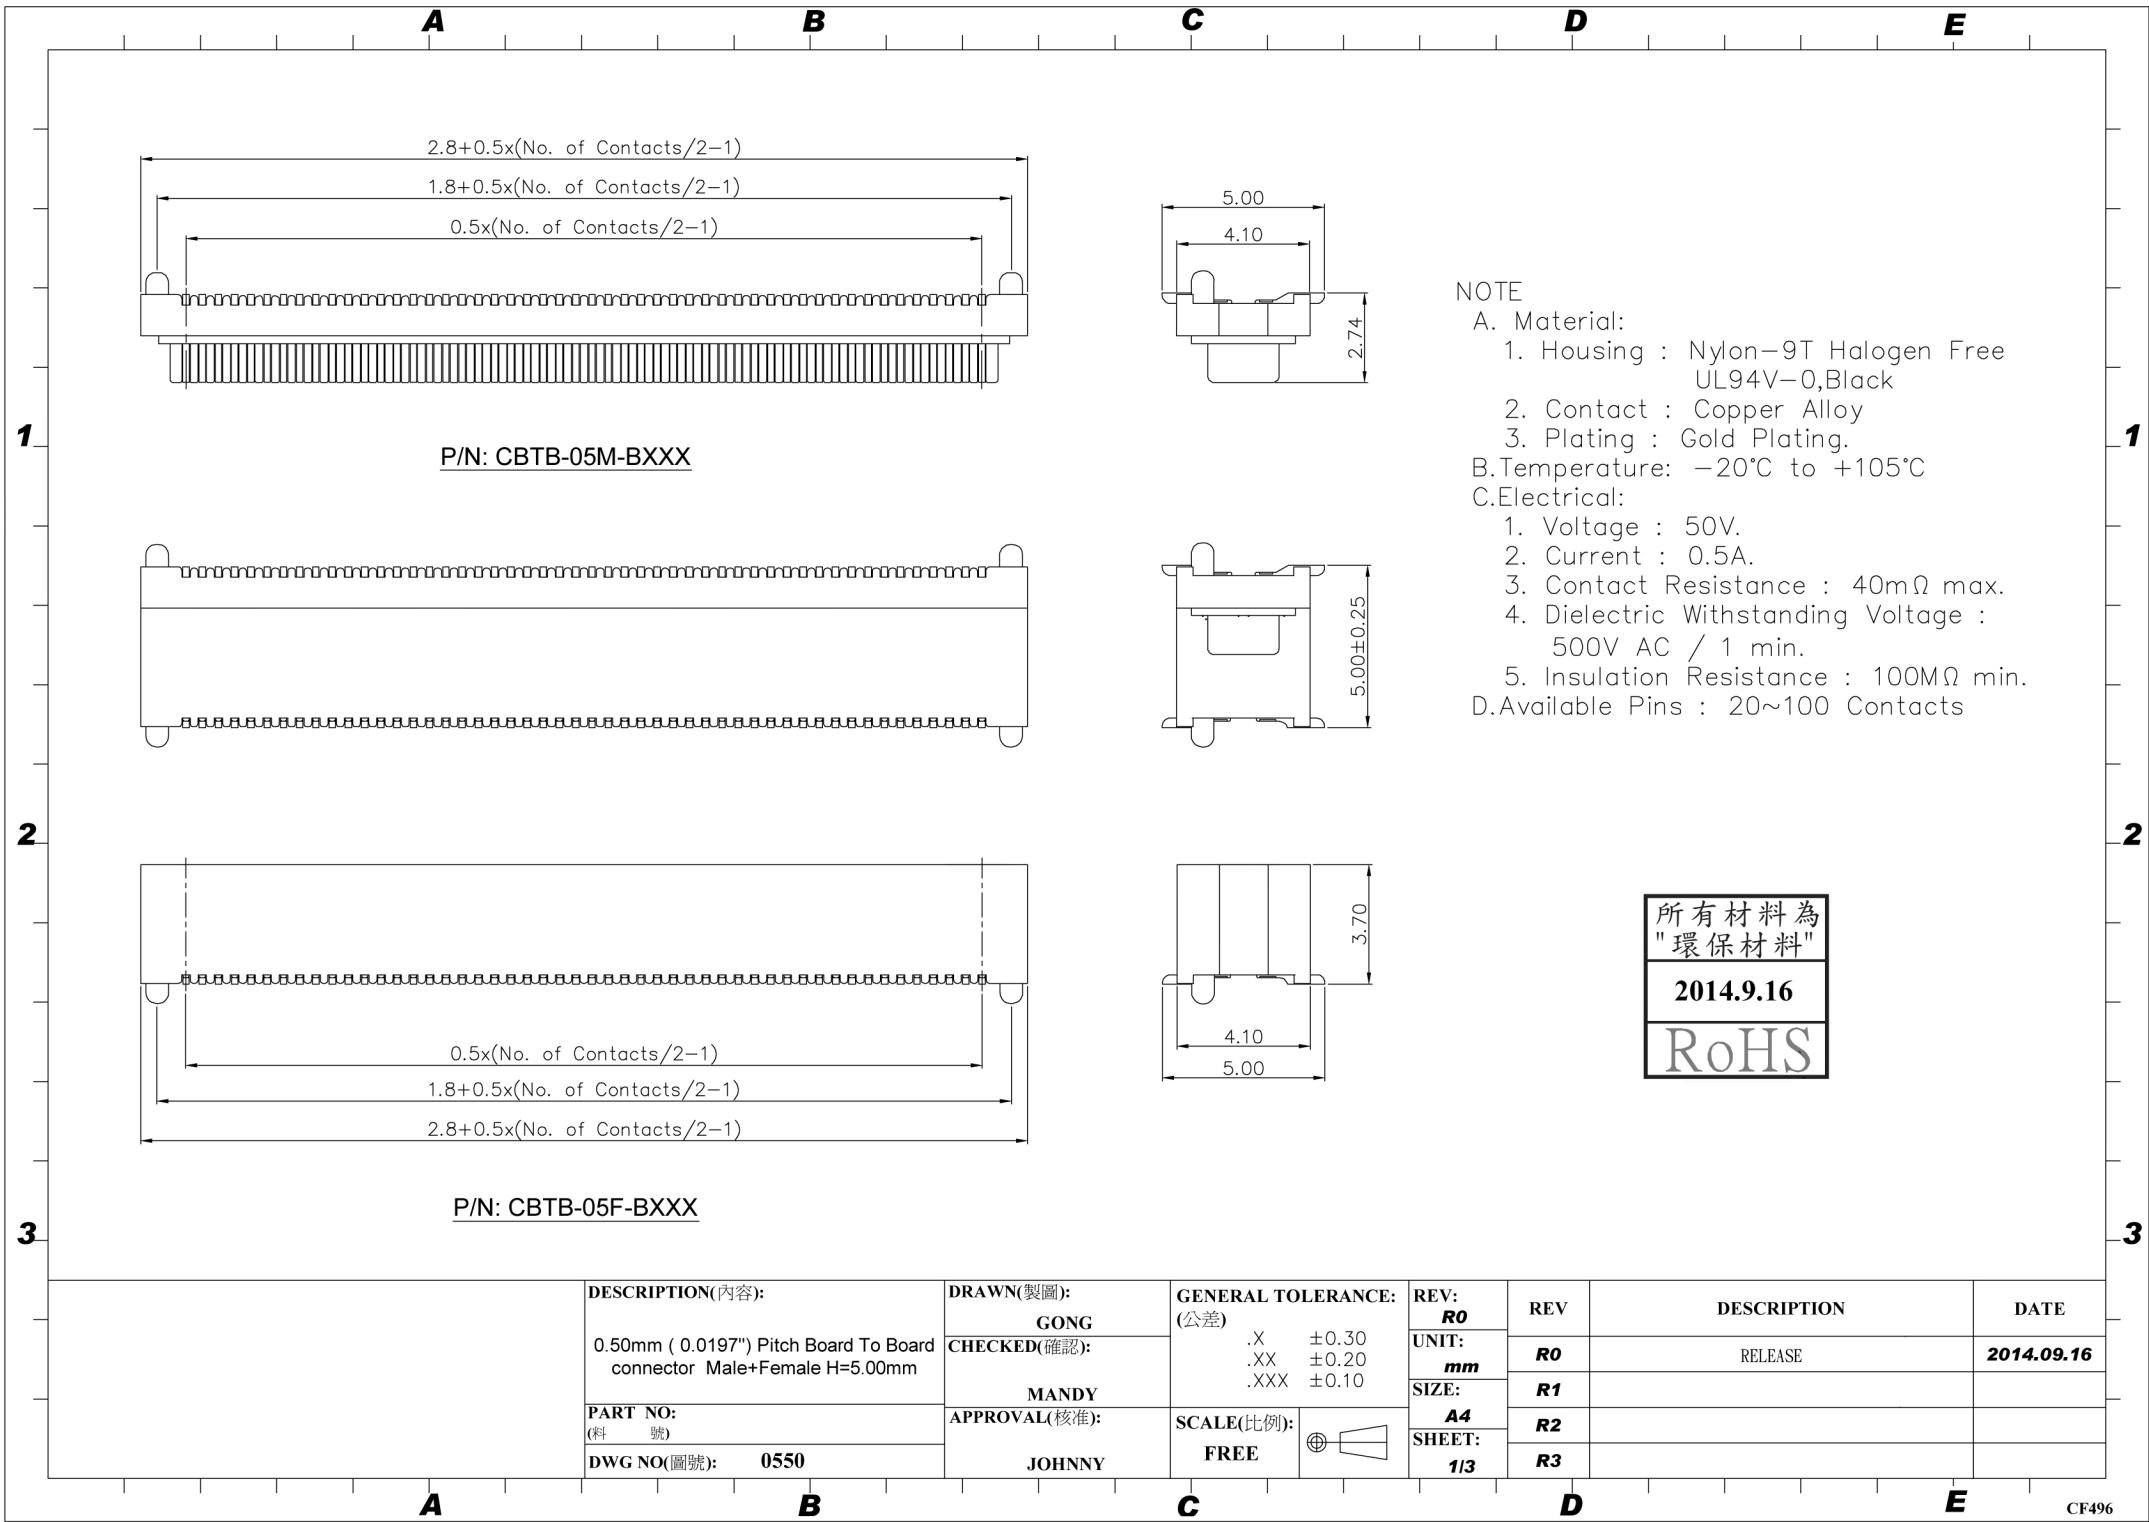

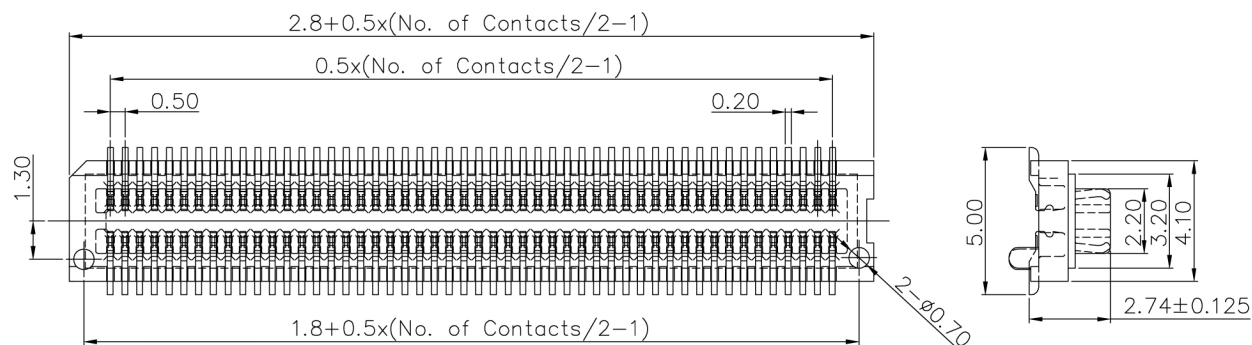

NOTE

A. Material:

1. Housing : Nylon-9T Halogen Free
UL94V-0,Black

2. Contact : Copper Alloy

3. Plating : Gold Plating.

B.Temperature: -20°C to +105°C

C.Electrical:

1. Voltage : 50V.



2. Current : 0.5A.

3. Contact Resistance : 40mΩ max.


4. Dielectric Withstanding Voltage :
500V AC / 1 min.

5. Insulation Resistance : 100MΩ min.

D.Available Pins : 20~100 Contacts

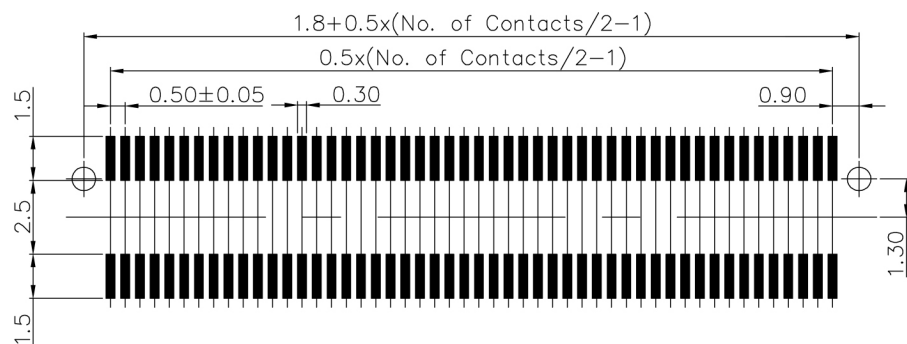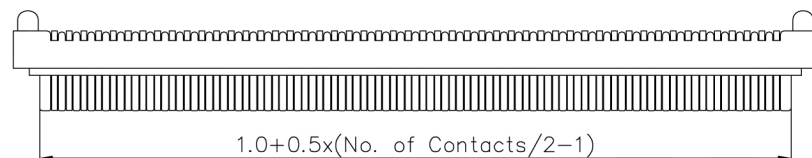

PCB Layout For Surface Mounting

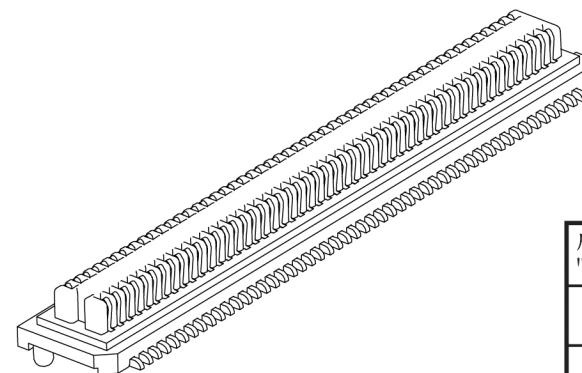

所有材料為
"環保材料"

2007.7.05

RoHS

DESCRIPTION(內容):

0.50mm (0.0197") Pitch Board To Board
Male connector B-type H=2.74mm

PART NO:
(料 號)

CBTB-05M-BXXX

DWG NO(圖號):

BTB-05M-BXXX

DRAWN(製圖):

GONG

CHECKED(確認):

MANDY

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE: (公差)

.X ±0.30

.XX ±0.20

.XXX ±0.10

SCALE(比例):

FREE

REV:

R3

UNIT:

mm

SIZE:

A4

2/3

REV

R0

R1

R2

R3

DESCRIPTION

RELEASE

補充Layout圖示定位柱尺寸

2014年改為無鹵料/圖面更新

修正塑膠外觀


DATE

2007.07.05

2011.01.07

2014.09.16

2015.01.23

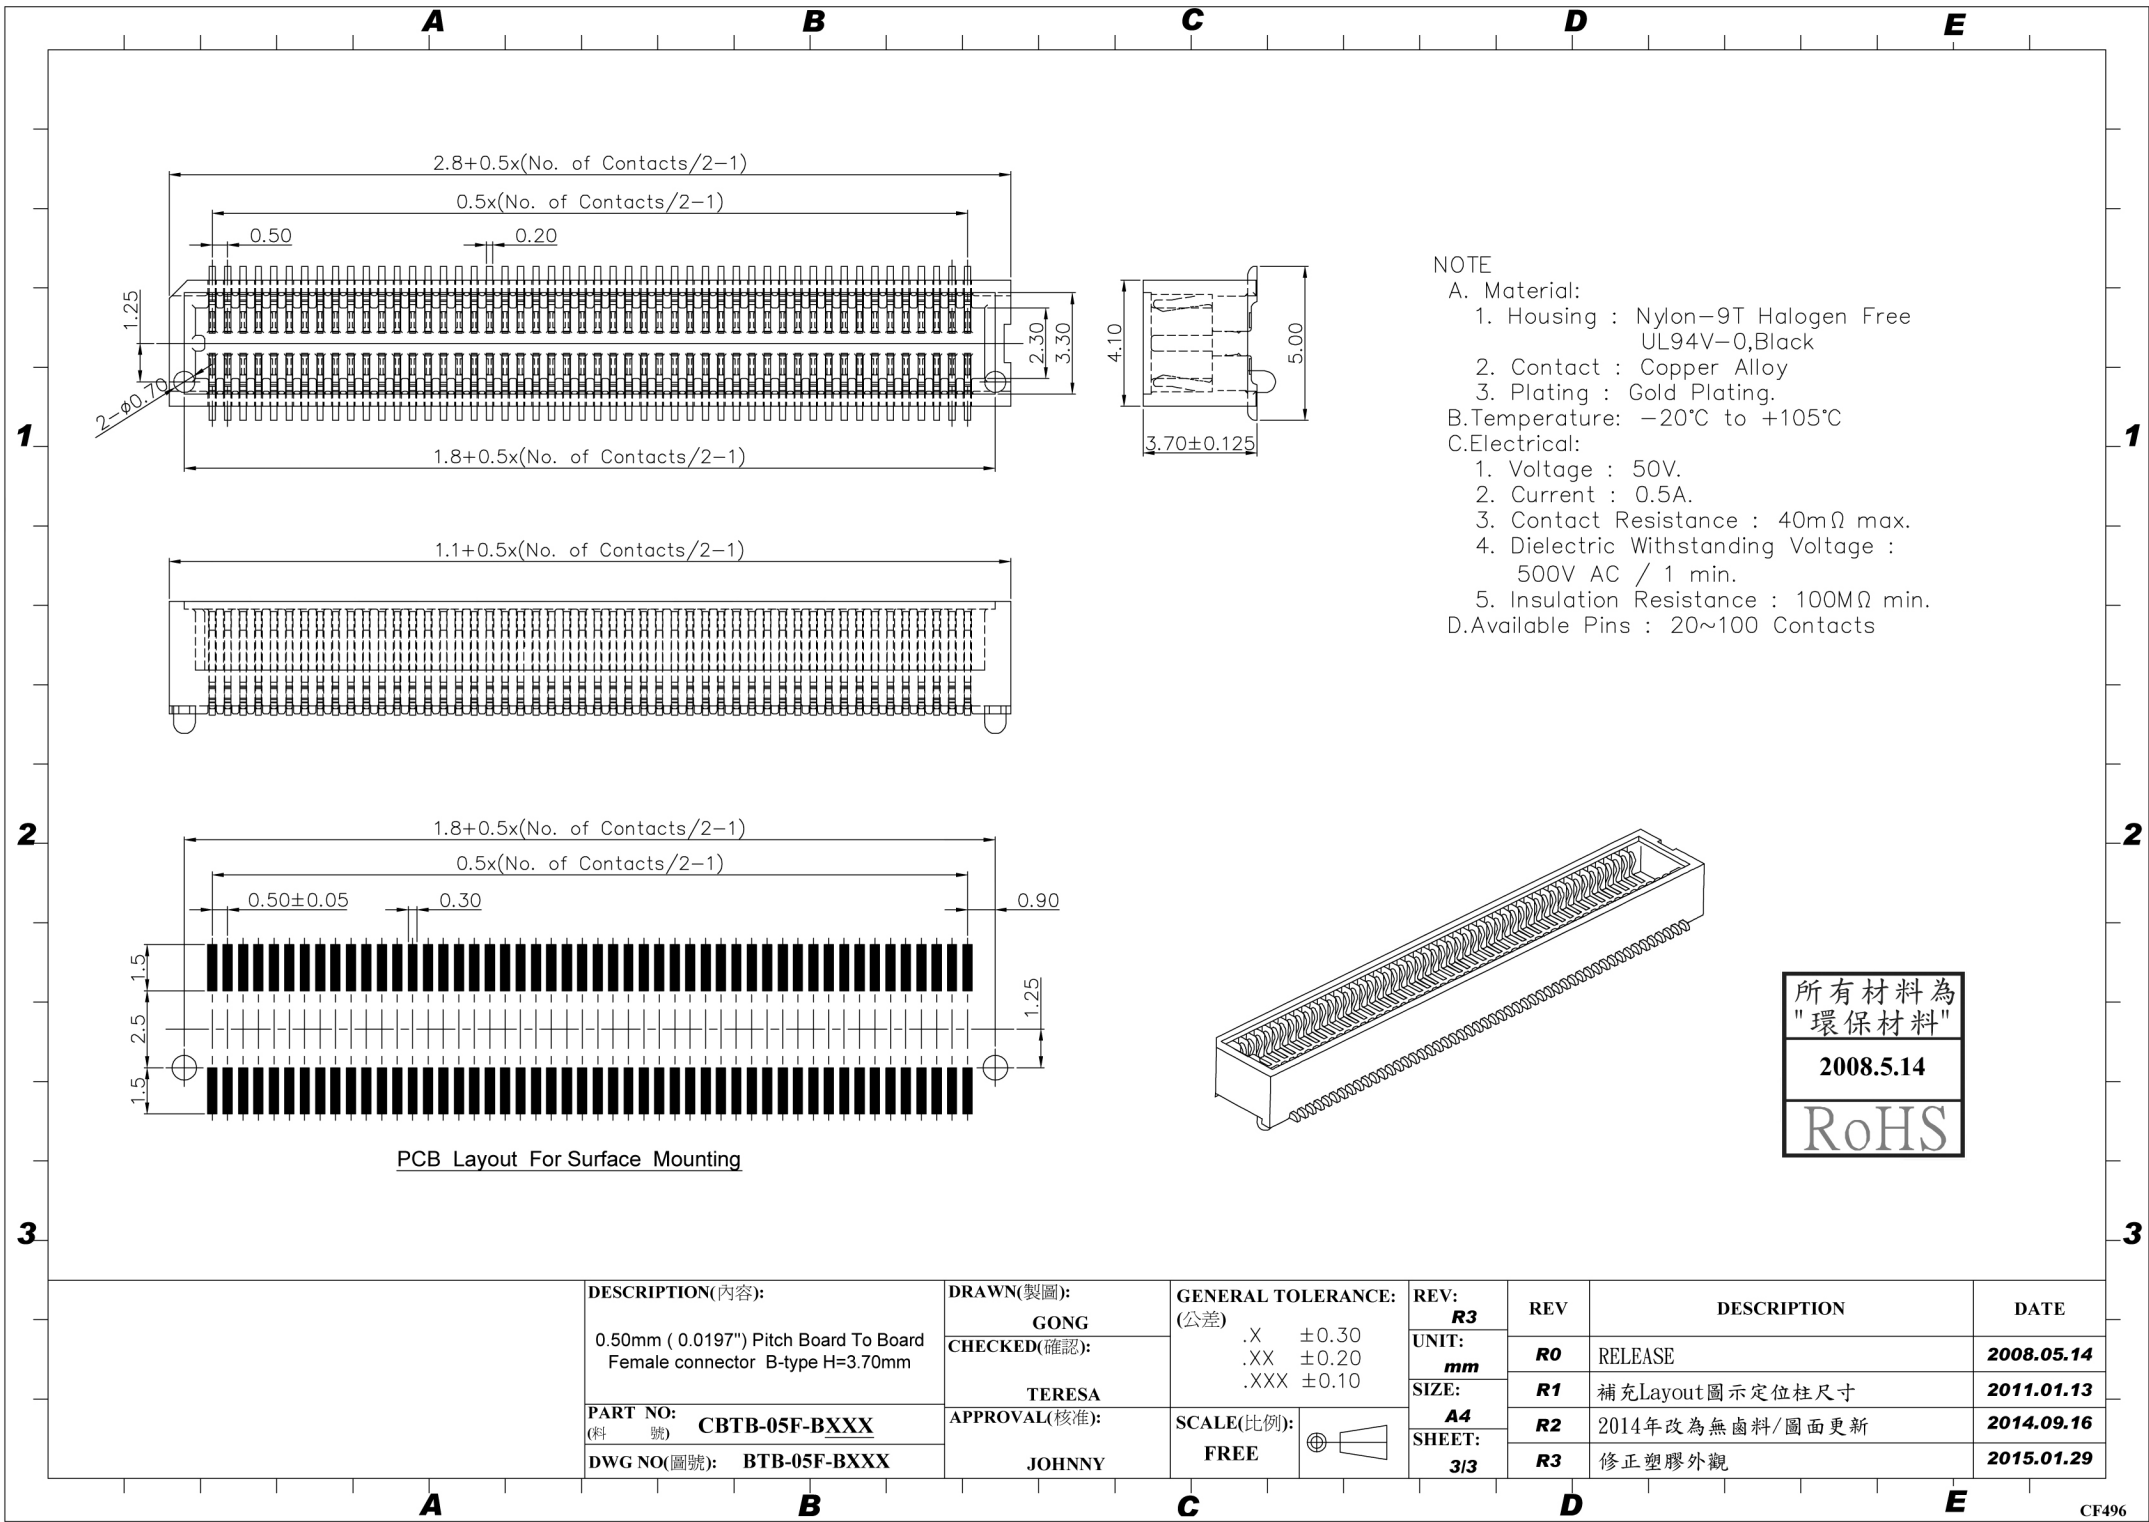

NOTE

A. Material:

- 1. Housing : Nylon-9T Halogen Free
UL94V-0,Black
- 2. Contact : Copper Alloy
- 3. Plating : Gold Plating.

B.Temperature: -20°C to +105°C

C.Electrical:

- 1. Voltage : 50V.
- 2. Current : 0.5A.
- 3. Contact Resistance : 40mΩ max.
- 4. Dielectric Withstanding Voltage :
500V AC / 1 min.
- 5. Insulation Resistance : 100MΩ min.

D.Available Pins : 20~100 Contacts

所有材料為
"環保材料"

2008.5.14

RoHS

DESCRIPTION(內容):	DRAWN(製圖):	GENERAL TOLERANCE: (公差)		REV: R3	REV	DESCRIPTION	DATE
0.50mm (0.0197") Pitch Board To Board Female connector B-type H=3.70mm	GONG	.X	±0.30	UNIT: mm	R0	RELEASE	2008.05.14
	CHECKED(確認):	.XX	±0.20	SIZE: A4	R1	補充Layout圖示定位柱尺寸	2011.01.13
	TERESA	.XXX	±0.10	SHEET: 3/3	R2	2014年改為無齒料/圖面更新	2014.09.16
PART NO: (料 號) CBTB-05F-BXXX	APPROVAL(核准):	SCALE(比例):					
DWG NO(圖號): BTB-05F-BXXX	JOHNNY	FREE					