





P/N: CBTB-08MB-AXXX



所有材料為
"環保材料"
2014.9.10
RoHS

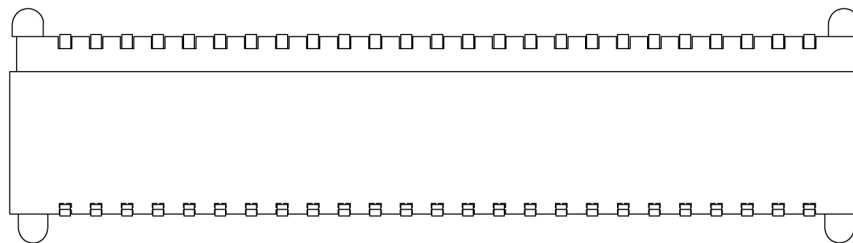

P/N: CBTB-08FB-AXXX



NOTE

A. Material:

1. Housing : Nylon-9T Halogen Free
UL94V-0,Black

2. Contact : Copper Alloy

B. Plating : Gold Plating.

C. Temperature: -55°C to +125°C

D. Electrical:

1. Voltage : 50V.

2. Current : 0.5A.

3. Contact Resistance : 40mΩ max.

4. Dielectric Withstanding Voltage :
500V AC / 1 min.

5. Insulation Resistance : 100MΩ min.

E. Available Pins : 10~100 Contacts

DESCRIPTION(內容):

0.80mm (0.031") Pitch Board To Board
Connector Male+Female H=4.60mm

PART NO:
(料 號)

DWG NO(圖號): 0846B

DRAWN(製圖):

GONG

CHECKED(確認):

MANDY

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:
(公差)

. X ±0.25
. XX ±0.10
. XXX ±0.05

SCALE(比例):

FREE



REV:

R1

UNIT:

mm

SIZE:

A4

SHEET:

1/3

REV

R0

R1

R2

R3

DESCRIPTION



RELEASE/2014改為無鹵料

變更圖號(原:BTB-0846-B)

DATE


2014.09.10

2014.09.16

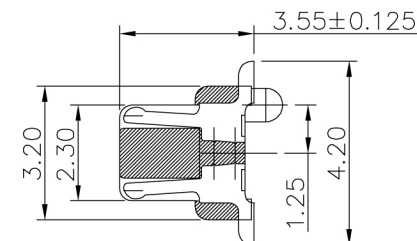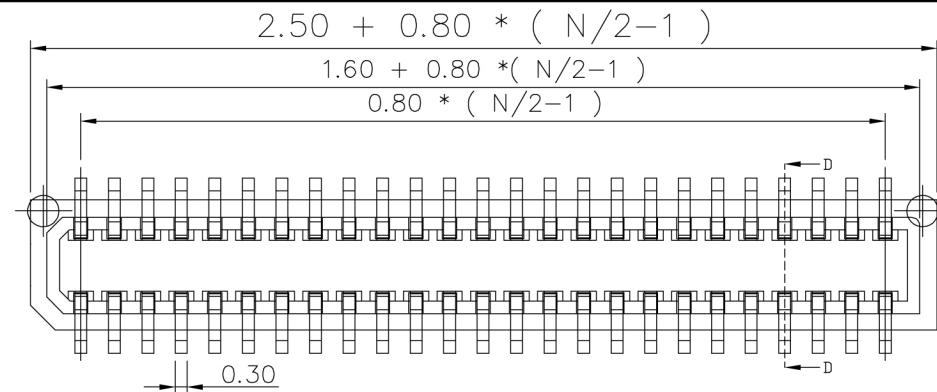

D-D

所有材料為
"環保材料"
2007.6.14
RoHS

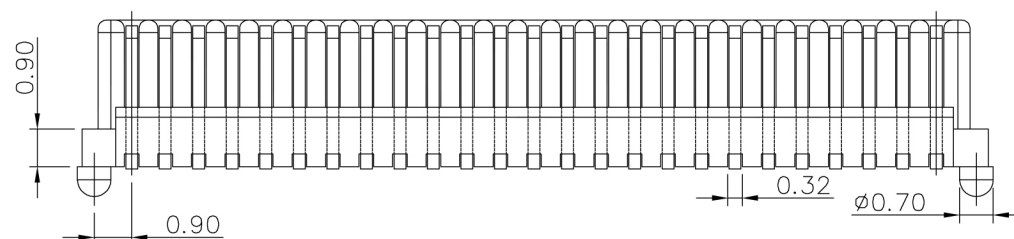

NOTE

A. Material:

1. Housing : Nylon-9T Halogen Free,
UL94V-0, Black

2. Contact : Copper Alloy

B. Plating: Gold plating

C. Temperature: -55°C to 125°C

D. Electrical:

1. Voltage : 50V.


2. Current : 0.5A.

3. Contact Resistance : 40m Ω max.

4. Dielectric Withstanding Voltage :
500V AC / 1 min.

5. Insulation Resistance : 100M Ω min.

Available Pins : 10~100 Contacts

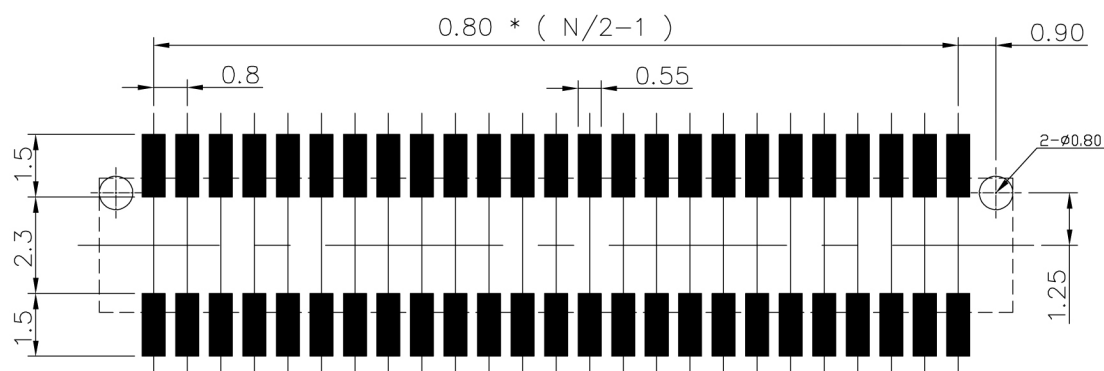

PCB Layout For
Surface Mounting

DESCRIPTION(內容):
0.80mm (0.031") Pitch
Board To Board
Male connector H=3.55mm

PART NO:
(料 號) **CBTB-08MB-AXXX**

DWG NO(圖號): **BTB-08P-AXXXB**

DRAWN(製圖):

Gong

CHECKED(確認):

MANDY

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:

(公差)
.X ±0.30
.XX ±0.250
.XXX ±0.20

SCALE(比例):

FREE

REV:

R2

UNIT:

mm

SIZE:

A4

SHEET:

2/3

REV

R0

R1

R2

R3

DESCRIPTION

RELEASE

變更 Contact 材質: Proper Bronze-Copper Alloy

2014 改為無鹵材料料號更新(原: CBTB-08P-AXXX)



圖號更新(原: BTB-08P-AXXX)

DATE

2007.06.14



2009.06.19

2014.09.09

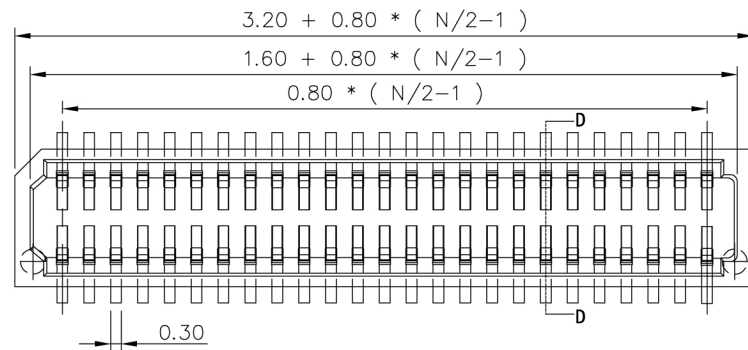

D-D

所有材料為
「環保材料」
2008.4.18
RoHS

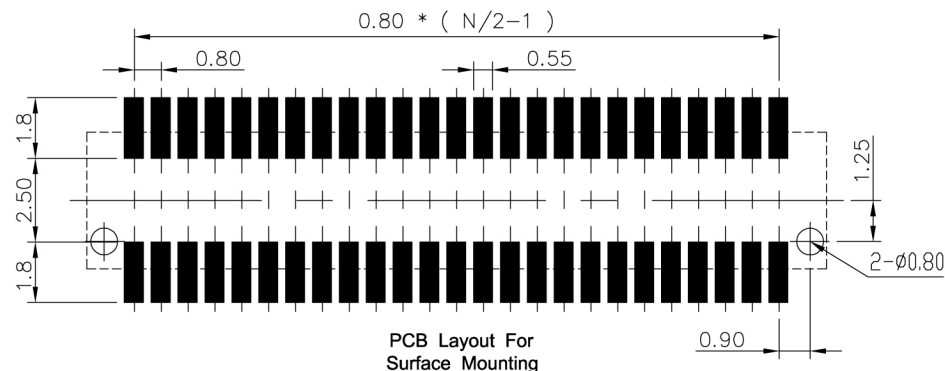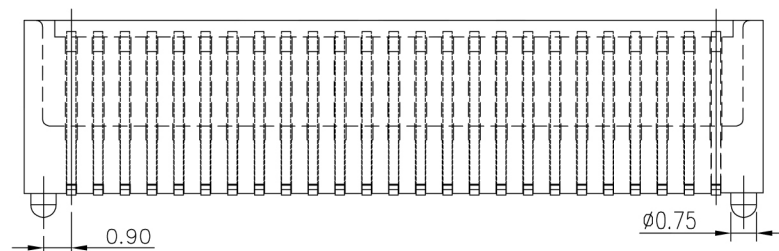

NOTE

A. Material:

1. Housing : Nylon-9T Halogen Free
UL94V-0,Black

2. Contact : Copper Alloy

B. Plating : Gold Plating.

C. Temperature: -55°C to +125°C

D. Electrical:

1. Voltage : 50V.

2. Current : 0.5A.

3. Contact Resistance : 40mΩ max.

4. Dielectric Withstanding Voltage :
500V AC / 1 min.

5. Insulation Resistance : 100MΩ min.

E. Available Pins : 10~100 Contacts

DESCRIPTION(內容):	DRAWN(製圖): GONG	GENERAL TOLERANCE: (公差)	REV: R2	REV	DESCRIPTION	DATE
0.80mm (0.031") Pitch Board To Board Female connector H=3.55mm	CHECKED(確認): MANDY	.X ±0.25 .XX ±0.10 .XXX ±0.05	UNIT: mm	R0	RELEASE	2008.04.18
PART NO: (料號) CBTB-08FB-AXXX	APPROVAL(核准): JOHNNY	SCALE(比例): FREE	SIZE: A4	R1	變更 Contact 材質: Phosphor Bronze Copper Alloy	2009.06.18
DWG NO(圖號): BTB-08R-AXXXB			SHEET: 3/3	R2	2014 改為無鹵料 / 料號更新 (原: CBTB-08-A000) 圖號更新 (原: BTB-08R-A000)	2014.09.10
				R3		