

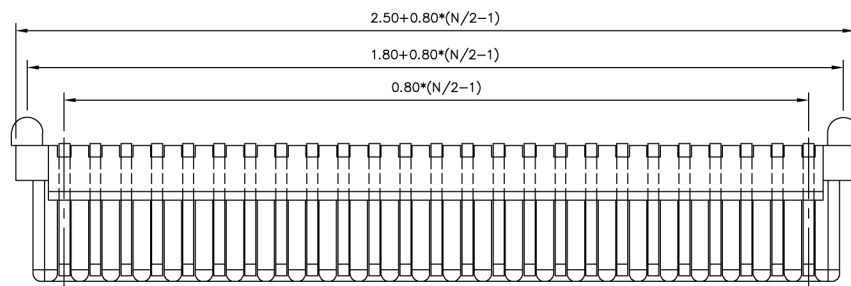




所有材料為
"環保材料"
2014.9.09
RoHS

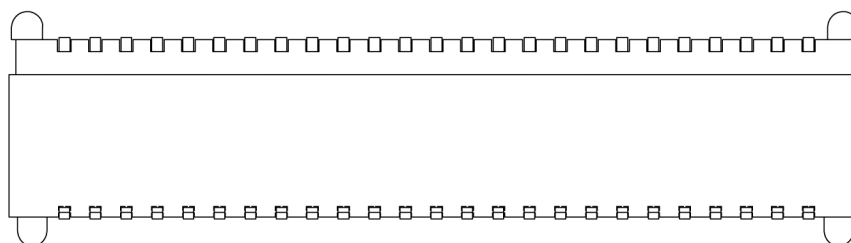

P/N: CBTB-08MB-AXXX



P/N: CBTB-08FB-BXXX



NOTE

A. Material:

1. Housing : Nylon-9T Halogen Free,
UL94V-0, Black

2. Contact : Copper Alloy

B. Plating: Gold plating

C. Temperature: -55°C to 125°C

D. Electrical:

1. Voltage : 50V.
2. Current : 0.5A.
3. Contact Resistance : 40m Ω max.
4. Dielectric Withstanding Voltage :
500V AC / 1 min.
5. Insulation Resistance : 100M Ω min.

Available Pins : 10~100 Contacts

DESCRIPTION(內容):

0.80mm (0.031") Pitch Board To Board
Connector Male+Female H=6.00mm

PART NO:
(料 號)

DWG NO(圖號): 0860B

DRAWN(製圖):

GONG

CHECKED(確認):

MANDY

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE: (公差)

. X ±0.25
. XX ±0.10
. XXX ±0.05

SCALE(比例):

FREE



REV:

R0

UNIT:

mm

SIZE:

A4

SHEET:

1/3

REV

R0

R1

R2



R3

DESCRIPTION

RELEASE



DATE

2014.09.09

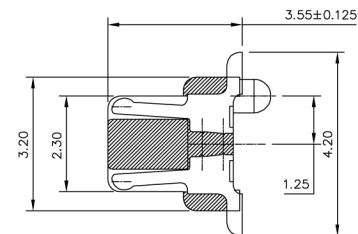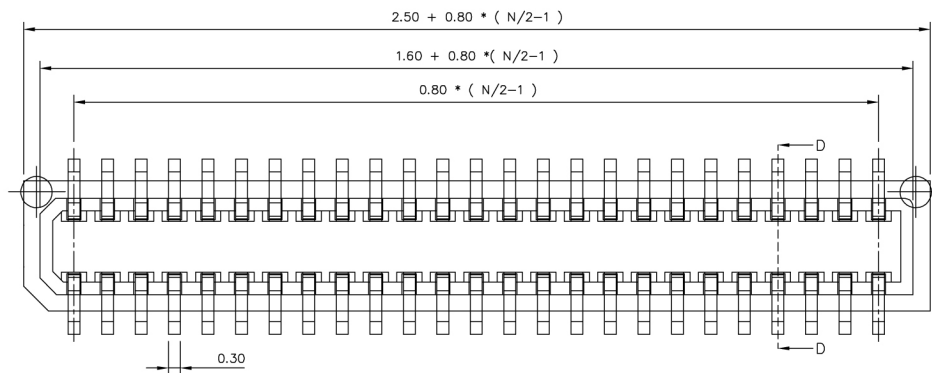

D-D

所有材料為
"環保材料"
2007.6.14
RoHS

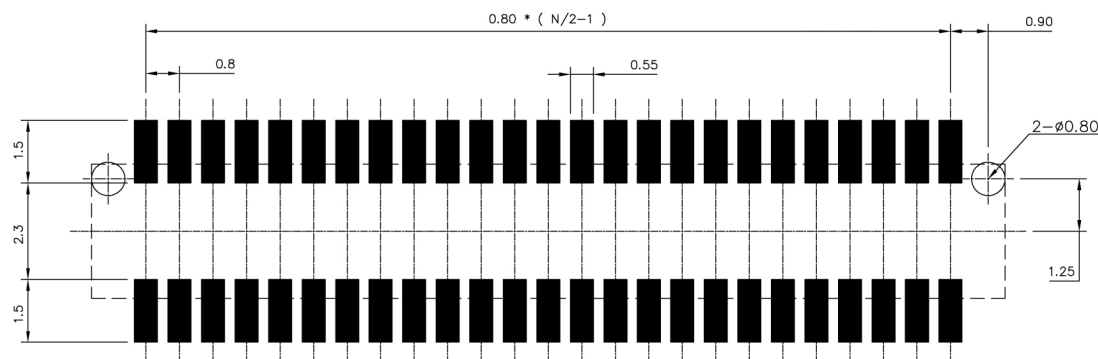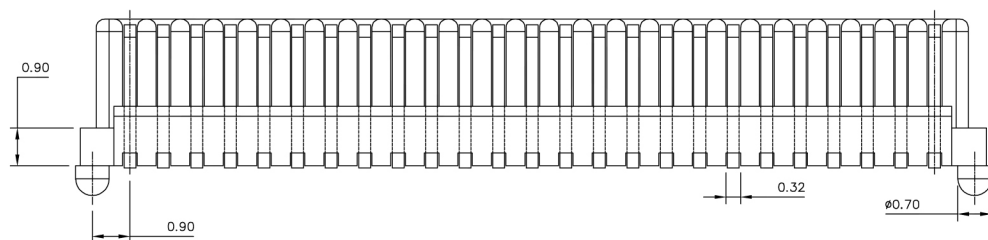

PCB Layout For
Surface Mounting

NOTE

A. Material:

1. Housing : Nylon-9T Halogen Free, UL94V-0, Black
2. Contact : Copper Alloy

B. Plating: Gold plating

C. Temperature: -55°C to 125°C

D. Electrical:

1. Voltage : 50V.
2. Current : 0.5A.
3. Contact Resistance : 40m Ω max.
4. Dielectric Withstanding Voltage : 500V AC / 1 min.
5. Insulation Resistance : 100M Ω min.

Available Pins : 10~100 Contacts

REV:	REV	DESCRIPTION	DATE
R2	R0	RELEASE	2007.06.14
UNIT:	R1	變更 Contact 材質: Proper Bronze-Copper Alloy	2009.06.19
mm	R2	2014 改為無鹵材料料號更新(原: CBTB-08MB-XXXX)	2014.09.09
SIZE:	R3	圖號更新(原: BTB-08P-XXXX)	
A4			
SHEET:			
2/3			

DESCRIPTION(內容):
0.80mm (0.031") Pitch
Board To Board
Male connector H=3.55mm

PART NO:
(料 號) CBTB-08MB-XXXX

DWG NO(圖號): BTB-08P-XXXXB

DRAWN(製圖):

Gong

CHECKED(確認):

MANDY

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:



(公差)

.X ±0.30
.XX ±0.250
.XXX ±0.20

SCALE(比例):



FREE



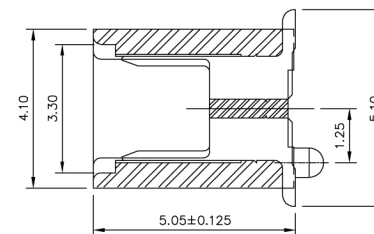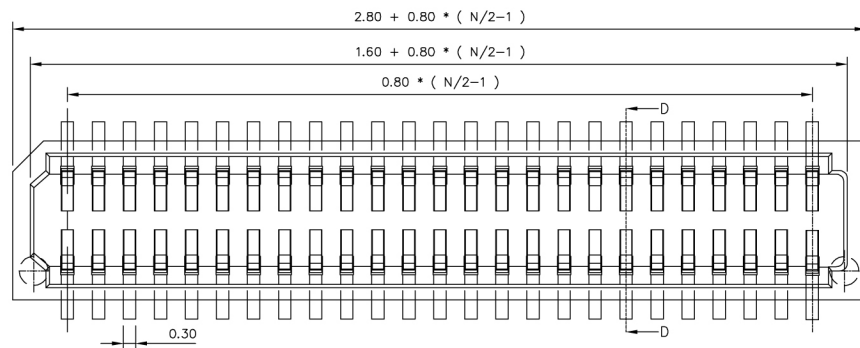

D-D

所有材料為
"環保材料"
2007.6.14
RoHS

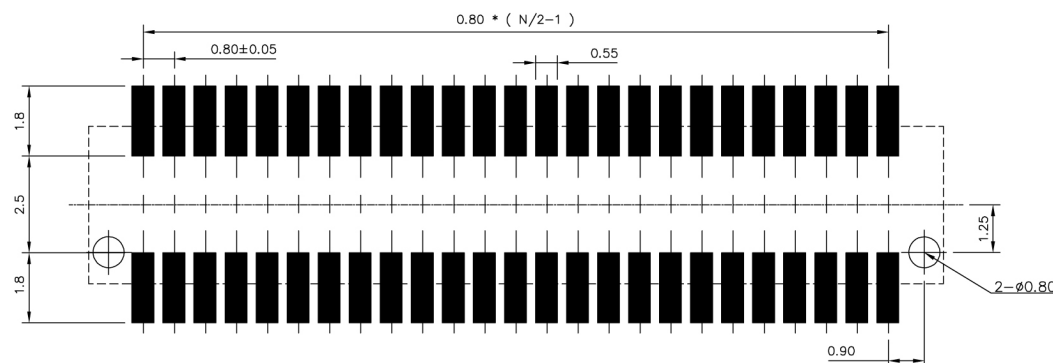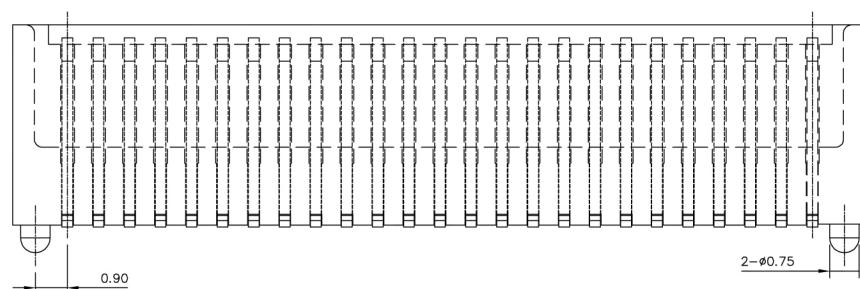

PCB Layout For
Surface Mounting

NOTE

A. Material:

1. Housing : Nylon-9T Halogen Free
UL94V-0,Black
2. Contact : Copper Alloy

B. Plating : Gold Plating.

C. Temperature: -55°C to +125°C

D. Electrical:

1. Voltage : 50V.
2. Current : 0.5A.
3. Contact Resistance : 40mΩ max.
4. Dielectric Withstanding Voltage :
500V AC / 1 min.
5. Insulation Resistance : 100MΩ min.

E. Available Pins : 10~100 Contacts

REV:	REV	DESCRIPTION	DATE
R2	R0	RELEASE	2007.06.14
UNIT:	R1	變更 Contact 材質: Copper Alloy	2009.07.21
mm	R2	2014改為無由料/料號更新(原:CBTB-08F-BXXX)	2014.09.17
SIZE:	R3	圖號更新(原:BTB-08R-BXXX)	
A4			
SHEET:			
3/3			

DESCRIPTION(內容):
0.80mm (0.031") Pitch Board To Board Female connector H=5.05mm
PART NO:
(料 號) CBTB-08FB-BXXX
DWG NO(圖號):
BTB-08R-BXXXB

DRAWN(製圖):
Shih
CHECKED(確認):
MANDY
APPROVAL(核准):
JOHNNY

GENERAL TOLERANCE:
(公差) .X ±0.25
.XX ±0.10
.XXX ±0.05
SCALE(比例):
FREE

