
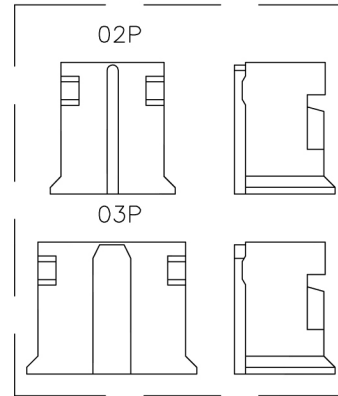



SPECIFICATIONS

Current Rating: 3A AC,DC
 Voltage Rating: 300V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 100MΩ Min
 Withstanding Voltage: 1000V AC/minute
 Material: Nylon 66,UL94V-0,Color:153C~154C

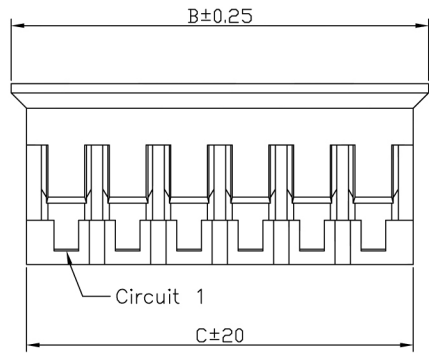

Circuit No.	Dimensions		
	A	B	C
02P	2.00	5.60	4.60
03P	4.00	7.60	6.60
04P	6.00	9.60	8.60
05P	8.00	11.60	10.60
06P	10.00	13.60	12.60
07P	12.00	15.60	14.60
08P	14.00	17.60	16.60
09P	16.00	19.60	18.60
10P	18.00	21.60	20.60
11P	20.00	23.60	22.60
12P	22.00	25.60	24.60
13P	24.00	27.60	26.60
14P	26.00	29.60	28.60
15P	28.00	31.60	30.60

所有材料為
 "環保材料"
 2013.12.12
 RoHS

DESCRIPTION(內容):	DRAWN(製圖):	GENERAL TOLERANCE:	REV: R0	REV	DESCRIPTION	DATE
2.0mm Wire-to-Board Housing	Larry	(公差)	UNIT: mm	R0	RELEASE	2013.12.12
PART NO: (料號) CAE-H20-XX	CHECKED(確認): MANDY	.X ±0.25 .XX ±0.15 .XXX ±0.05	SIZE: A4	R1		
DWG NO(圖號): A2100H-XP	APPROVAL(核准): JOHNNY	SCALE(比例): FREE	SHEET: 1/1	R2		
				R3		