


SPECIFICATIONS

Current rating	: 0.7A AC, DC
Voltage rating	: 30V AC, DC
Temperature range	: -25°C ~ +85°C
Contact resistance	: 20mΩMax
Insulation resistance	: 100MΩMin
Withstanding voltage	: 200 V AC/minute
Finished	: Matte Tin-plated
Housing Material	: Nylon-6T, UL94 V-0

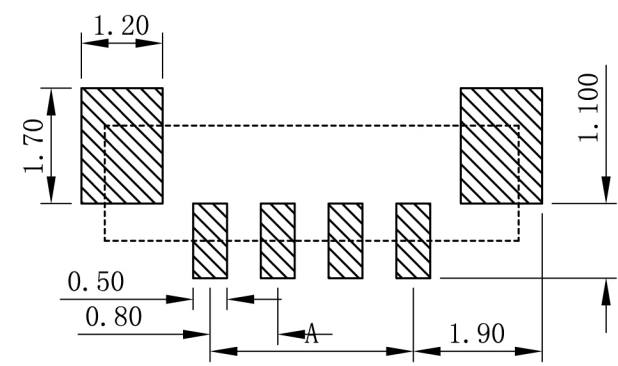

P.C.B LAYOUT

Circuits	Dimension mm		Circuits	Dimension mm	
	A	B		A	B
			12PIN	8.80	11.80
2PIN	0.80	3.80	13PIN	9.60	12.60
3PIN	1.60	4.60	14PIN	10.40	13.40
4PIN	2.40	5.40	15PIN	11.20	14.20
5PIN	3.20	6.20	16PIN	12.00	15.00
6PIN	4.00	7.00	17PIN	12.80	15.80
7PIN	4.80	7.80	18PIN	13.60	16.60
8PIN	5.60	8.60	19PIN	14.40	17.40
9PIN	6.40	9.40	20PIN	15.20	18.20
10PIN	7.20	10.20	21PIN	16.00	19.00
11PIN	8.00	11.00	22PIN	16.80	19.80

DESCRIPTION: 0.8MM WAFER 180° SMT TYPE (環保材料)	DRAWN: 王建平	GENERAL TOLERANCE:	REV: A/4	REV	DESCRIPTION	DATE
	CHECKED:	.X ±0.08 .XX ±0.05 .XXX ±0.03	UNIT: mm	1	△此符號表示重點管控尺寸	2008.03.12
PART NO: CC0801-W08-XX	APPROVAL:	SCALE: 1:1	SIZE: A4	2	更正Layout圖	2009.07.16
			SHEET: 1/1	3	變更電流大小	2012.10.17
				4	修改PCB板示意图	2012.10.17