
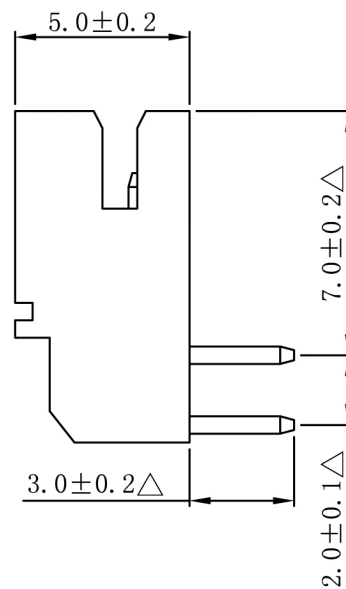


P. C. B Hole Layout

SPECIFICATIONS

Current rating	: 2A AC, DC
Voltage rating	: 250V AC, DC
Temperature range	: -25° C ~ +85° C
Contact resistance	: 10mΩMax
Insulation resistance	: 1000MΩMin
Withstanding voltage	: 800 V AC/minute
Pin Material	: Brass
Finished	: Tin-plated
Housing Material	: Nylon-66+30%GF, UL94 V-0
Color	: 本色

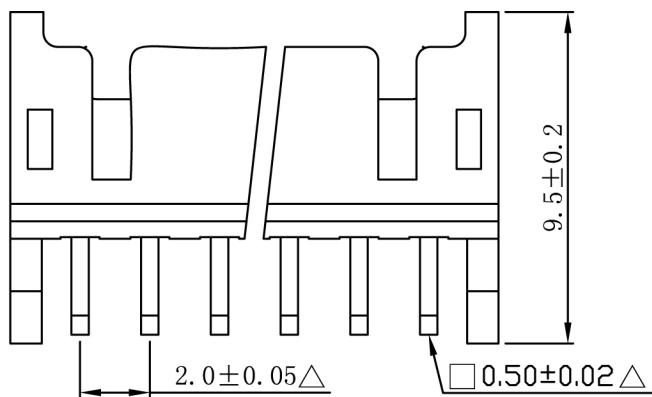

Circuits	Dimension mm	
	A	B
2*02	2.00	6.00
2*03	4.00	8.00
2*04	6.00	10.00
2*05	8.00	12.00
2*06	10.00	14.00
2*07	12.00	16.00
2*08	14.00	18.00
2*09	16.00	20.00
2*10	18.00	22.00
2*11	20.00	24.00
2*12	22.00	26.00
2*13	24.00	28.00
2*14	26.00	30.00
2*15	28.00	32.00
2*16	30.00	34.00
2*17	32.00	36.00
2*18	34.00	38.00
2*19	36.00	40.00
2*20	38.00	42.00

DESCRIPTION(內容): <b>2.0mm Wafer 90° □=0.5</b> 塑膠為本色(環保材料) PART NO: (料號) <b>CCP-HD20R-2*XX</b> DWG NO(圖號):	DRAWN(製圖): 李建安	GENERAL TOLERANCE: (公差)	REV: A/4	REV	DESCRIPTION	DATE
	CHECKED(確認):	.0 ±0.20 .00 ±0.15 .000 ±0.10	UNIT: mm	1	△此符號表示重點管控尺寸	2007.07.18
	APPROVAL(核准):	SCALE(比例): 1:XX	SIZE: A4	2	料號由CP-HD20R-2*XX改為CCP-HD20R-2*XX	2007.10.30
		SHEET: 1/1	3	4	增加Pin數	2011.08.15