

A

B

C

D

E

SPECIFICATIONS

所有材料為
"環保材料"

2006.7.10

RoHS

Electrical

Current Rating: 2A AC, DC

Voltage Rating: 100V AC/ max.

Operating Temp.: -25°C ~ +85°C




Insulation Resistance: 1000M Ω/ min.

Dielectric Withstanding Voltage: 800V AC/ min.

Contact Resistance: 20m Ω/ max.

Material

Material: Nylon 66, UL94V-0

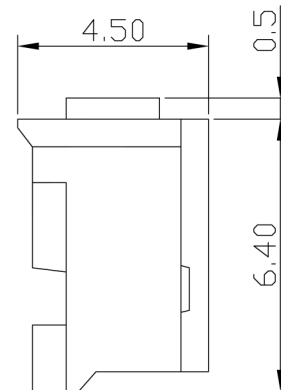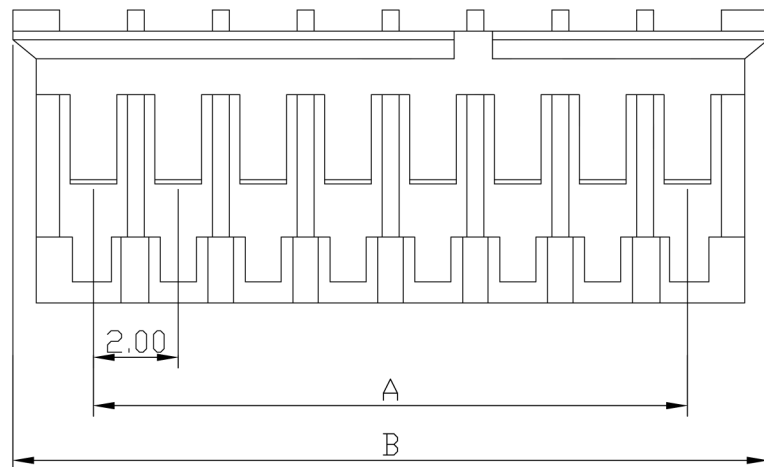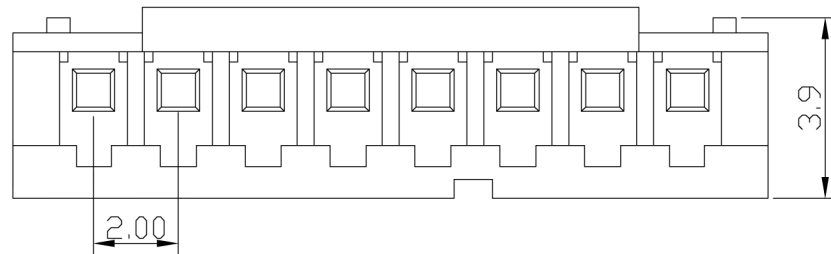

Poles	Dimension mm (in.)		Part No.
	A	B	
2	2.0(0.079)	5.8(0.228)	CP-H20-02
3	4.0(0.157)	7.8(0.307)	CP-H20-03
4	6.0(0.236)	9.8(0.386)	CP-H20-04
5	8.0(0.315)	11.8(0.465)	CP-H20-05
6	10.0(0.394)	13.8(0.543)	CP-H20-06
7	12.0(0.472)	15.8(0.622)	CP-H20-07
8	14.0(0.551)	17.8(0.701)	CP-H20-08
9	16.0(0.630)	19.8(0.780)	CP-H20-09
10	18.0(0.709)	21.8(0.858)	CP-H20-10
11	20.0(0.787)	23.8(0.937)	CP-H20-11
12	22.0(0.886)	25.8(1.016)	CP-H20-12
13	24.0(0.945)	27.8(1.094)	CP-H20-13
14	26.0(1.024)	29.8(1.173)	CP-H20-14
15	28.0(1.102)	31.8(1.252)	CP-H20-15
16	30.0(1.181)	33.8(1.331)	CP-H20-16

DESCRIPTION(內容)	DRAWN(製圖) Gong	GENERAL TOLERANCE: (公差)	REV:	REV	DESCRIPTION	DATE
			R3			
2.0mm Wire-to-Board Housing	CHECKED(確認): Mandy	X.XX ± 0.2 X.X ± 0.3	UNIT:	R0		2006.01.18
			mm	R1	環保料	2006.07.10
PART NO: (料號) CP-H20-XX	APPROVAL(核准): Johnny	SCALE(比例): Free	SIZE:	R2	變更環保章字樣	2006.08.15
DWG NO(圖號): 2000J-H			A4	R3	2014年P數編碼統一兩碼	2014.10.07
			SHEET:			
			1/1			

A

B

C

D

E