



所有材料為  
"環保材料"  
2006.11.08  
RoHS

### Specifications:

- Material: Nylon 66 UL 94V-2
- Voltage Rating: 600V
- Current Rating: 9A
- Withstand Voltage: 1500V AC/Minute
- Insulation Resistance: 1000MΩ min.
- Temperature Range: -40°C ~ +105°C
- Contact Resistance: Initial value/10mΩ max.  
After environmental testing/20mΩ max.

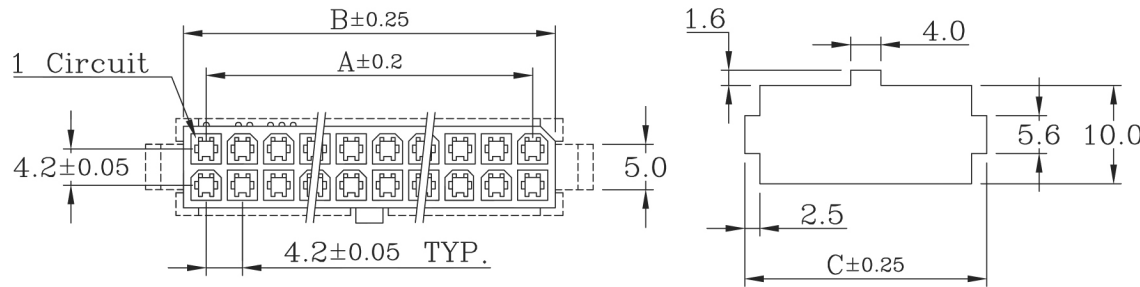

Panel hole dimensions

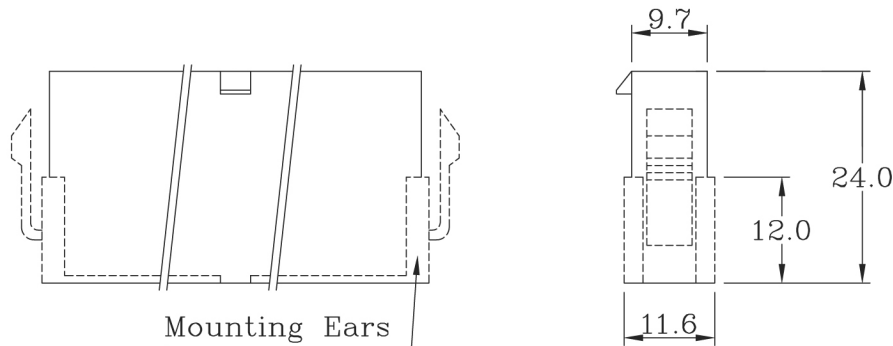

### Dimensional & Ordering Information:

| Circuits | Part No               |                    | Dimensions mm |       |       |
|----------|-----------------------|--------------------|---------------|-------|-------|
|          | Without Mounting Ears | With Mounting Ears | A             | B     | C     |
| 02       | CR-H423F-2X01         | CR-H423F-2X01Y     |               | 5.40  | 10.80 |
| 04       | CR-H423F-2X02         | CR-H423F-2X02Y     | 4.20          | 9.60  | 15.00 |
| 06       | CR-H423F-2X03         | CR-H423F-2X03Y     | 8.40          | 13.80 | 19.20 |
| 08       | CR-H423F-2X04         | CR-H423F-2X04Y     | 12.60         | 18.00 | 23.40 |
| 10       | CR-H423F-2X05         | CR-H423F-2X05Y     | 16.80         | 22.20 | 27.60 |
| 12       | CR-H423F-2X06         | CR-H423F-2X06Y     | 21.00         | 26.40 | 31.80 |
| 14       | CR-H423F-2X07         | CR-H423F-2X07Y     | 25.20         | 30.60 | 36.00 |
| 16       | CR-H423F-2X08         | CR-H423F-2X08Y     | 29.40         | 34.80 | 40.20 |
| 18       | CR-H423F-2X09         | CR-H423F-2X09Y     | 33.60         | 39.00 | 44.40 |
| 20       | CR-H423F-2X10         | CR-H423F-2X10Y     | 37.80         | 43.20 | 48.60 |
| 22       | CR-H423F-2X11         | CR-H423F-2X11Y     | 42.00         | 47.40 | 52.80 |
| 24       | CR-H423F-2X12         | CR-H423F-2X12Y     | 46.20         | 51.60 | 57.00 |

|   |                                       |   |                           |                             |                        |                    |                        |
|---|---------------------------------------|---|---------------------------|-----------------------------|------------------------|--------------------|------------------------|
| <b>DESCRIPTION(內容):</b><br><br><b>4.2mm (.165") Mini-Fit Power Connector / Plug</b><br><br><b>PART NO: CR-H423F-2xXX</b><br><small>(料號) CR-H423F-2xXXY</small><br><br><b>DWG NO(圖號): 4202-H-XXF</b><br><small>4202-H-XX</small> | <b>DRAWN(製圖):</b><br><b>GONG</b>      | <b>GENERAL TOLERANCE:</b><br><small>(公差)</small><br>.000 : ±0.08<br>.00 : ±0.13<br>.0 : ±0.25 | <b>REV:</b><br><b>R3</b>  | <b>REV</b>                  | <b>DESCRIPTION</b>     | <b>DATE</b>        |                        |
|   | <b>CHECKED(確認):</b><br><b>MANDY</b>   |   | <b>UNIT:</b><br><b>mm</b> |                             |                        |                    | <b>R0</b><br><b>R1</b> |
|   | <b>APPROVAL(核准):</b><br><b>JOHNNY</b> | <b>SCALE(比例):</b><br><b>FREE</b>  |                           | <b>SIZE:</b><br><b>A4</b>   | <b>R2</b>              | 2008年圖面版本更新&補充無耳料號 | <b>2008.04.23</b>      |
|   |                                       |   |                           | <b>SHEET:</b><br><b>1/1</b> | <b>R3</b><br><b>R4</b> | 2014年8月料號P數編碼統一兩碼  | <b>2015.01.26</b>      |