




所有材料為
"環保材料"

2006.11.08

RoHS

Specifications:

- Material: Nylon 66 UL 94V-2
- Voltage Rating: 600V
- Current Rating: 9A
- Withstand Voltage: 1500V AC/Minute
- Insulation Resistance: 1000M Ω min.
- Temperature Range: -40°C ~ +105°C
- Contact Resistance: Initial value/10m Ω max.
After environmental testing/20m Ω max.

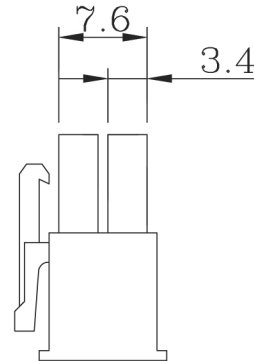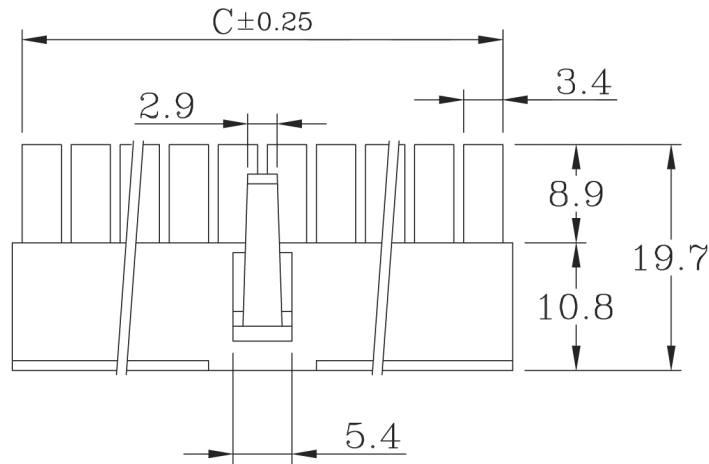

Dimensional & Ordering Information:

Circuits	Part No	Dimensions mm		
		A	B	C
02	CR-H423M-2X01		5.50	3.50
04	CR-H423M-2X02	4.20	9.70	7.60
06	CR-H423M-2X03	8.40	13.90	11.80
08	CR-H423M-2X04	12.60	18.10	16.00
10	CR-H423M-2X05	16.80	22.30	20.20
12	CR-H423M-2X06	21.00	26.50	24.40
14	CR-H423M-2X07	25.20	30.70	28.60
16	CR-H423M-2X08	29.40	34.90	32.80
18	CR-H423M-2X09	33.60	39.10	37.00
20	CR-H423M-2X10	37.80	43.30	41.20
22	CR-H423M-2X11	42.00	47.50	45.40
24	CR-H423M-2X12	46.20	51.70	49.60

DESCRIPTION(內容):
4.2mm (.165") Mini-Fit Power Connector

PART NO:
(料號) **CR-H423M-2xXX**

DWG NO(圖號): **4201-H**

DRAWN(製圖):
GONG

CHECKED(確認):
MANDY

APPROVAL(核准):
JOHNNY

GENERAL TOLERANCE:
(公差)

.000 : ±0.08
.00 : ±0.13
.0 : ±0.25

SCALE(比例):
FREE

REV:
R4

UNIT:
mm

SIZE:
A4

SHEET:
1/1

REV

R0 環保料
R1 加入RoHS章
R2 修改接觸阻抗單位
R3 2008年圖面版本更新
R4 2014年8月料號P數編碼統一兩碼

DESCRIPTION

DATE

2006.03.21
2006.11.08
2006.11.20
2008.04.23
2015.01.26